07 Draw Latch

Over-center · Living hinge

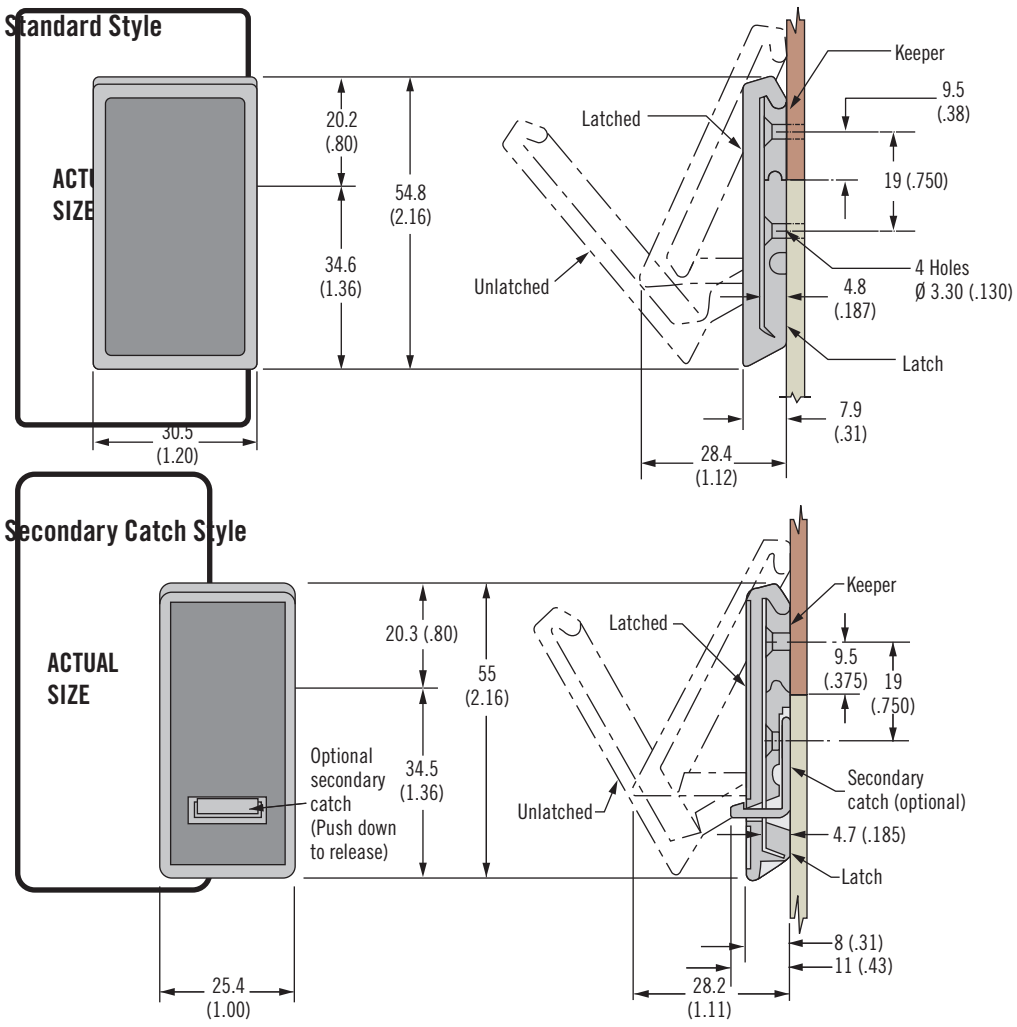

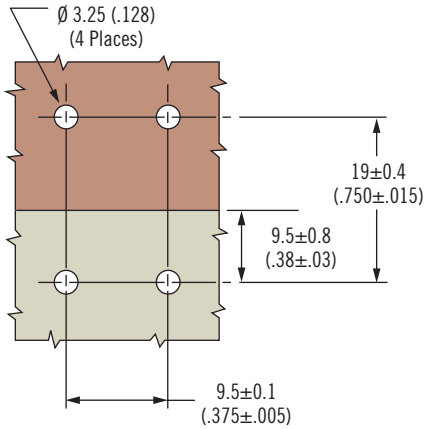

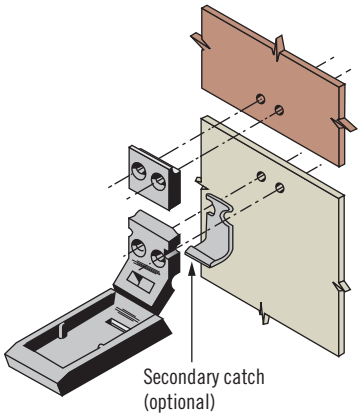

- **Low profile one piece molded latch**
- **Concealed mounting**
- **Secondary catch option to prevent accidental opening**

Material and Finish

Polypropylene black or white
Secondary catch: acetal black or red

Performance Details

Maximum working load:
Standard: 445 N (100 lbf)

Secondary catch: 310 N (70 lbf)

Operating temperature range:
0°C (32°F) to 65°C (150°F)

Flammability rating: UL94-HB

Installation Notes

Install assembly with four Ø 3 (.125) flat head rivets or M3 (No. 4) flat head screws (not supplied)

Part Number Selection

Assembly complete with keeper

B **Base type**

2 Standard
5 Secondary catch

07 - 10 - B 01- F

F **Finish**

11 White (standard only)
12 Black (standard only)
70 Black with red secondary catch
72 Black with black secondary catch

Dimensions in millimeters (inch) unless otherwise stated