



91 Draw Latch

Under-center · Adjustable

southco[®]
CONNECT · CREATE · INNOVATE

- Adjustable grip
- Kick out feature disengages from keeper
- Secondary catch option to prevent accidental opening

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Maximum working load:

With 91-600 keeper:

1325 N (300 lbf)

With K4-2338 keeper:


1550 N (350 lbf)

Installation Notes


M4 (No. 8) screws (not supplied)

Latch

Exposed Base (Secondary catch option shown)

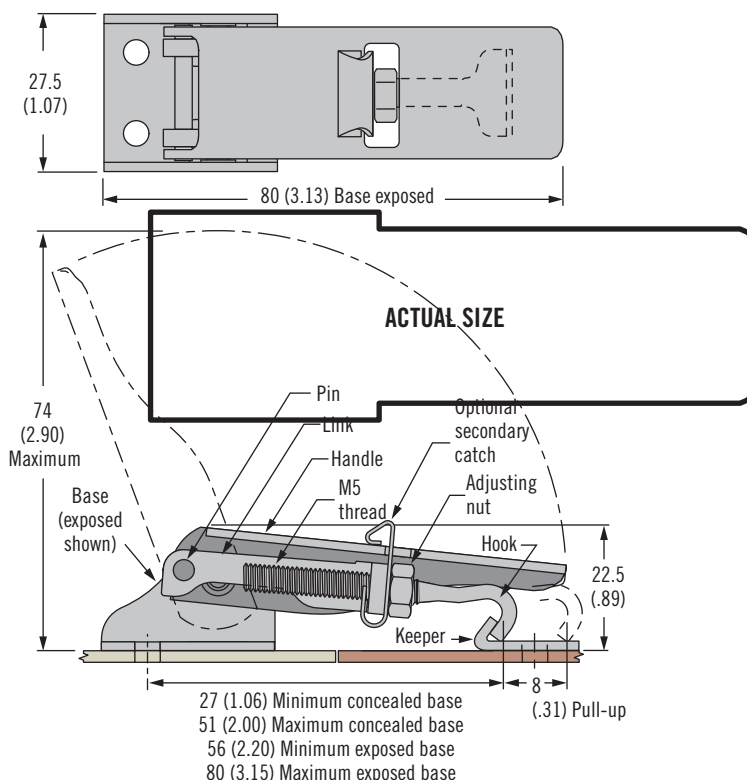


Concealed Base (Hasp option shown)

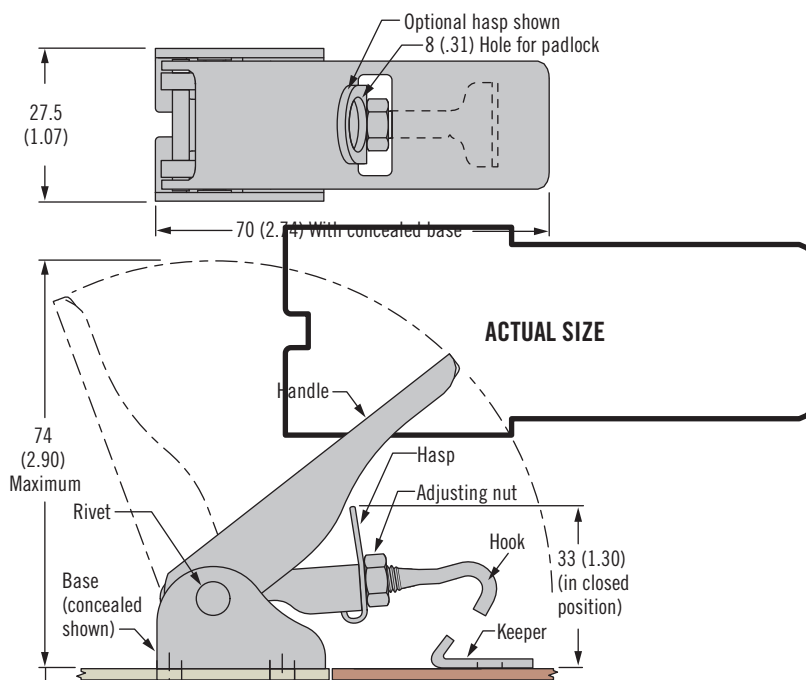


Keepers


Concealed

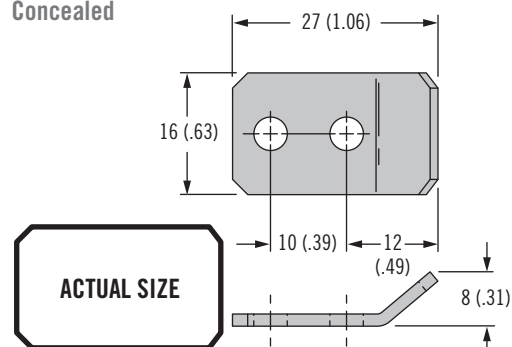


Exposed

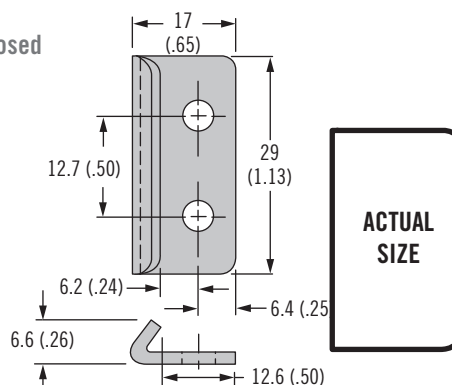


Exposed Base and Concealed Keeper

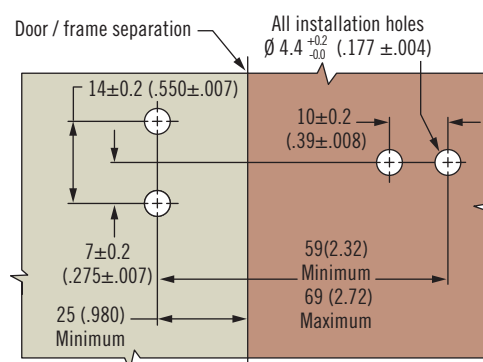


Exposed Base and Exposed Keeper

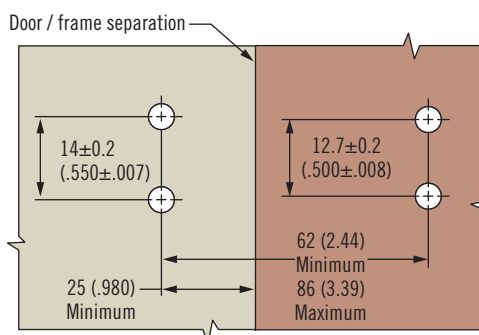

Concealed Base and Concealed Keeper

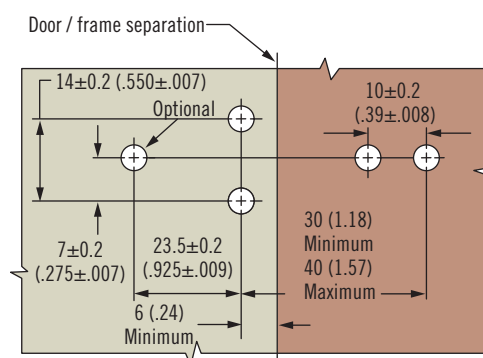

Concealed Base and Exposed Keeper

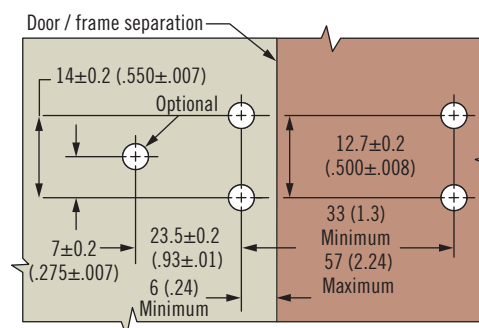

B Base type

- 1 Concealed
- 2 Concealed with secondary catch
- 3 Concealed with padlock hasp
- 5 Exposed
- 6 Exposed with secondary catch
- 7 Exposed with padlock hasp

F Finish

- 07 Steel, zinc plated
- 52 Stainless steel

91 - 5 - **B** 2 - **F**

Finish	Keeper Part Number	
	Concealed	Exposed
Steel	91-600-07	K4-2338-07
Stainless Steel	91-600-52	K4-2338-52
Stainless Steel, Black	91-600-63	K4-2338-63

Part Number Selection

Order latch and keeper separately
For latch part number see builder
For keeper part number see table



91 Draw Latch

Under-center · Adjustable

southco[®]
CONNECT · CREATE · INNOVATE

- Adjustable grip
- Secondary catch option to prevent accidental opening

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Maximum working load

Stainless steel: 710 N (160 lbf)


Steel, zinc plated: 1200 N (270 lbf)

Installation Notes


Ø 2.5 (No. 3) screws (not supplied)

Latch

Standard

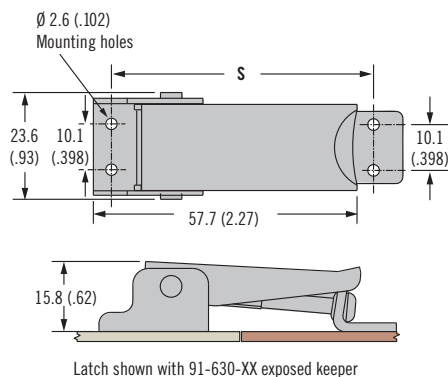


Secondary Catch


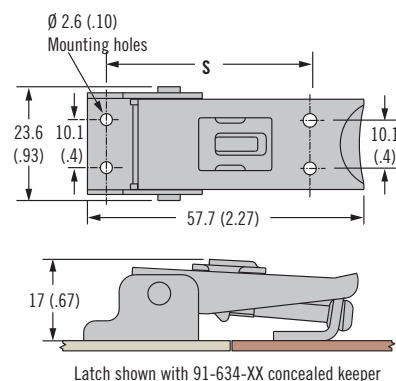


Keeper

Exposed

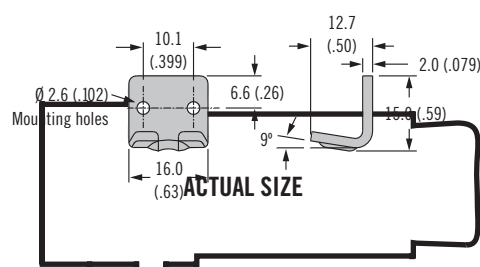

Concealed

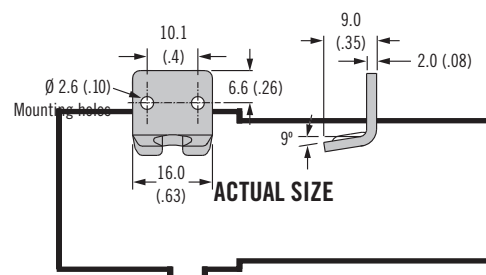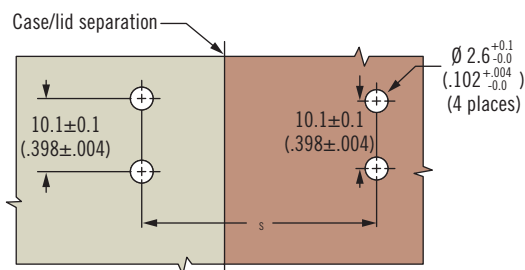

Part Number

See table

Order latch and keeper separately

Material	Latch Part Number	
	Standard	Secondary Catch
Steel	91-351-07	91-361-07
Stainless Steel	91-351-52	91-361-52

S	Keeper Type	Steel	Stainless Steel
		91-634-07	91-634-52
39 - 47 (1.53 - 1.85)	Concealed	91-634-07	91-634-52
52 - 60 (2.04 - 2.36)	Exposed	91-630-07	91-630-52

southco®
CONNECT · CREATE · INNOVATE

Assembly complete with keeper

INFO CLIC

Technical drawing of the padlock assembly showing dimensions in inches and millimeters. The drawing includes a side view of the padlock body and a detail view of the shackle. Dimensions are provided for the body, shackle, and mounting plate. The shackle has a hole for a padlock shackle. The mounting plate is labeled "Door Frame".

Dimensions (Inches / Millimeters):

- Overall length: 89 (3.51)
- Body length: 92.5 (3.64)
- Body diameter: Ø 5.1 (.200) (2 Holes)
- Body thickness: 30 (1.18)
- Body hole diameter: Ø 5.1 (.200) (2 Holes)
- Body hole spacing: 15.9 (.625)
- Body hole offset: 27.2 (1.07)
- Shackle length: 56.1 (2.21) nom. Adjusts ±0.6 (.23)
- Shackle hole diameter: Ø 7.1 (.281) Hole for padlock shackle
- Shackle hole offset: 11.1 (.437)
- Shackle hole spacing: 22.0 (.88)
- Shackle hole offset: 5.1 (.20)
- Shackle hole offset: 28.7 (1.13)
- Shackle hole offset: 19.0 (.75)
- Shackle hole offset: 1.5 (.060)
- Shackle hole offset: 10.2 (.40)
- Shackle hole offset: 36.3 (1.43)
- Shackle hole offset: 14.8 (.58)
- Shackle hole offset: 2.3 (.13)
- Shackle hole offset: 21.0 (.83)


ACTUAL SIZE

Door Frame

Type	Part Number	
	Steel	Stainless Steel
Standard Latch	91-752-07	91-752-52
Latch with Padlock Hasp	91-772-07	91-772-52



Order latch and keeper separately

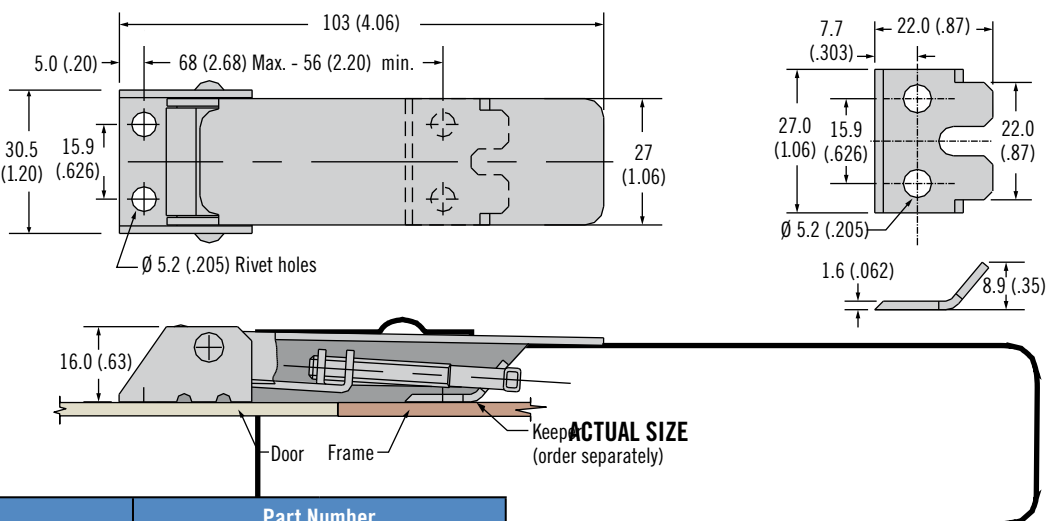

Type	Part Number	
	Steel	Stainless Steel
Latch	91-751-07	91-751-52
Keeper	91-674-07	91-674-52

