

A1 Draw Latch

Over-center · Adjustable

southco®
CONNECT · CREATE · INNOVATE

- Hooked latching rod
- Latching arm adjusts to fit your grip range

Material and Finish

Stainless steel or steel, zinc plated
Grip: Vinyl yellow

Performance Details

Latched at end of hook:

Small:

Maximum static load:
1200 N (270 lbf)

Medium:

Maximum static load:
1780 N (400 lbf)

Latched at center of radius:

Small:

Maximum static load:
1350 N (300 lbf)

Medium:

Maximum static load:
3110 N (700 lbf)

Installation Notes


Small:


Install assembly with four M5
(No. 10) screws or rivets

Medium:


Install assembly with four M6 (1/4)
screws or rivets

Part Number Selection

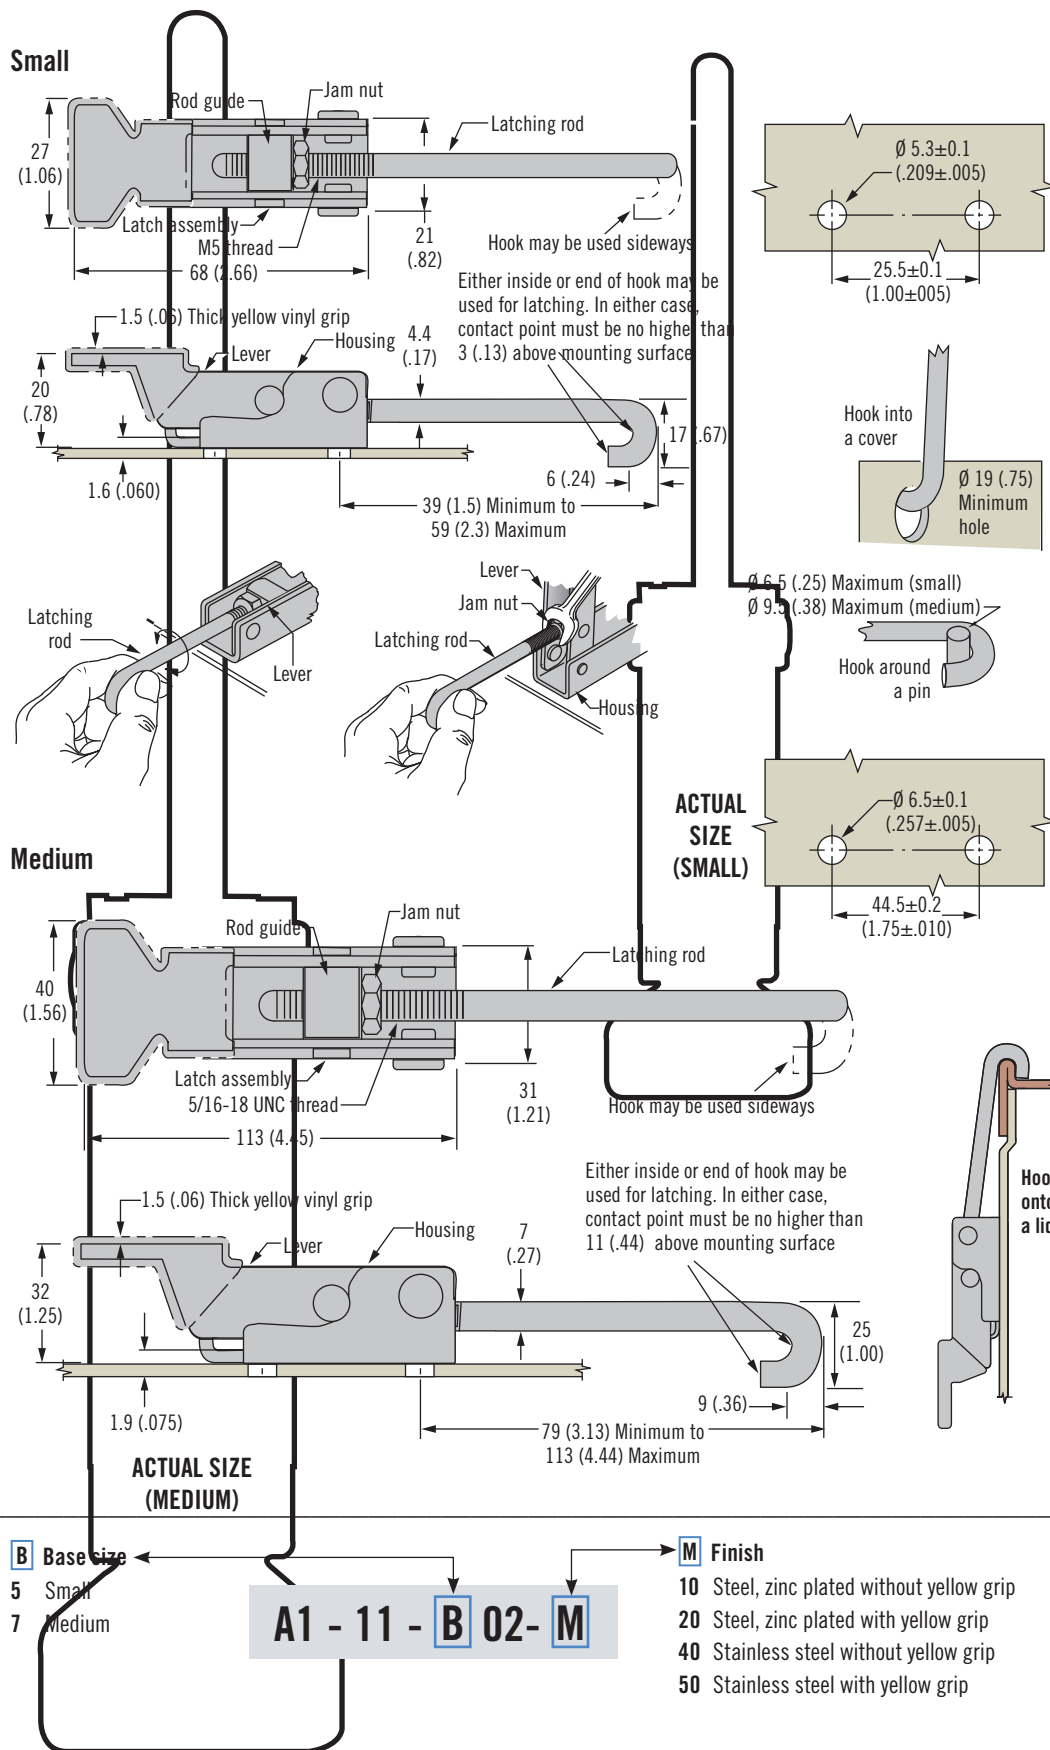





Small

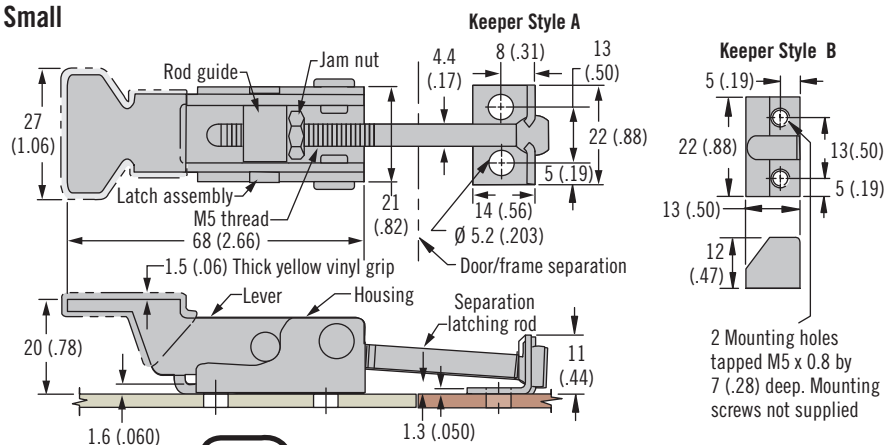


Small Panel Preparation

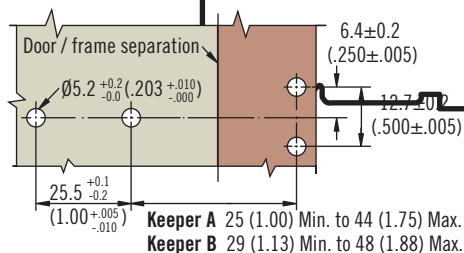

Medium Panel Preparation

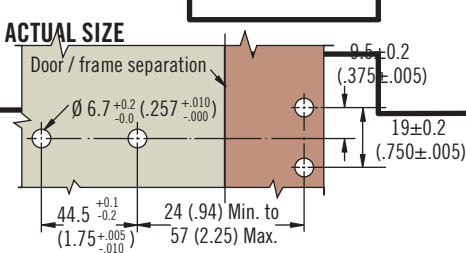

Medium

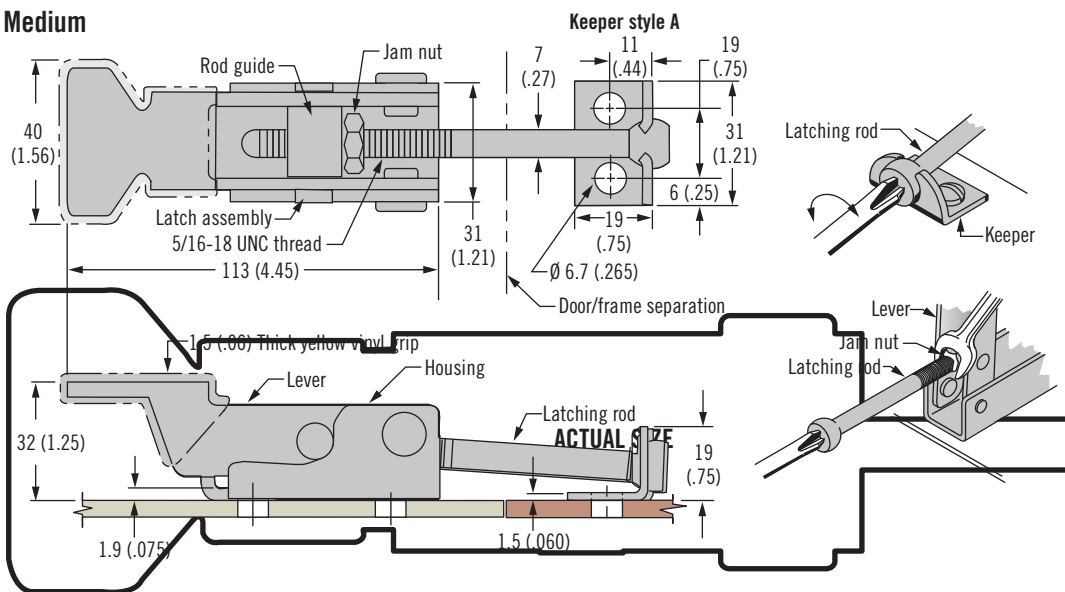

Adjustable grip

Material and Finish

Stainless steel or steel, zinc plated

Grip: Vinyl yellow

Performance Details

Small (keeper style A):

Maximum static load: 180 N (40 lbf)

Small (keeper style B):

Maximum static load:

1550 N (350 lbf)

Medium (keeper style A)

Maximum static load: 890 N (200 lbf)

Installation Notes

Small:

Install assembly with four M5 (No. 10) round head screws or rivets

Medium:

Install assembly with four M6 (1/4) round head screws or rivets

Part Number Selection

Assembly complete with keeper

A1 - 10 - B 0 - K - M

B Base size

- 5 Small
- 7 Medium

K Keeper style

- 1 Type A
- 3 Type B (Small steel, zinc plated models only)

M Finish

- 10 Steel, zinc plated without yellow grip
- 20 Steel, zinc plated with yellow grip
- 40 Stainless steel without yellow grip
- 50 Stainless steel with yellow grip

southco
CONNECT · CREATE · INNOVATE



- Hook may be used sideways. Either inside or end of hook may be used for latching. In either case, contact point must be no higher than 25 (1.00) above mounting surface



See table