





Stal
O cynk



Stal
O cynk

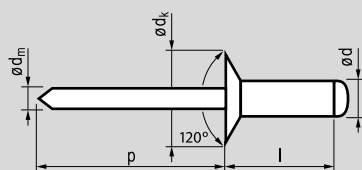

Otwarte | kołnierz wpuszczany

Ø d [mm]	l [+1/-0,2] [mm]	 [mm]	Indeks nr	Ø d _k [mm]	k [mm]	Ø d _m [mm]	p [mm]	 [N]	 [N]
3,0	6,0	1,5-3,0	AA10443006	6,0 [+0/-0,4]	-	~1,90	≥27	1.125	915
[+0,08/-0,10]	8,0	3,0-5,0	3008						
	10,0	5,0-7,0	3010						
Ø 3,1	12,0	7,0-9,0	3012						
3,2	6,0	1,5-3,0	AA10443206	6,0 [+0/-0,4]	-	~2,00	≥27	1.285	1.060
[+0,08/-0,10]	8,0	3,0-5,0	3208						
	10,0	5,0-7,0	3210						
Ø 3,3	12,0	7,0-9,0	3212						
4,0	6,0	1,5-2,5	AA10444006	7,5 [+0/-0,5]	-	~2,50	≥27	1.990	1.550
[+0,08/-0,15]	8,0	2,5-4,5	4008						
	10,0	4,5-6,5	4010						
Ø 4,1	12,0	6,5-8,5	4012						
	14,0	8,5-10,5	4014						
	16,0	10,5-12,5	4016						
4,8	8,0	2,5-4,5	AA10444808	9,0 [+0/-0,5]	-	~2,90	≥27	2.920	2.300
[+0,08/-0,15]	10,0	4,5-6,0	4810						
	12,0	6,0-8,0	4812						
Ø 4,9	14,0	8,0-10,0	4814						
	16,0	10,0-11,5	4816						
	18,0	11,5-13,5	4818						
	20,0	13,5-15,5	4820						

W ofercie nity o niestandardowych wymiarach.