




**Stal nierdzewna [A2]**  
Polerowany



**Stal nierdzewna [A2]**  
Polerowany

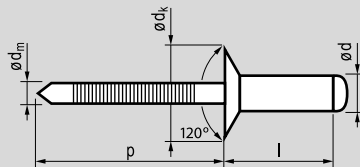

## Otwarte | kołnierz wpuszczany

| Ø d           | l<br>[+1/-0,2] |           | Indeks nr  | Ø d <sub>k</sub> | k    | Ø d <sub>m</sub> | p    |       |       |
|---------------|----------------|-----------|------------|------------------|------|------------------|------|-------|-------|
| [mm]          | [mm]           | [mm]      |            | [mm]             | [mm] | [mm]             | [mm] | [N]   | [N]   |
| <b>3,2</b>    | 6,0            | 1,5-2,5   | AA10543206 | 6,0<br>[+0/-0,4] | -    | ~2,00            | ≥27  | 2.500 | 1.800 |
| [+0,08/-0,10] | 8,0            | 2,5-4,5   | 3208       |                  |      |                  |      |       |       |
|               | 10,0           | 4,5-6,5   | 3210       |                  |      |                  |      |       |       |
| Ø 3,3         | 12,0           | 6,5-8,5   | 3212       |                  |      |                  |      |       |       |
| <b>4,0</b>    | 6,0            | ~2,0      | AA10544006 | 7,5<br>[+0/-0,5] | -    | ~2,50            | ≥27  | 3.800 | 3.100 |
| [+0,08/-0,15] | 8,0            | 2,0-4,0   | 4008       |                  |      |                  |      |       |       |
|               | 10,0           | 4,0-6,0   | 4010       |                  |      |                  |      |       |       |
| Ø 4,1         | 12,0           | 6,0-8,0   | 4012       |                  |      |                  |      |       |       |
|               | 15,0           | 9,0-11,0  | 4015       |                  |      |                  |      |       |       |
| <b>4,8</b>    | 8,0            | 1,5-3,0   | AA10544808 | 9,0<br>[+0/-0,5] | -    | ~2,90            | ≥27  | 6.000 | 4.500 |
| [+0,08/-0,15] | 10,0           | 3,0-5,0   | 4810       |                  |      |                  |      |       |       |
|               | 12,0           | 5,0-7,0   | 4812       |                  |      |                  |      |       |       |
| Ø 4,9         | 15,0           | 8,0-10,0  | 4815       |                  |      |                  |      |       |       |
|               | 18,0           | 11,0-13,0 | 4818       |                  |      |                  |      |       |       |
|               | 21,0           | 14,0-16,0 | 4821       |                  |      |                  |      |       |       |
|               | 25,0           | 18,0-20,0 | 4825       |                  |      |                  |      |       |       |

W ofercie nity o niestandardowych wymiarach.