


**Miedź**

Polerowany

**Stal**

O cynk

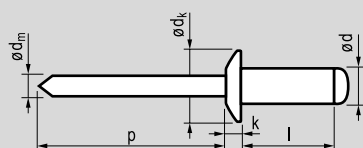

Otwarte | kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,0	6,0	1,0-3,0	AA11013006	6,5 [+0/-0,7]	0,8 [+/-0,2]	~1,75	≥27	700	600
[+0,08/-0,10]	8,0	3,0-5,0	3008						
	10,0	5,0-7,0	3010						
Ø 3,1	12,0	7,0-9,0	3012						
3,2	6,0	1,0-3,0	AA11013206	6,5 [+0/-0,7]	0,8 [+/-0,2]	~1,95	≥27	800	700
[+0,08/-0,10]	8,0	3,0-5,0	3208						
	10,0	5,0-7,0	3210						
Ø 3,3	12,0	7,0-9,0	3212						
4,0	6,0	1,0-2,5	AA11014006	8,0 [+0/-1,0]	1,0 [+/-0,3]	~2,10	≥27	1.500	1.000
[+0,08/-0,15]	8,0	2,5-4,5	4008						
	10,0	4,5-6,5	4010						
Ø 4,1	12,0	6,5-8,5	4012						
	14,0	8,5-10,5	4014						
	16,0	10,5-12,5	4016						
4,8	8,0	1,5-3,5	AA11014808	9,5 [+0/-1,0]	1,1 [+/-0,3]	~2,70	≥27	2.000	1.500
[+0,08/-0,15]	10,0	3,5-5,5	4810						
	12,0	5,5-7,5	4812						
Ø 4,9	14,0	7,5-9,5	4814						
	16,0	9,5-11,5	4816						

W ofercie nity o niestandardowych wymiarach.