




Stal

Ocynk



Stal

Ocynk

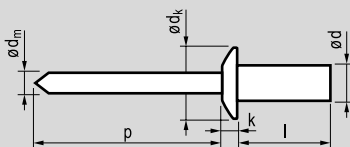

Szczelne | kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	6,0	0,5-1,5	AA12413206	6,0 [+/-0,24]	1,0 [+/- 0,3]	~1,90	≥27	2.200	1.600
[+0,08/-0,10]	8,0	1,5-3,0	3208						
	9,5	3,0-5,0	3209						
Ø 3,3	12,0	5,0-7,0	3212						
4,0	6,0	0,5-1,5	AA12414006	8,0 [+/-0,29]	1,4 [+/- 0,3]	~2,30	≥27	2.500	2.300
[+0,08/-0,10]	8,0	1,5-3,0	4008						
	10,0	3,0-5,0	4010						
Ø 4,1	12,0	5,0-6,5	4012						
	15,0	6,5-10,5	4015						
4,8	8,0	1,0-3,0	AA12414808	9,5 [+/-0,29]	1,7 [+/- 0,3]	~2,90	≥27	3.800	2.900
[+0,08/-0,10]	9,5	3,0-5,0	4809						
	12,0	5,0-6,5	4812						
Ø 4,9	16,0	6,5-10,5	4816						

W ofercie nity o niestandardowych wymiarach.