





Stal
Ocynk

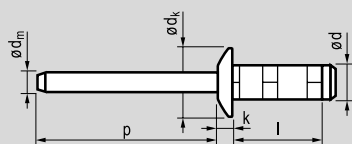

Stal
Ocynk



UNIGRIP | multigrip | kołnierz standardowy

Ø d	l [+1/-0,2]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2 [+0,08/-0,15] Ø 3,3	9,0	1,5-4,0	AA14613209	7,2 [+/-0,25]	1,00 [+/-0,15]	~2,10	≥27	1.700	1.500
4,0 [+0,08/-0,15] Ø 4,1	10,8 12,5	1,5-4,5 3,0-6,0	AA14614010 4012	8,1 [+/-0,25]	1,20 [+/-0,15]	~2,63	≥27	2.350	1.955
4,8 [+0,08/-0,15] Ø 4,9	10,2 12,7 17,5	1,5-4,5 3,5-7,5 8,0-12,0	AA14614810 4812 4817	9,8 [+/-0,25]	1,75 [+/-0,25]	~3,40	≥27	3.600	3.335

W ofercie nity o niestandardowych wymiarach.