




Stal
Ocynk



Stal
Ocynk

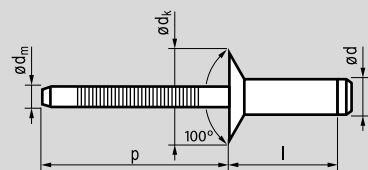

UNILOCK | wzmacnione | kołnierz wpuszczany

Ø d	l [+1/-0,2]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
6,4	11,5	3,8-5,8	AA14746411	10,0 [+/-0,3]	2,0 [+/-0,2]	~4,17	≥32	5.490	min. 5.390 max. 10.300
[+0,11/-0,05]	12,5	4,8-6,8	6412						
	13,5	5,8-7,8	6413						
Ø 6,6 [6,8 max]	15,5	7,8-9,8	6415						
	17,5	9,8-11,8	6417						
	19,5	11,8-13,8	6419						

W ofercie nity o niestandardowych wymiarach.