



AA1511





Aluminium [AlMg2,5]

Polerowany




Aluminium [AlMg6,0]

Polerowany

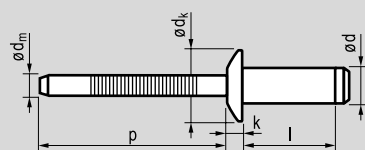

UNILOCK | wzmocnione | kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
6,4	10,5	2,8-4,8	AA15116410	13,0 [+0/-0,3]	3,0 [+/-0,2]	~4,17	≥32	3.500	5.000
[+0,11/-0,05]	12,5	4,8-6,8	6412						
	14,5	6,8-8,8	6414						
Ø 6,6 [6,8 max]	16,5	8,8-10,8	6416						
	18,5	10,8-12,8	6418						
	20,5	12,8-14,8	6420						

W ofercie nity o niestandardowych wymiarach.