




Aluminium [AlMg2,5]
Polerowany



Aluminium [AlMg6,0]
Polerowany

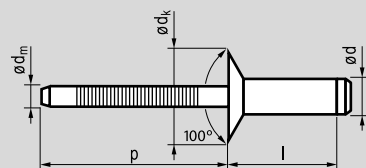

UNILOCK | wzmocnione | kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
6,4	11,5	3,8-5,8	AA15146411	10,0 [+0/-0,3]	2,0 [+/-0,2]	~4,17	≥32	3.000	4.000
[+0,11/-0,05]	13,5	5,8-7,8	6413						
	15,5	7,8-9,8	6415						
Ø 6,6 [6,8 max]	17,5	9,8-11,8	6417						
	18,5	11,8-13,8	6418						
	21,5	13,8-15,8	6421						

W ofercie nity o niestandardowych wymiarach.