
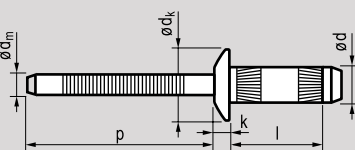


**Stal**

O cynk

**Stal**

O cynk



UNIBULB | wzmocnione | kołnierz standardowy

Ø d	l [+/-0,99]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	7,0	1,0-3,0	AA16213207	6,0 [+/-0,24]	≤1,4	~2,10	≥27	1.300	1.200
[+0,09/-0,15]	9,0	3,0-5,0	3209						1.700
 Ø 3,3 [3,4 max]	11,0	5,0-7,0	3211						2.500
4,0	8,0	1,0-3,0	AA16214008	7,8 [+/-0,24]	≤1,7	~2,60	≥27	2.800	3.700
[+0,09/-0,15]	10,0	3,0-5,0	4010						5.200
 Ø 4,1 [4,3 max]	12,0	5,0-7,0	4012						5.200
4,8	9,0	1,5-3,5	AA16214809	9,3 [+/-0,24]	≤2,0	~3,10	≥27	3.800	3.600
[+0,09/-0,15]	12,0	3,5-6,0	4812						4.200
 Ø 4,9 [5,1 max]	14,0	6,0-8,5	4814						5.600

W ofercie nity o niestandardowych wymiarach.