

Features

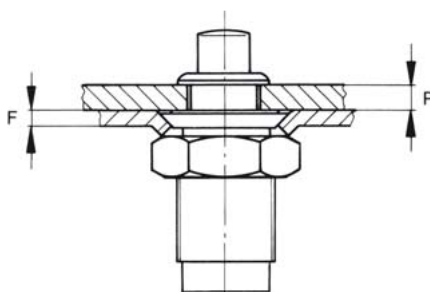
Max. tensile strength 1.330 N, working load 930 N.

Quick opening and closing by a push of the finger.

Easy installation with single hole mounting.

Selection Instructions

1. Select stud assembly, page K-2 and receptacle, page K-3.
2. Select retaining washer, page K-2 and retaining hexnut, page K-3, if necessary.
3. Select stud length number from Panel thickness P using the table below, insert into stud part number * (e.g. 15S1-*-1AD).

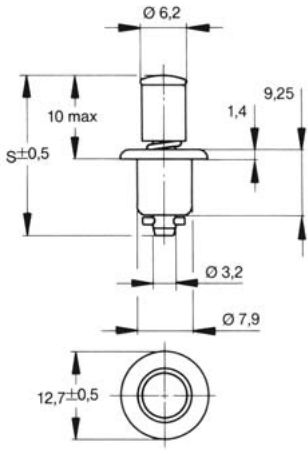


Stud Length Table

Panel Thickness P	Stud Length No.
0,7 - 2,3	1
2,3 - 3,8	3
3,8 - 5,3	5
5,3 - 6,9	7
6,9 - 8,4	9
8,4 - 9,9	11
9,9 - 11,4	13
11,4 - 13,0	15

Other lengths on request.


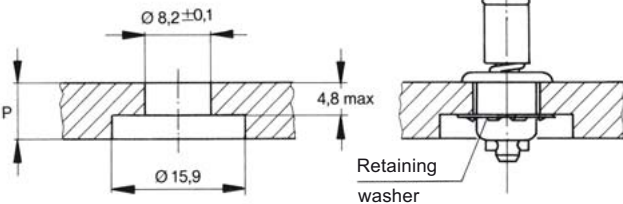


 Preferred dash-lengths

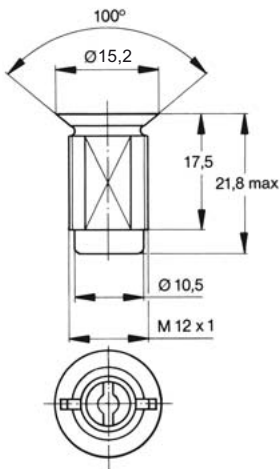
Style	Dimensions	Materials / Finish	°C	Part No.
	 <p>S=22,4 + (0,76 x length no.)</p>	Steel / nickel-plated	120	15S1- *-1AD
		Steel / zinc-plated CrVI-free, clear passivation	120	15S1- *-1AJ

* Length no. from Table, see page K-1.

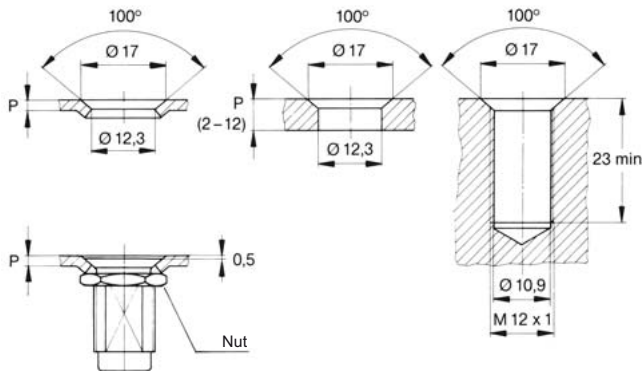

Other lengths and surfaces can be ordered upon request.

Stud Installation Instructions

Installation Dimensions	Accessories	Materials / Finish	Part No.
<p>Panel thickness up to 4,8</p>  <p>Panel thickness from 4,8 + up</p>  <p>Retaining washer</p>	<p>Retaining washer</p> 	Stainless steel	15S11-1CJ
	<p>Installation Tool for 15S11-1CJ retaining washer</p>		T107-1

Style	Dimensions	Materials / Finish	°C	Part No.
		Zinc die casting / zinc-plated CrVI-free, clear passivation	120	V15R13-1-1AB

Receptacle Installation Instructions

Installation Dimensions	Accessories	Materials / Finish	Part No.
	<p>Hex Nut</p> 	Steel / zinc-plated, CrVI-free, clear passivation	V15R14-1-1AB