Camloc
Traditionally Innovative

V964L Series

Features
Wide grip range (total thickness G up to 15 mm).
Suitable for a large range of applications.
Easy installation with single-hole mounting.
Either tool-operated (slotted recess head) or hand-operated (fixed wing head).
Clockwise locking 3/4 turn maximum.

Part no. example
Pawl Latches, slotted recess head, with decorative washer.

V964L 01 -1 -2AG

- Variant
- Head style (slotted recess)
- Style
- Series

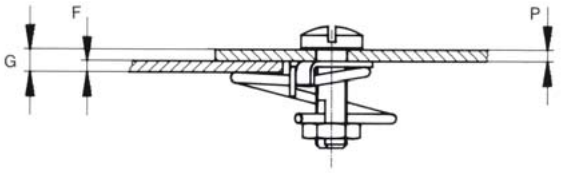

G = P + F

Style	Dimensions	Materials / Finish	°C	Part No.
Slotted Recess Head		Stud: Steel / zinc-plated CrVI-free, clear passivation Spring: Stainless steel	120	**V964L01-1-1AG**
Slotted Recess Head with Decorative Washer		Stud: Steel / zinc-plated CrVI-free, clear passivation Spring: Stainless steel	120	**V964L01-1-2AG**
Fixed Wing Head		Stud: Steel / zinc-plated CrVI-free, clear passivation Spring: Stainless steel Wing: Plastic (POM) black	-40 up to +100	**V964L01-2-1AG**

Installation Dimensions

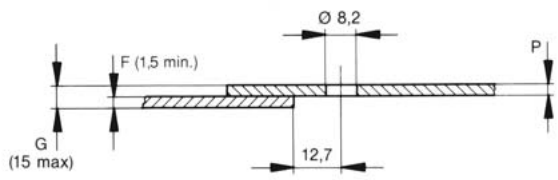

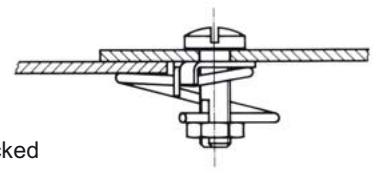

Locked

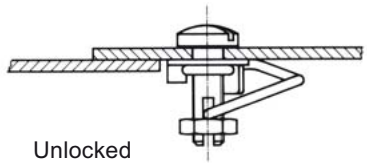

Unlocked