Camloc
Traditionally Innovative

V965L Series

Features

Variable grip fastener. Available in two grip ranges from 1,0 mm to 18,8 mm.
Tool or hand operated head styles available.
Single hole mounting - low installation cost.
Clockwise locking as standard.
Counterclockwise locking fasteners upon request.

Part no. example

Pawl Latches, Flat head.
Grip range 1,0 mm - 12,2 mm.

V965L 23 -1 R1AG

- Locking Direction
- Grip Range (1,0 mm - 12,2 mm)
- Head Style
- Series

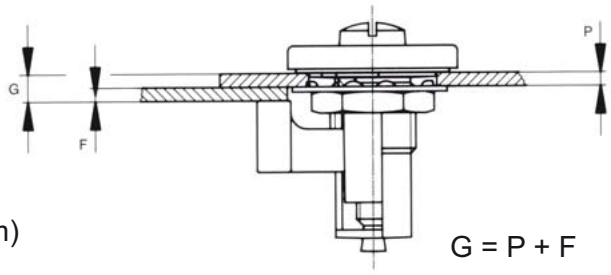

G = P + F

Style	Dimensions	Materials / Finish	°C	Part No.
Flat Head **Grip Range** **1,0 up to 12,2** 	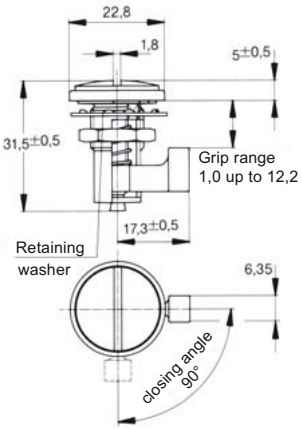	Steel / zinc-plated CrVI-free, clear passivation	-40 up to +100	**V965L23-1R1AG**
Flat Head **Grip Range** **7,6 up to 18,8** 	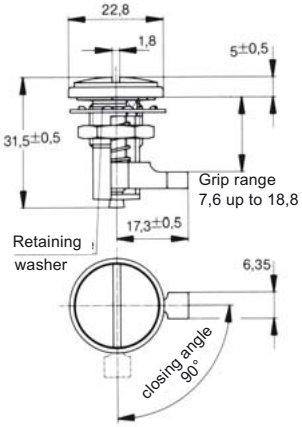	Steel / zinc-plated CrVI-free, clear passivation	-40 up to +100	**V965L23-2R1AG**

V965L Series
Pawl Latches

Style	Dimensions	Materials / Finish	°C	Part No.
Knurled Head **Grip Range** **1,0 up to 12,2** 	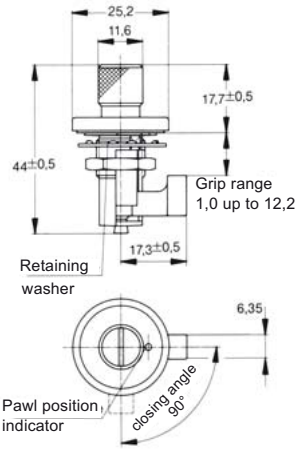	Steel / zinc-plated CrVI-free, clear passivation	-40 up to +100	**V965L1-1R1AG**
Knurled Head **Grip Range** **7,6 up to 18,8** 	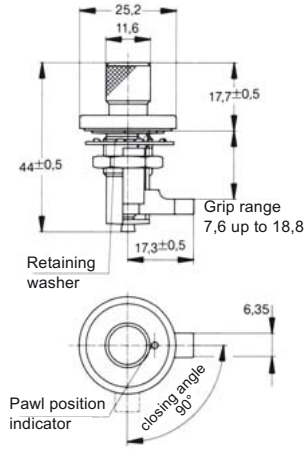	Steel / zinc-plated CrVI-free, clear passivation	-40 up to +100	**V965L1-2R1AG**

Pawl Latches Installation Instructions

Instruction Dimensions
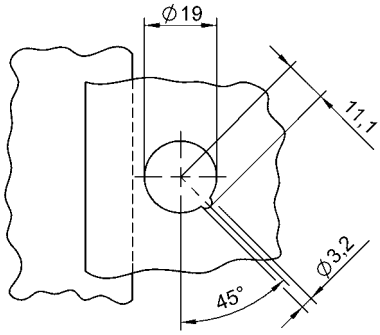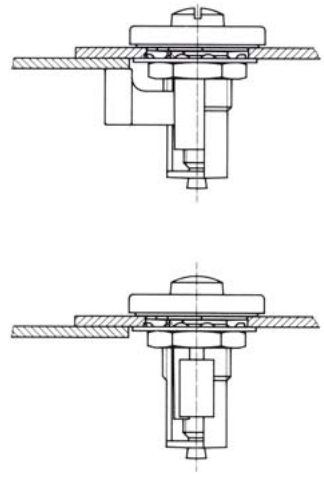
Clockwise locking