# Bolting

## CP719

### Compact & fast

**FEATURES**
- **1/4" impact wrench with Ring retainer**
- DYNA-PACT mechanism (Pin clutch) in oil bath
- Fast with 7,000 rpm and high number of blow/min.
- One-handed reverse with power regulator integrated

**BENEFITS**
- Compact & light weight for General Maintenance on tight spots
- Lightweight for operator comfort
- Ideal for small fasteners, such as light assembly and repair work

### CP719QC

*Same features as CP719 with 1/4" Hex Quick change*

## CP721

### Durability & performance

**FEATURES**
- **3/8" impact wrench**
- Rocking dog clutch in oil bath
- Built-in power regulator
- ergotnomic handle

**BENEFITS**
- Smooth operation and good durability
- Comfort and compact for easy access
- Great tool for soft joints in general maintenance

## CP7722

### Compact for easier access

**FEATURES**
- **3/8" butterfly impact wrench**
- **for general maintenance**
- Butterfly forward/reverse throttle
- Rocking dog clutch for smooth operations and durability
- 4 positive power settings
- 360° air inlet swivel

**BENEFITS**
- Perfect for assembly/dissasembly operation with limited access areas or vertical tightenings
- Comfort and smooth operation thanks to the clutch benefits
- Excellent maneuverability with the 360° swivel air inlet
- and light weight
- Ideal for the genral maintenance of small engines, compressors, generators, ...

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP719 | T025366 | 1/4" | 2,100 | 7,000 | 5-20 | 7-27 | 30 | 47 | 2.5 | 1.1 | 4.5 | 114 | 8.0 | 3.8 | 2.7 | 1.3 | 88 | 99 | 1/4 |
| CP719QC | T025367 | 1/4" Hex. | 2,100 | 7,000 | 5-20 | 7-27 | 30 | 47 | 2.5 | 1.1 | 4.5 | 114 | 8.0 | 3.8 | 2.7 | 1.3 | 88 | 99 | 1/4 |
| CP721 | T021963 | 3/8" | 1,620 | 11,000 | 5-50 | 7-68 | 75 | 102 | 2.6 | 1.2 | 5.8 | 146 | 10.0 | 4.7 | 4.7 | 3.3 | 87 | 98 | 1/4 |
| CP7722 | 894 107 7220 | 3/8" | 1,400 | 9,500 | 5-65 | 7-88 | 90 | 122 | 2.1 | 1.0 | 6.3 | 160 | 13.0 | 6.0 | 4 | 1.4 | 97 | 108 | 1/4 |

*All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP724H

### High torque in small package

**FEATURES**
- **3/8" impact wrench**
- for general maintenance with ring retainer
- DYNA-PACT (Pin clutch) with oil bath
- One-handed reverse button with 4 positive power settings
- Compact and ergotnomic with rubber grip
- Through handle air exhaust and 360° air inlet swivel

**BENEFITS**
- General Maintenance
- Clutch delivers smooth and comfortable operation
- Robust housing and oil bath clutch provide durability
- Versatile tool ideal for all general repairs and maintenance applications

### CP726H

*Same features as CP724H with 1/2" Square Drive*

## CP6300 RSR

### Powerful, lightweight & durable 3/8" for industrial applications

**FEATURES**
- **3/8" Heavy-duty impact wrench**
- Powerful Single Dog clutch
- Perfect control with a 4-positions regulator
- Aluminum body & steel clutch housing
- Rubber grip & Teasing trigger

**BENEFITS**
- Industrial Maintenance & Production
- Durable housing for versatile applications
- Powerful torque delivery
- Compact and lightweight for operator comfort
- Easy to service

## CP6031 HABAD

### The most reliable 3/8" for intensive applications

**FEATURES**
- **3/8" super industrial impact wrench**
- Reliable 2-jaw clutch oil bath
- Durable aluminum body & indestructible steel clutch housing
- Full Teasing (inside) trigger with durable reverse
- Compact 3-part construction & easy maintenance
- Pin-type socket retainer

**BENEFITS**
- Extreme durability for very intensive & repetitives assembly lines
- Comfortable operation thanks the smooth clutch mechanism
- Ideal for very demanding industries as industrial maintenance and production

### CP6031 HABAK

*Same features as CP6031 HABAD with 1/2" Square Drive*

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP724H | 894 100 7240 | 3/8" | 1,680 | 8,500 | 40-170 | 54-230 | 200 | 271 | 3.1 | 1.4 | 6.0 | 152 | 12.0 | 5.7 | 3.4 | 1.7 | 93 | 104 | 1/4 |
| CP726H | 894 100 7260 | 1/2" | 1,680 | 8,500 | 40-170 | 54-230 | 200 | 271 | 3.1 | 1.4 | 6.0 | 152 | 12.0 | 5.7 | 3.1 | 1.6 | 93 | 104 | 1/4 |
| CP6031 HABAD | T021887 | 3/8" | 2,200 | 10,000 | 23-75 | 30-102 | 130 | 176 | 3.3 | 1.5 | 5.6 | 143 | 25.0 | 12.0 | 7.4 | 4.9 | 88 | 99 | 1/4 |
| CP6031 HABAK | T021884 | 1/2" | 2,200 | 10,000 | 23-75 | 30-102 | 130 | 176 | 3.3 | 1.5 | 5.6 | 143 | 25.0 | 12.0 | 7.4 | 4.9 | 88 | 99 | 1/4 |
| CP6300 RSR | T025285 | 3/8" | 1,800 | 6,800 | 40-150 | 54-203 | 180 | 243 | 3.5 | 1.6 | 6.0 | 152 | 14.0 | 6.6 | 5 | 1.6 | 90 | 101 | 1/4 |

*All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP8222-P

3/8"

COMFORTABLE, ROBUST & COMPACT

### FEATURES

- **3/8" compact impact with pin retainer**
- Powerful & durable twin hammer clutch
- Composite body and aluminum clutch housing
- 3 power settings in forward & full power in reverse
- Protective cover & suspension bail
- Progressive trigger & Rubber grip

### BENEFITS

- Very low noise, very limited vibration and lightweight for operator comfort
- Powerful but easy to control for assembly/dissassembly operations
- Compact for easy access on thight spots
- Durable and reliable impact for Industrial Maintenance and Production applications

**CP8222-P**

**CP8222-R**
*Same features as CP8222-P with ring retainer*

**CP8232-QC**
*Similar features as CP8222-R with 7/16" Hex Quick Change*

## CP7729

3/8"

S2S TECHNOLOGY

BALANCE & POWER

### FEATURES

- **3/8" compact impact wrench** for general maintenance
- Twin hammer clutch
- Composite handle and magnesium clutch housing
- S2S technology and 3 positive power settings
- Full teasing trigger

**CP7739**
*Similar features as CP7729 in Mini 1/2"*

### BENEFITS

- The most powerful 3/8" of its class for general maintenance
- Maximize operator comfort with an extremely light and well balanced design
- Most convenient and unique reverse technology in the market

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP7729 | 894 107 7290 | 3/8" | 1,700 | 9,400 | 50-300 | 68-407 | 415 | 563 | 2.8 | 1.3 | 6.4 | 163 | 20.0 | 9.4 | 6.4 | 1.9 | 91 | 102 | 1/4 |
| CP7739 | 894 107 7390 | 1/2" | 1,700 | 9,900 | 50-305 | 68-414 | 450 | 610 | 2.8 | 1.2 | 6.4 | 163 | 20.0 | 9.4 | 6.9 | 2.5 | 92 | 103 | 1/4 |
| CP8222-P | 615 159 0180 | 3/8" | 1,250 | 11,500 | 60-295 | 80-400 | 332 | 450 | 2.6 | 1.2 | 7.0 | 177 | 21.2 | 10.0 | 5.8 | 2.4 | 89 | 100 | 1/4 |
| CP8222-R | 615 159 0230 | 3/8" | 1,250 | 11,500 | 60-295 | 80-400 | 332 | 450 | 2.6 | 1.2 | 7.0 | 177 | 21.2 | 10.0 | 5.8 | 2.4 | 89 | 100 | 1/4 |
| CP8232-QC | 615 159 0190 | 7/16" Hex. | 1,250 | 11,500 | 60-295 | 80-400 | 332 | 450 | 3.1 | 1.4 | 7.0 | 177 | 21.2 | 10.0 | 6.6 | 3.2 | 89 | 100 | 1/4 |

*All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

# ⅜" - ½" Composite Impact Wrenches

## CP8242-R

½"

COMFORTABLE, ROBUST & COMPACT

### FEATURES
- **1/2" compact impact with ring retainer**
- Powerful & durable twin hammer clutch
- Composite body and aluminum clutch housing
- 3 power settings in forward & full power in reverse
- Protective cover & suspension bail
- Progressive trigger & Rubber grip

### BENEFITS
- Very low noise, very limited vibration and lightweight for operator comfort
- Powerful but easy to control for assembly/dissassembly operations
- Compact for easy access on thight spots
- Durable and reliable impact for Industrial Maintenance and Production applications

**CP8242-P**
*Same features as CP8242-R with pin socket retainer*

## CP8252-P

½"

COMFORTABLE,
ROBUST & VERSATILE

### FEATURES
- **1/2" impact with ring retainer**
- Powerful & durable twin hammer clutch
- Composite body and aluminum clutch housing
- 3 power settings in forward & full power in reverse
- Protective cover & suspension bail
- Progressive trigger & Rubber grip

### BENEFITS
- Very low noise level, limited vibration and lightweight for operator comfort
- Powerful and easy to control for precise assembly jobs
- Durable and reliable impact for Industrial Maintenance and Production applications
- Mutli-purpose tool for a large variety of applications

**CP8252-R**
*Same features as CP8252-P with ring socket retainer*

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP8242-P | **615 159 0200** | 1/2" | 1,250 | 11,500 | 59-295 | 80-400 | 406 | 550 | 2.6 | 1.2 | 7.0 | 177 | 21.2 | 10.0 | 6.6 | 3.2 | 89 | 100 | 1/4 |
| CP8242-R | **615 159 0240** | 1/2" | 1,250 | 11,500 | 59-295 | 80-400 | 406 | 550 | 2.6 | 1.2 | 7.0 | 177 | 21.2 | 10.0 | 6.6 | 3.2 | 89 | 100 | 1/4 |
| CP8252-P | **615 159 0210** | 1/2" | 1,400 | 9,000 | 110-553 | 150-750 | 700 | 950 | 4.4 | 2.0 | 7.9 | 200 | 25.4 | 12.0 | 8.8 | 3.6 | 94 | 105 | 1/4 |
| CP8252-R | **615 159 0250** | 1/2" | 1,400 | 9,000 | 110-553 | 150-750 | 700 | 950 | 4.4 | 2.0 | 7.9 | 200 | 25.4 | 12.0 | 8.8 | 3.6 | 94 | 105 | 1/4 |

*All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP734H

½"

### The "Classic" Reference for 1/2" impact tools

**FEATURES**
- **1/2" impact wrench for general maintenance with ring retainer**
- DYNA-PACT (Pin clutch) with oil bath
- One-handed reverse button with 4 positive power settings
- Compact and ergotnomic with rubber grip
- Through handle air exhaust and 360° air inlet swivel

**BENEFITS**
- General Maintenance
- Clutch delivers smooth and comfortable operation
- Robust housing and oil bath clutch provide durability
- Versatile tool ideal for all general repairs and maintenance applications

### CP734H Kits

**Metric or Imperial**

*See detail on page 30*

## CP749

½"

### Reliable & rugged

**FEATURES**
- **1/2" impact wrench with ring socket retainer**
- CP's patented clutch
- One-handed reverse button with 4-power settings
- Compact design with comfortable contoured handle
- Perfect for general maintenance

**BENEFITS**
- Powerful & resistante motor delivering high torque
- Withstands rough use with operator comfort
- Ideal for general maintenance & repairs

### CP749 Kits

**Metric or Imperial**

*See detail on page 30*

## CP9541

½"

### The industrial grade of the Classic

**FEATURES**
- **1/2" impact wrench with ring socket retainer**
- Fast & reliable DYNA-PACT (Pin clutch) with oil bath
- Aluminum body & steel clutch housing
- Torque regulator at the handle
- Steel Trigger for harsh environement

**BENEFITS**
- Industrial Maintenance & Production
- Best industrial 1/2" impact for Hard joints applications
- Operator comfort due to low vibrations and low noise level
- Good control thanks to the multi-position regulator
- Reliable pin clutch in oil bath & durable housing
- Compact 3-part construction & easy to maintain

### CP9542

*Same features as CP9541 with pin socket retainer*

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP734H | T024351 | 1/2" | 1,020 | 8,400 | 25-310 | 34-420 | 425 | 576 | 5.1 | 2.3 | 7.5 | 191 | 15.0 | 7.1 | 7.2 | 3.3 | 93 | 104 | 1/4 |
| CP749 | T024587 | 1/2" | 1,320 | 6,400 | 50-450 | 68-610 | 610 | 827 | 5.5 | 2.5 | 7.0 | 178 | 22.0 | 10.4 | 6.8 | 2.5 | 96 | 107 | 1/4 |
| CP9541 | 6151909541 | 1/2" | 1,100 | 8,900 | 25-320 | 34-434 | 450 | 610 | 5.5 | 2.5 | 6.6 | 168 | 13.0 | 6.1 | 5.5 | 2.5 | 89 | 100 | 1/4 |
| CP9542 | 6151909542 | 1/2" | 1,100 | 8,900 | 25-320 | 34-434 | 450 | 610 | 5.5 | 2.5 | 6.6 | 168 | 13.0 | 6.1 | 5.5 | 2.5 | 89 | 100 | 1/4 |

*All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

# CP6041 HABAB

½"

THE MOST COMFORTABLE & RELIABLE 1/2" FOR INTENSIVE APPLICATIONS

**FEATURES**
- **1/2" super industrial impact wrench**
- Reliable 2-jaw clutch oil bath
- Durable aluminum body & indestructible steel clutch housing
- Full Teasing (inside) trigger with durable reverse
- Compact 3-part construction & easy maintenance
- Pin-type socket retainer

**BENEFITS**
- Extreme durability for very intensive & repetitives assembly lines
- Comfortable operation thanks the smooth clutch mechanism
- Ideal for very demanding industries as industrial maintenance and production

## CP6041 HABAR

*Same features as CP6041 HABAB with ring type retainer*

# CP6500-RSR

½"

THE BEST HEAVY-DUTY 1/2" FOR THE TOUGHEST JOBS !

## FEATURES
- **1/2" industrial impact wrench with Ring-type socket retainer**
- CP's patented double dog clutch with oil bath
- Durable Aluminum body & steel clutch housing
- Regulator 4 settings & One-hand reverse
- Comfortable handle with rubber grip

## BENEFITS
- Best performer for Industrial Maintenance & Production applications
- Operator comfort and control with a 4-position regulator
- Reliable double-dog clutch in oil bath & durable housing
- Compact 3-part construction for easy maintenance

**CP6500-RSR**

## CP6500-RS

*Same features as CP6500-RSR with pin type socket retainer*

**For soft and very soft joints**

## CP6540-RSR

*Similar to CP6500-RSR with Rocking Dog cluth*

## CP6540-RSS

*Same features as CP6540-RSR with 7/16" Hexagonal Quick Change*

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGHT | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP6041 HABAB | T021888 | 1/2" | 1,700 | 6,500 | 40-250 | 55-339 | 375 | 509 | 6.2 | 2.8 | 6.8 | 173 | 40.0 | 18.9 | 8.8 | 3.2 | 96 | 107 | 1/4 |
| CP6041 HABAR | T022331 | 1/2" | 1,700 | 6,500 | 40-250 | 55-339 | 375 | 509 | 6.2 | 2.8 | 6.8 | 173 | 40.0 | 18.9 | 8.8 | 3.2 | 96 | 107 | 1/4 |
| CP6500-RS | T025214 | 1/2" | 1,320 | 6,400 | 125-502 | 170-680 | 625 | 850 | 5.8 | 2.7 | 7.0 | 178 | 25.0 | 11.8 | 6.8 | 2.5 | 96 | 107 | 1/4 |
| CP6500-RSR | T025216 | 1/2" | 1,320 | 6,400 | 125-502 | 170-680 | 625 | 850 | 5.8 | 2.7 | 7.0 | 178 | 25.0 | 11.8 | 6.8 | 2.5 | 96 | 107 | 1/4 |
| CP6540-RSR | T025313 | 1/2" | 1,320 | 6,400 | 60-250 | 81-340 | 310 | 420 | 6.2 | 2.8 | 7.4 | 188 | 22.0 | 10.4 | 9.2 | 4.0 | 97 | 108 | 1/4 |
| CP6540-RSS | T025314 | 7/16" Hex. | 1,320 | 6,400 | 60-250 | 81-340 | 310 | 420 | 6.2 | 2.8 | 7.4 | 188 | 22.0 | 10.4 | 9.2 | 4.0 | 97 | 108 | 1/4 |

*All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP7759Q

½"

COMFORT & POWER

UNIQUE FEATURES Premium Tool

### FEATURES

- **1/2" composite & carbon fiber impact wrench**
- Rugged technology with carbon fiber inlay
- Lightweight with a magnesium clutch housing and composite handle
- S2S easy forward reverse: Side to Side patented technology
- 780 ft.lbs (1,054Nm) of maximum torque in reverse
- Full teasing trigger
- Integrated mufler for low noise
- Flexible 360° swivel air inlet

### BENEFITS

- New technology optimizing power-to-weight ratio
- for General Maintenance applications
- Maximize operator comfort thanks to Unique CP Handle design
- Side-2-side: the Most convenient reverse technology in the market

**CP7759Q**

## CP7748

½"

EXTREME TORQUE & POWER

### FEATURES

- **1/2" composite impact wrench with ring retainer**
- 920 ft.lbs (1,250Nm) of maximum torque in reverse
- Aluminum clutch & rear housings
- Thermo-plastic rubber injected in housing
- Universal & durable twin hammer mechanism
- Full teasing trigger
- 360° swivel air inlet

### BENEFITS

- General Maintenance
- Maximize work efficiency thanks to extreme torque

See accessories on pages 30 to 34

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP7748 | 894 107 7480 | 1/2" | 1,200 | 8,200 | 75-580 | 102-786 | 920 | 1,250 | 4.4 | 2.0 | 7.6 | 195 | 21.0 | 10.0 | 7.4 | 2.2 | 93 | 104 | 1/4 |
| CP7759Q | 894 107 7518 | 1/2" | 1,200 | 8,000 | 75-460 | 100-630 | 780 | 1,054 | 3.7 | 1.7 | 7.4 | 187 | 23.0 | 11.0 | 8.1 | 1.7 | 93 | 104 | 1/4 |

*All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP7769

### Fast, Powerful & Compact

**FEATURES**
- **3/4" composite impact wrench with dual retainer (hole + ring)**
- 1,440 ft.lbs (1,950Nm) of maximum torque in reverse
- Low consumption air motor at 31 cfm (14.7 l/s)
- Insulating and lightweight composite handle
- S2S easy forward reverse
- Full teasing developed trigger

**BENEFITS**
- Powerful impact for General Maintenance
- Maximize operator comfort: lightweight and balanced design
- Energy savings: low air consumption

**CP7779**
*Same features as CP7769 with 1" square drive*

## CP8272-D

### Robust, Comfortable & Versatile

**FEATURES**
- **3/4" impact with dual retainer (hole + ring)**
- Powerful & durable twin hammer clutch
- Composite body and aluminum clutch housing
- 3 power settings in forward & full power in reverse
- Protective cover & reinforced structure
- Progressive trigger & rubber grip
- Suspension hook available in option

**BENEFITS**
- Durable and reliable impact for industrial Maintenance and Production applications
- Low noise level and vibration combined with lightweight for operator comfort
- Powerful and easy to control for precise assembly jobs
- Mutli-purpose tool for versatile applications

**CP8272-D**

**CP8272-P**
*Same features as CP8272-D with pin type socket retainer*

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP7769 | 894 107 7690 | 3/4" | 1,200 | 7,000 | 300-1,080 | 407-1,464 | 1,440 | 1,950 | 7.4 | 3.4 | 8.4 | 214 | 31.0 | 14.7 | 12.6 | 3.4 | 97 | 108 | 3/8 |
| CP7779 | 894 107 7790 | 1" | 1,200 | 7,000 | 300-1,080 | 407-1,464 | 1,440 | 1,950 | 7.7 | 3.5 | 8.7 | 221 | 31.0 | 14.7 | 12.6 | 3.4 | 97 | 108 | 3/8 |
| CP8272-D | 615 159 0260 | 3/4" | 1,000 | 6,500 | 184-922 | 250-1,250 | 1,217 | 1,650 | 7.3 | 3.3 | 9.1 | 230 | 38.0 | 18.0 | 15.5 | 6.8 | 96 | 107 | 3/8 |
| CP8272-P | 615 159 0220 | 3/4" | 1,000 | 6,500 | 184-922 | 250-1,250 | 1,217 | 1,650 | 7.3 | 3.3 | 9.1 | 230 | 38.0 | 18.0 | 15.5 | 6.8 | 96 | 107 | 3/8 |

*All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP772H

### The unmatched "Reference" in 3/4" impact

**FEATURES**
- **3/4" impact wrench with ring retainer**
- DYNA-PACT oil bath clutch
- One-handed reverse button with 4 settings of power
- Comfortable handle grip
- 360° air inlet swivel

**BENEFITS**
- General Maintenance
- Smooth operation thanks to the DYNA-PACT clutch
- Comfortable use thanks to low noise and vibration levels
- Good durability

### CP772H Kits

**Metric or Imperial**

*See detail on page 30*

## CP7763

### Powerful for General Maintenance applications

**FEATURES**
- **3/4" impact wrench with Ring retainer**
- Twin hammer clutch
- High power: 1,200 ft.lbs (1,627 Nm)
- Combined power regulator with forward/reverse

**BENEFITS**
- Ideal for General Maintenance applications
- Powerful motor and durable clutch
- Operator comfort

### CP7773

*Same features as CP7763 with 1" square drive*

## CP9561

### The industrial grade of the Classic

**FEATURES**
- **3/4" Industrial impact wrench with Hole-type socket retainer**
- DYNA-PACT (Pin clutch) oil bath
- Aluminum body & steel clutch housing
- Durable reverse valve & steel trigger
- Built-in regulator on the handle

**BENEFITS**
- Industrial Maintenance & Production applications
- High performances, especially on hard joints
- Operator comfort due to low vibrations and noise level
- Great control with a multi-position regulator
- Reliable pin clutch in oil bath & durable housing
- Compact 3-part construction & easy to maintain

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 ($m/s^2$) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP772H | **T024598** | 3/4" | 900 | 4,200 | 150-700 | 203-949 | 1,000 | 1,356 | 10.5 | 4.8 | 9.6 | 245 | 24.0 | 11.3 | 5.8 | 2.0 | 96 | 107 | 3/8 |
| CP7763 | **894 107 7630** | 3/4" | 900 | 6,300 | 100-950 | 136-1,288 | 1,200 | 1,627 | 11.6 | 5.3 | 8.8 | 224 | 30.0 | 14.2 | 10.4 | 4.2 | 96 | 107 | 3/8 |
| CP7773 | **894 107 7730** | 1" | 900 | 6,300 | 100-950 | 136-1,288 | 1,200 | 1,627 | 12.1 | 5.5 | 8.8 | 224 | 30.0 | 14.2 | 10.4 | 4.2 | 96 | 107 | 3/8 |
| CP9561 | **615 190 9561** | 3/4" | 900 | 5,500 | 150-700 | 200-950 | 885 | 1,250 | 11.1 | 5.1 | 8.5 | 216 | 30.0 | 14.1 | 7.7 | 2.4 | 100 | 111 | 1/4 |

*All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar) exept CP9561: 3/8" (9.5mm)* *Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

# CP6060 ZASAB

SPARK RESISTANT 3/4"
FOR EXPLOSIVE ENVIRONMENT

## FEATURES

- **Super Industrial 3/4" impact wrench**
- Reliable 2-jaw clutch
- Zinc-Aluminum alloy body & steel clutch housing
- Durable reverse valve & steel Trigger
- Compact 3-part construction & easy maintenance
- Hole type socket retainer with o-Ring

## BENEFITS

- Spark resistant 3/4" for Oil, Gas & Petrochemical or Mining requirements
- Unmatched durability with reliable mechanism & durable housing in Zinc alloy
- Operator comfort and control due to great ergotnomics even at high torque levels
- ""Never ending"" torque thanks to the 2-Jaw clutch
- Best 3/4" impact to target big bolts on Industrial Maintenance & Production explosive environments

CP6060 SASAB

# CP6060 SASAB

THE BEST SUPER INDUSTRIAL 3/4"

## FEATURES

- **Super Industrial 3/4" impact wrench**
- Reliable 2-jaw clutch
- Aluminum body & steel clutch housing
- Durable reverse valve & steel trigger
- Compact 3-part construction & easy maintenance
- Hole type socket retainer with o-Ring

## BENEFITS

- Best 3/4" impact to loosen big bolts on very demanding industries
- Operator comfort and control due to great ergotnomics even at high torque levels
- ""Never ending"" torque thanks to the 2-Jaw clutch
- Unmatched durability with reliable mechanism & durable housing
- Designed for Industrial Maintenance and Production applications

**CP6060 SASAB**

## CP6060 SASAR

*Same features as*
*CP6060 SASAB with ring type retainer*

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 ($m/s^2$) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP6060 SASAB | T024059 | 3/4" | 1,000 | 3,500 | 195-650 | 265-880 | 1,000 | 1,356 | 11.7 | 5.3 | 7.6 | 194 | 42.0 | 19.8 | 14.2 | 4.1 | 95 | 106 | 3/8 |
| CP6060 SASAR | T024058 | 3/4" | 1,000 | 3,500 | 195-650 | 265-880 | 1,000 | 1,356 | 11.9 | 5.4 | 7.6 | 194 | 42.0 | 19.8 | 14.2 | 4.1 | 95 | 106 | 3/8 |
| CP6060 ZASAB | T024064 | 3/4" | 1,000 | 3,500 | 195-650 | 265-880 | 1,000 | 1,356 | 11.7 | 5.3 | 7.6 | 194 | 42.0 | 19.8 | 14.2 | 4.1 | 95 | 106 | 3/8 |

*All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP6060 SASAK

1"

SUPER INDUSTRIAL

### The Most Compact & Lightweight Industrial 1"

**FEATURES**
- **Super Industrial lightweight 1" impact wrench**
- Reliable 2-jaw clutch
- Aluminum body & steel clutch housing
- Durable reverse & steel trigger
- Compact 3-part construction & easy maintenance
- Hole type socket retainer with O-Ring

**BENEFITS**
- Compact 1" to break big bolts on very demanding industries
- Operator comfort and control due to great ergotnomics even at high torque levels
- ""Never ending"" torque thanks to the 2-Jaw clutch
- Unmatched durability with Reliable mechanism & durable housing
- Ideal for Industrial Maintenance & Production applications

## CP6060 ZASAK

*Same features as CP6060 SASAK with zink housing for spark resistance*

EX

## CP894

1"

### Smooth operation & Robustness

**FEATURES**
- **1" pistol impact wrench with Dual retainer**
- DYNA-PACT (Pin clutch) mechanism in oil bath
- One-handed reverse button with 3 settings of power
- Adjustable side handle

**BENEFITS**
- Ideal tool for General Maintenance operations
- Clutch delivers smooth operation and great durability
- Side handle provides additional comfort

## CP6910-P24

1"

### Powerful, Durable & Comfortable

**FEATURES**
- **1" Industrial Pistol impact wrench**
- Oil Bath Pinless rocking dog clutch
- Durable Aluminum body & Rubber protective cover on clutch housing
- D-type side handle with Rubber grip
- Dual (hole & ring) type socket retainer
- Removable hole plate for suspension
- Metal trigger & reverse knob for longer durability
- 3-positions regulator & easy reverse

**BENEFITS**
- Ideal for a variety of heavy Industrial Maintenance applications
- Reliable & powerful oil bath Pinless Rocking Dog clutch
- Operator comfort with many ergotnomic features
- 3-part construction reducing downtime maintenance

CP6910-P24

See accessories on pages 30 to 34

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP6060 SASAK | T024060 | 1" | 1,000 | 3,500 | 195-650 | 265-880 | 1,000 | 1,356 | 11.9 | 5.4 | 7.6 | 194 | 42.0 | 19.8 | 14.2 | 4.1 | 95 | 106 | 3/8 |
| CP6060 ZASAK | T024063 | 1" | 1,000 | 3,500 | 195-650 | 265-880 | 1,000 | 1,356 | 11.9 | 5.4 | 7.6 | 194 | 42.0 | 19.8 | 14.2 | 4.1 | 95 | 106 | 3/8 |
| CP6910-P24 | 615 159 0070 | 1" | 650 | 5,000 | 370-1,550 | 500-2,100 | 1,920 | 2,600 | 22.5 | 10.2 | 11.4 | 290 | 40.2 | 19.0 | 8.9 | 2.5 | 97 | 108 | 1/2 |
| CP894 | T024743 | 1" | 720 | 4,100 | 100-1,200 | 136-1,627 | 1,700 | 2,305 | 25.0 | 11.3 | 11.8 | 298 | 45.0 | 21.2 | 8.3 | 2.7 | 100 | 111 | 1/2 |

*All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP0611P RLS

#5

SUPER INDUSTRIAL

THE BEST SUPER INDUSTRIAL WITH SPLINE #5

### FEATURES

- **Super industrial impact with spline #5**
- Reliable 2-jaw clutch
- Aluminum body & steel clutch housing
- Protective & Durable reverse
- Compact 3-part construction & easy maintenance
- 360° adjustable D-type side handle

### BENEFITS

- Best impact to target big bolts on very demanding industries thanks to Spline #5
- Spline #5: avoid loss of torque, reduce vibrations, increase durability of anvil
- Operator comfort and control thanks to perfect ergotnomic design even at VERY high torque
- "Never ending" Torque due to the 2-Jaw clutch
- Unmatched durability with reliable mechanism & durable housing
- Excellent for Heavy Industrial Maintenance Production applications

## CP0611P RS

1"

THE BEST SUPER INDUSTRIAL 1"

### FEATURES

- **Super Industrial 1" impact wrench**
- Reliable 2-jaw clutch
- Aluminum body & steel clutch housing
- Protective & Durable reverse
- Compact 3-part construction & easy maintenance
- Hole type socket retainer with o-Ring
- 360° adjustable D-type side handle

### BENEFITS

- Best 1" impact to targets tough bolts on very demanding industries
- Operator comfort and control thanks to great ergotnomics even at VERY high torque
- "Never ending" torque due to the 2-Jaw clutch
- Unmatched durability with reliable mechanism & durable housing
- Excellent for Heavy Industrial Maintenance and Production applications

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP0611P RLS | T025414 | #5 | 1,020 | 3,500 | 900-1,800 | 1,220-2,440 | 2,800 | 3,790 | 23.1 | 10.5 | 10.7 | 272 | 48.0 | 22.6 | 16.8 | 4.7 | 102 | 113 | 1/2 |
| CP0611P RS | T025413 or 615 159 0050 | 1" | 1,020 | 3,500 | 900-1,800 | 1,220-2,440 | 2,800 | 3,790 | 23.1 | 10.5 | 10.7 | 272 | 48.0 | 22.6 | 16.8 | 4.7 | 102 | 113 | 1/2 |

*All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP7780

1"

### Lightweight for General Maintenance

**FEATURES**
- **1" D-Handle impact wrench with Dual retainer (Hole + Ring)**
- Only 15 lbs (6,8kg) for one the best lightweight tool
- Integrated protective cover on the clutch housing
- Twin hammer mechanism in oil bath
- for durability
- Double stage trigger and dedicated lever for forward & reverse
- ergotnomic side handle with soft touch grip
- 4-position power setting for both directions and on both sides of the tool

**BENEFITS**
- Maximize operator comfort with a lightweight impact
- ergotnomic and intuitive handling
- High Power to Weight ratio for General Maintenance applications

## CP7782

1"

### High Torque & Comfort

**FEATURES**
- **1" D-handle impact wrench with dual retainer (Hole + Ring)**
- Pinless closed reinforced rocking dog impact mechanism
- ergotnomic side handle
- Integrated protective cover on the clutch housing
- Full teasing trigger
- Regulator with integrated forward/reverse with 3-position power settings in both directions

**BENEFITS**
- Great power for general maintenance applications
- Reinforced clutch mechanism
- Low vibration for a better operator confrot

## CP6920-D24

1"

### Powerful, Durable & Comfortable

**FEATURES**
- **1" Industrial D-Handle impact wrench with Dual (hole & ring) type socket retainer**
- Reliable oil bath pinless rocking dog clutch
- Durable Aluminum body & Rubber protective cover on clutch housing
- Motor with reninforced steel plates for unmatched durability
- Confortable D-type side handle with Rubber grip
- Removable hole plate for suspension
- Metal trigger & reverse knob for longer durability
- 4-positions regulator & easy reverse

**BENEFITS**
- Ideal for a variety of heavy Industrial Maintenance applications
- Reliable & powerful oil bath Pinless Rocking Dog clutch
- Operator comfort with many ergotnomic features
- 3-part construction for reducing downtime maintenance

CP6920-D24

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft. | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP6920-D24 | **615 159 0080** | 1" | 700 | 5,000 | 370-1,550 | 500-2,100 | 1,920 | 2,600 | 22.7 | 10.3 | 14.2 | 360 | 40.2 | 19.0 | 8.4 | 2.8 | 100 | 111 | 1/2 |
| CP7780 | **894 107 7800** | 1" | 790 | 5,000 | 260-1,220 | 350-1,650 | 1,550 | 2,100 | 15.0 | 6.8 | 13.2 | 335 | 49.8 | 23.4 | 15.5 | 5.9 | 94 | 105 | 1/2 |
| CP7782 | **894 107 7820** | 1" | 500 | 5,200 | 370-1475 | 500-2,000 | 1,920 | 2,600 | 22.2 | 10.1 | 14.7 | 370 | 40.7 | 19.2 | 7.8 | 1.8 | 100 | 111 | 1/2 |

*All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

# CP6110 PASED

1"

SUPER INDUSTRIAL

COMPACT, ERGONOMIC & VERSATILE INDUSTRIAL 1"

## CP6110 GASED

*Same features as CP6110 PASED with outside trigger*

### FEATURES

- **1" industrial impact wrench**
- Reliable Twin lobe clutch
- Robust Aluminum body & steel clutch housing
- 360° adjustable D-type side handle
- Steel inside trigger
- Hole-type socket retainer

### BENEFITS

- The best industrial 1" for VERY soft joints applications
- Operator comfort with adjustable side handle and smooth operations
- Reliable clutch & durable housing
- 3-part construction for easy maintenance
- Excellent in Industrial Maintenance & Production

CP0611 PASED

# CP0611 PASED

1"

THE "REFERENCE" IN 1": COMPACT, COMFORTABLE & EXTREMELY DURABLE

### FEATURES

- **Super Industrial 1" impact wrench**
- Reliable 2-jaw clutch with the highest Blows per Minutes
- Full Teasing (inside) trigger with durable reverse
- Durable aluminum body & indestructible steel clutch housing
- Compact 3-part construction & easy maintenance
- Hole type socket retainer with o-Ring
- 360° adjustable D-type side handle

### BENEFITS

- Best 1" impact to loosen big bolts on very demanding industries
- Operator comfort and control thanks to perfect ergotnomic design even at VERY high torque
- "Never ending" torque thanks to the 2-Jaw clutch
- Unmatched durability with reliable mechanism & durable housing
- Ideal for Heavy Industrial Maintenance and Production applications

SUPER INDUSTRIAL

**CP0611 PASED**

## CP0611 GASED

*Same features as CP0611 PASED with outside trigger*

## CP0611 HAZED

*Same features as CP0611 PASED with zinc housing for spark resistance*

EX

## CP0611 PASEL or GASEL

*Same features as CP0611 PASED or GASED with #5 Spline socket retainer.*

#5

*Benefits : avoid loss of torque, reduce vibrations, increase durability of anvil*

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP0611 GASED | T022580 | 1" | 1,020 | 3,500 | 900-1,800 | 1,220-2,440 | 2,800 | 3,790 | 22.5 | 10.2 | 12.5 | 318 | 48.0 | 22.6 | 16.1 | 4.5 | 97 | 108 | 1/2 |
| CP0611 GASEL | T022581 | #5 | 1,020 | 3,500 | 900-1,800 | 1,220-2,440 | 2,800 | 3,790 | 22.5 | 10.2 | 12.5 | 318 | 48.0 | 22.6 | 16.1 | 4.5 | 97 | 108 | 1/2 |
| CP0611 HAZED | T022582 | 1" | 1,020 | 3,500 | 900-1,800 | 1,220-2,440 | 2,800 | 3,790 | 22.5 | 10.2 | 12.5 | 318 | 48.0 | 22.6 | 16.1 | 4.5 | 97 | 108 | 1/2 |
| CP0611 PASED | T022578 | 1" | 1,020 | 3,500 | 900-1,800 | 1,220-2,440 | 2,800 | 3,790 | 22.5 | 10.2 | 12.5 | 318 | 48.0 | 22.6 | 16.1 | 4.5 | 97 | 108 | 1/2 |
| CP0611 PASEL | T022579 | #5 | 1,020 | 3,500 | 900-1,800 | 1,220-2,440 | 2,800 | 3,790 | 22.5 | 10.2 | 12.5 | 318 | 48.0 | 22.6 | 16.1 | 4.5 | 97 | 108 | 1/2 |
| CP6110 GASED | T024425 | 1" | 960 | 3,500 | 375-1,250 | 510-1,695 | 1,900 | 2,575 | 21.5 | 9.8 | 13.0 | 330 | 53.0 | 25.0 | 18.1 | 5.9 | 93 | 104 | 1/2 |
| CP6110 PASED | T025100 | 1" | 960 | 3,500 | 375-1,250 | 510-1,695 | 1,900 | 2,575 | 21.5 | 9.8 | 13.0 | 330 | 53.0 | 25.0 | 18.1 | 5.9 | 93 | 104 | 1/2 |

*All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP6120 PASED

1-½"

THE BEST SUPER INDUSTRIAL 1-1/2": COMPACT, COMFORTABLE & EXTREMELY DURABLE

### FEATURES

- **Super Industrial 1-1/2" impact wrench**
- Reliable 2-jaw clutch with the highest Blows per Minute
- Full Teasing (inside) trigger with durable reverse
- Durable aluminum body & indestructible steel clutch housing
- Compact 3-part construction & easy maintenance
- Hole type socket retainer with o-Ring
- 360° adjustable D-type side handle

### BENEFITS

- Best 1-1/2" impact to loosen very big bolts quickly and smoothly
- Operator comfort and control thanks to great ergonomics even at VERY high torque
- "Never ending" torque due to the 2-Jaw clutch
- Unmatched durability with Reliable mechanism & durable housing
- Excellent for very demanding industries such as Heavy Industrial Maintenance & Production applications

**CP6120 PASED**

### CP6120 GASED

*Same features as CP6120 PASED with outside trigger*

### CP6120 PASEL or GASEL

*Same features as CP6120 PASED or GASED with #5 Spline Drive*

#5

*Benefits : avoid loss of torque, reduce vibrations, increase durability of anvil.*

## CP6930-D35

1-½"

1-1/2" IMPACT FOR INDUSTRIAL MAINTENANCE

### FEATURES

- **1-1/2" industrial impact wrench with hole type socket retainer**
- Durable twin hammer clutch
- Durable aluminum body & clutch housing
- Reversible D-type side handle
- Internal trigger & 4-settings power regulator
- Adjustable exhaust

### BENEFITS

- Best gun to loosen very big bolts quickly and smoothly
- Operator comfort and control with reversible side handle
- Reliable twin hammer impact mechanism & durable housing
- Compact 3-part construction for easy maintenance

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP6120 GASED | T018237 | 1-1/2" | 960 | 3,000 | 600-2,000 | 815-2,710 | 3,500 | 4,740 | 33.9 | 15.4 | 14.8 | 375 | 60.0 | 28.3 | 21 | 6.6 | 102 | 113 | 1/2 |
| CP6120 GASEL | T017755 | #5 | 960 | 3,000 | 600-2,000 | 815-2,710 | 3,500 | 4,740 | 33.9 | 15.4 | 14.8 | 375 | 60.0 | 28.3 | 21 | 6.6 | 102 | 113 | 1/2 |
| CP6120 PASED | T018841 | 1-1/2" | 960 | 3,000 | 600-2,000 | 815-2,710 | 3,500 | 4,740 | 33.9 | 15.4 | 14.8 | 375 | 60.0 | 28.3 | 21 | 6.6 | 102 | 113 | 1/2 |
| CP6120 PASEL | T018235 | #5 | 960 | 3,000 | 600-2,000 | 815-2,710 | 3,500 | 4,740 | 33.9 | 15.4 | 14.8 | 375 | 60.0 | 28.3 | 21 | 6.6 | 102 | 113 | 1/2 |
| CP6930-D35 | 615 159 0390 | 1-1/2" | 850 | 4,300 | 445-1,950 | 600-2,650 | 2,875 | 3,900 | 31.6 | 14.4 | 17.3 | 440 | 64.0 | 30.0 | 16.1 | 7.2 | 100 | 111 | 1/2 |

*All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)*

*Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

## CP0614 PALED

1-½"

SUPER INDUSTRIAL

### CP0614 GALED

*Same features as CP0614 PALED with outside trigger*

EXTREME POWER & LIGHT WEIGHT IN 1-1/2"

**FEATURES**
- **1-1/2" industrial impact wrench**
- Reliable 2-jaw clutch
- Body & clutch aluminum housing
- Bar type side handle
- Steel inside trigger
- Hole type socket retainer with O-ring

**BENEFITS**
- Designed for Industrial Maintenance & Production
- Heavy performance with 2-jaw mechanism
- Operator comfort with light weight
- Easy control even at high torque levels
- Reliable impact mechanism
- 3-part construction & easy to maintain

## CP6130-T70

1-½"

POWERFUL, DURABLE & SMOOTH 1-1/2" T-HANDLE

SUPER INDUSTRIAL

**FEATURES**
- **1-1/2" Super Duty T-Handle**
- Reliable Double Rocking Dog clutch
- Durable aluminum body & clutch housing
- 5-positions regulator, progressive trigger & Easy reverse
- Removable dead handle and confortable Top handles
- Suspension hole for easy hoist/balancer hooking

**BENEFITS**
- Incredible breaking torque (up to M56) for Industrial Maintenance & Production applications
- Extreme durability: Resitant parts, reliable mechanisms & robust housing
- Operator comfort: smooth control, low vibrations & limited noise
- Compact 3-parts construction for easy maintenance

## CP6240-T120

2-½"

POWERFUL, DURABLE & SMOOTH 2-1/2" T-HANDLE

SUPER INDUSTRIAL

**FEATURES**
- **2-1/2" Super Duty T-Handle**
- Reliable Double Rocking Dog clutch
- Durable aluminum body & clutch housing
- 6-positions regulator, progressive trigger & Easy reverse
- Removable dead handle and confortable Top handles
- Suspension hole for easy hoist/balancer hooking

**BENEFITS**
- Incredible breaking torque (up to M72) for Industrial Maintenance & Production applications
- Extreme durability: Resitant parts, reliable mechanisms & robust housing
- Operator comfort: smooth control, low levels of vibration & limited noise
- Compact 3-parts construction for easy maintenance

**See accessories on pages 30 to 34**

| MODEL | PART NUMBER | DRIVE | BLOWS PER MIN | FREE SPEED | WORKING TORQUE (FW) | | MAX TORQUE (REV) | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (m/s²) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | in. | bpm | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | a | K | ISO 15744 - dB(A) | | in. |
| CP0614 GALED | T020021 | 1-1/2" | 500 | 2,500 | 1,200-2,400 | 1,620-3,250 | 4,000 | 5,420 | 31.5 | 14.3 | 16.4 | 417 | 58.0 | 27.4 | 18.8 | 4.0 | 97 | 108 | 1/2 |
| CP0614 PALED | T020022 | 1-1/2" | 500 | 2,500 | 1,200-2,400 | 1,620-3,250 | 4,000 | 5,420 | 31.5 | 14.3 | 16.4 | 417 | 58.0 | 27.4 | 18.8 | 4.0 | 97 | 108 | 1/2 |
| CP6130-T70 | 615 159 0010 | 1-1/2" | 180 | 4,000 | 2,430-5,240 | 3,300-7,100 | 9,220 | 12,500 | 72.6 | 33.0 | 19.7 | 500 | 67.3 | 31.8 | 4.7 | 1.7 | 104 | 115 | 1 |
| CP6240-T120 | 615 159 0020 | 2-1/2" | 120 | 4,000 | 3,760-9,150 | 5,100-12,400 | 18,440 | 25,000 | 132.0 | 60.0 | 24.1 | 610 | 74.9 | 35.3 | 4.5 | 1.5 | 107 | 118 | 1 |

*All models: Hose int. 1/2" (13mm) or 1" (25mm) - @90 PSI (@6.3 Bar)* *Listed specifications are for reference only. Please check documents in each tool or on www.cp.com*

# Kits

## IMPACT KITS

### CP734H Kit /
### CP734H Metric Kit

**Part No. T025163 / T025164**
Kits include:
**- (1) CP734H - 1/2" Impact**
- (5) Imperial Sockets (1/2", 5/8", 3/4", 7/8" & 15/16")
  or
- (5) Metric Sockets (14, 16, 17, 19 & 22mm)

### CP772H Kit /
### CP772H Metric Kit

**Part No. T025171 / T025162**
Kits include:
**- (1) CP772H - 3/4" Impact**
- (4) Imperial Sockets (15/16", 1", 1-1/16" & 1-1/8")
  or
- (4) Metric Sockets (24, 27, 30 & 32mm)

### CP749 Kit /
### CP749 Metric Kit

**Part No. T025193 / T025194**
Kits include:
**- (1) CP749 1/2" Impact wrench**
- (5) Imperial Sockets (1/2", 5/8", 3/4", 7/8" & 5/16" AF)
  or
- (5) Metric Sockets (14, 16, 17, 19 & 22mm AF)
- (1) Bottle of air tool oil

## INCLUDED ACCESSORIES

| DESCRIPTION | CP8222/32/42 | CP8252 | CP8272 | CP6060 | CP0611 | CP6910/20 | CP6110 | CP6120 | CP0614 |
|---|---|---|---|---|---|---|---|---|---|
| Retainer ring with steel insert | - | - | - | C-155472 | C-134692 | - | C-134692 | C-134695 | C-134695 |
| Support handle | - | - | - | - | CA048548 | 205 053 1433 | C145892 | CA048548 | C039428 |
| Band-Handle | - | - | - | - | C116388 | - | C116388 | C119061 | - |
| Screw-Allen Cap | - | - | - | - | C064806 | - | C127944 | P073025 | - |
| Suspension Hook | 205 055 6993 | 205 055 7153 | 205 055 9893 | - | - | 854 016 6788 | - | - | - |
| Protective Cover | 205 053 3633 | 205 053 3643 | 205 053 3653 | - | - | 205 055 4943 | - | - | - |

## OPTIONAL ACCESSORIES

### RETAINER RING WITH STEEL INSERT

One piece retainer made with polyurethane and a steel inserts.
Better safety than traditional retainers

| SQUARE DRIVE | INSIDE DIAMETER OF RET RING | | PART NO. |
|---|---|---|---|
| | in. | mm | |
| 3/4" | 1-1/4 | 31 | C-155467 |
| 3/4" | 1-7/16 | 36 | C-155468 |
| 3/4" | 1-5/8 | 41 | C-134690 |
| 3/4" | 1-3/4 | 44 | C-134691 |
| 3/4" | 2 | 51 | C-155585 |
| 3/4" | 2-1/4 | 57 | C-155486 |
| 1" | 1-3/4 | 44 | C-155470 |
| 1" | 2 | 51 | C-155471 |
| 1" | 2-1/8 | 54 | C-155472 |
| 1" | 2-1/4 | 57 | C-134692 |
| 1" | 2-1/2 | 63 | C-155473 |
| 1-1/2" | 2-7/8 | 73 | C-134693 |
| 1-1/2" | 3-3/8 | 86 | C-134694 |
| 1-1/2" | 3-7/8 | 98 | C-134695 |
| 1-1/2" | 4-3/8 | 111 | C-134696 |

### 1/2" SQUARE DRIVE

| MODEL | DESCRIPTION | PART NO. |
|---|---|---|
| CP6500 | 1/2" square drive with 2" (50mm) extension friction ring retainer | CA148629 |

| MODEL | DESCRIPTION | PART NO. |
|---|---|---|
| CP6540 RSS | 7/16" Quick change Hex. Drive | CA148629 |

### LUBRICATION

| OIL PROTECTO-LUBE FOR MOTOR | PART NO. |
|---|---|
| 4oz. (0.12 l) - Air Tool Oil | CA149661 |
| 20.8oz (0.591 l) - Air Tool Oil | CA000046 |
| 1 Gal (3.8l) - Airoilene oil | P089507 |

| GREASE PNEU-LUBE FOR CLUTCH | PART NO. |
|---|---|
| Pneu-Lube 100GM Tube | 894 015 8455 |
| Pneu-Lube Cartridge | 894 015 8456 |
| Pneu-Lube 7# Can | 894 015 8457 |
| Grease Gun + 2 Nozzles | C098689 |

### GLOVES

| DESCRIPTION | PART NUMBER | |
|---|---|---|
| **Impact Gloves:** Medium | 894 017 1574 | NEW |
| **Impact Gloves:** Large | 894 015 8618 | |
| **Impact Gloves:** X Large | 894 015 8619 | |
| **Impact Gloves:** XX Large | 894 017 1573 | NEW |

Certified EN 388 (Protection against mechanical risks), the CP gloves are the ideal option to protect the operator's hands in harsh environments, such as mining and construction applications

### MAGNETIC TOOL HOLDER

| MODEL | PART NO. |
|---|---|
| CP9841 | 894 016 6664 |

*Maximum 5,5 lbs (2.5 kg)*

### PROTECTOR COVERS

| TOOL | PART NUMBER |
|---|---|
| CP724, CP726 | CA146522 |
| CP749 | CA155537 |
| CP734H | CA129405 |
| CP7729, CP7739 | 894 016 8830 |
| CP7763 | 894 016 3076 |
| CP7773 | 894 016 7498 |
| CP7759Q | 894 016 8963 |
| CP7748 | 894 016 9916 |
| CP7769, CP7779 | 894 016 9917 |
| CP7780 | 894 016 9520 |
| CP7782 | 894 016 3099 |
| CP8222-P/-R | 205 053 3633 |
| CP8232-QC | 205 053 3633 |
| CP8242-P/-R | 205 053 3633 |
| CP8252-P/-R | 205 053 3643 |
| CP8272-P/-D | 205 053 3653 |
| CP828 (T) | CA133961 |
| CP825 (T) | CP140128 |
| CP7830Q (HQ) | CA147993 |

### BALANCERS SELECTION

| BALANCER TYPE | MODEL | LOAD RANGE | | STROKE | | NET WEIGHT | | PART NUMBER | CP TOOLS |
|---|---|---|---|---|---|---|---|---|---|
| | | lb. | kg | ft | mm | lb. | kg | | |
| Spring retractor | CP9912 | 2.2-4.4 | 1.0-2.0 | 5.2 | 1,600 | 1.3 | 0.6 | 894 109 9120 | CP8222/8242 |
| | CP9913 | 4.4-6.6 | 2.0-3.0 | 5.2 | 1,600 | 1.5 | 0.7 | 894 109 9130 | CP8252 |
| | CP9936 | 4.4-8.8 | 2.0-4.0 | 8.2 | 2,500 | 6.4 | 2.9 | 894 109 9360 | CP8272 |
| Reaction free | CP9956 | 22-30.9 | 10-14 | 6.5 | 2,000 | 12.1 | 5.5 | 894 109 9560 | CP6910/6920 |
| | CP9957 | 31-39.7 | 14-18 | 6.5 | 2,000 | 14.3 | 6.5 | 894 109 9570 | CP6930 |
| | CP9966 | 77-99 | 35-45 | 6.5 | 2,000 | 27.3 | 12.4 | 894 109 9660 | CP6130 |
| | CP9968 | 121-143 | 55-75 | 6.5 | 2,000 | 30.0 | 13.6 | 894 109 9680 | CP6240 |

Spring retractor

Reaction free

## SET - 1/4″ SQUARE DRIVE IMPACT SOCKETS

| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS |
|---|---|---|---|---|
| **METRIC** (mm) | | | | |
| SS2114 | **894 016 4436** | STANDARD | 14 | 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15 mm |
| SS2114D | **894 016 4437** | DEEP | 14 | 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15 mm |
| SS2112G | **894 016 4439** | MAGNETIC | 12 | 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15 mm |
| SS2112DG | **894 016 4440** | DEEP MAGNETIC | 12 | 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15 mm |
| **SAE** (in) | | | | |
| SS2010 | **894 016 4441** | STANDARD | 10 | 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2" & 9/16" |
| SS2010E | **894 016 4442** | DEEP | 10 | 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2" & 9/16" |
| SS206U | **894 016 4443** | UNIVERSAL | 6 | 1/4", 5/16", 3/8", 7/16", 1/2" & 9/16" |
| SS209G | **894 016 4444** | MAGNETIC | 9 | 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16" & 1/2" |
| SS209DG | **894 016 4445** | DEEP MAGNETIC | 9 | 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16" & 1/2" |

## SET - 3/8″ SQUARE DRIVE IMPACT SOCKETS

| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS |
|---|---|---|---|---|
| **METRIC** (mm) | | | | |
| SS3113 | **894 016 4446** | STANDARD | 13 | 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19 mm |
| SS3113D | **894 016 4447** | DEEP | 13 | 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19 mm |
| SS3110U | **894 016 4448** | UNIVERSAL | 10 | 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19 mm |
| SS3110DU | **894 016 4449** | DEEP UNIVERSAL | 10 | 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm |
| SS3113G | **894 016 4450** | MAGNETIC | 13 | 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19 mm |
| SS3113DG | **894 016 4451** | DEEP MAGNETIC | 13 | 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19 mm |
| **SAE** (in) | | | | |
| SS3012 | **894 016 4452** | STANDARD | 12 | 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16" & 1" |
| SS3012D | **894 016 4453** | DEEP | 12 | 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16" & 1" |
| SS3012U | **894 016 4454** | UNIVERSAL | 12 | 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16" & 1" |
| SS3012DU | **894 016 4455** | DEEP UNIVERSAL | 12 | 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16" & 1" |
| SS309G | **894 016 4456** | MAGNETIC | 9 | 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" & 3/4" |
| SS309DG | **894 016 4457** | DEEP MAGNETIC | 9 | 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" & 3/4" |

## SET - 1/2″ SQUARE DRIVE IMPACT SOCKETS

| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS |
|---|---|---|---|---|
| **METRIC** (mm) | | | | |
| SS4114 | **894 016 4458** | STANDARD | 14 | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 & 27 mm |
| SS4114D | **894 016 4459** | DEEP | 14 | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 & 27 mm |
| SS4113U | **894 016 4460** | UNIVERSAL | 13 | 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23 & 24 mm |
| SS4113DU | **894 016 4461** | DEEP UNIVERSAL | 13 | 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23 & 24 mm |
| SS4112G | **894 016 4462** | MAGNETIC | 12 | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20 & 21 mm |
| SS4112DG | **894 016 4463** | DEEP MAGNETIC | 12 | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20 & 21 mm |
| SS413DTW | **894 016 6760** | THIN WALL | 3 | 17, 19 & 21 mm |
| **SAE** (in) | | | | |
| SS4013 | **894 016 4465** | STANDARD | 13 | 7/16", 1/2", 9/16, 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8" & 1-1/4" |
| SS4013D | **894 016 4466** | DEEP | 13 | 7/16", 1/2", 9/16, 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8" & 1-1/4" |
| SS4014U | **894 016 4467** | UNIVERSAL | 14 | 7/16", 1/2", 9/16, 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16" & 1-1/4" |
| SS4014DU | **894 016 4468** | DEEP UNIVERSAL | 14 | 7/16", 1/2", 9/16, 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16" & 1-1/4" |
| SS4011G | **894 016 4469** | MAGNETIC | 11 | 3/8", 7/16", 1/2", 9/16, 5/8", 11/16", 3/4", 13/16", 7/8", 15/16" & 1" |
| SS4011DG | **894 016 4470** | DEEP MAGNETIC | 11 | 3/8", 7/16", 1/2", 9/16, 5/8", 11/16", 3/4", 13/16", 7/8", 15/16" & 1" |

## SET - 3/4″ SQUARE DRIVE IMPACT SOCKETS

| MODEL | PART NUMBER. | TYPE | NO. OF PIECES | DIMENSIONS |
|---|---|---|---|---|
| **METRIC** (mm) | | | | |
| SS618 | **894 016 4472** | STANDARD | 8 | 26, 27, 29, 30, 32, 35, 36 & 38 mm |
| SS618D | **894 016 4473** | DEEP | 8 | 26, 27, 29, 30, 32, 35, 36 & 38 mm |
| **SAE** (in) | | | | |
| SS6008D | **894 016 7073** | DEEP | 8 | 1", 1-1/16", 1-1/8", 1-1/4", 1-5/16", 1-3/8", 1-7/16" & 1-1/2" |
| SS6014D | **894 016 4475** | DEEP | 14 | 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4", 1-5/16", 1-3/8", 1-7/16", 1-1/2" & 1-5/8" |

## SET - 1" SQUARE DRIVE IMPACT SOCKETS

| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS |
|---|---|---|---|---|
| **METRIC** (mm) | | | | |
| SS818 | **894 016 4476** | STANDARD | 8 | 27, 30, 32, 33, 35, 36, 38 & 41 mm |
| SS814D | **894 016 6016** | DEEP | 4 | 27, 32, 33 & 36 mm |
| SS818D | **894 016 4477** | DEEP | 8 | 27, 30, 32, 33, 35, 36, 38 & 41 mm |
| **SAE** (in) | | | | |
| SS808 | **894 016 4478** | STANDARD | 8 | 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4" & 1-1/2" |
| SS808D | **894 016 4479** | DEEP | 8 | 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4" & 1-1/2" |

## 1-1/2" IMPACT SOCKETS - SINGLE PIECES

| MODEL | DESCRIPTION | PART NO. |
|---|---|---|
| S1041M | 1-1/2" DR STD Impact Socket 41mm | **894 016 9348** |
| S1046M | 1-1/2" DR STD Impact Socket 46mm | **894 016 9349** |
| S1050M | 1-1/2" DR STD Impact Socket 50mm | **894 016 9350** |
| S1055M | 1-1/2" DR STD Impact Socket 55mm | **894 016 9351** |
| S1060M | 1-1/2" DR STD Impact Socket 60mm | **894 016 9352** |
| S1065M | 1-1/2" DR STD Impact Socket 65mm | **894 016 9353** |
| S1070M | 1-1/2" DR STD Impact Socket 70mm | **894 016 9354** |
| S1075M | 1-1/2" DR STD Impact Socket 75mm | **894 016 9355** |
| S1080M | 1-1/2" DR STD Impact Socket 80mm | **894 016 9356** |
| S1085M | 1-1/2" DR STD Impact Socket 85mm | **894 016 9357** |
| S1090M | 1-1/2" DR STD Impact Socket 90mm | **894 016 9358** |
| S1080MD | 1-1/2" DR Deep Impact Socket 80mm | **894 016 9359** |

*For futher information about the individual sizes, adapters and extensions see the Impact Sockets catalog available from www.cp.com/literature*

# Bolting

## DIMENSIONS

### PISTOL SHAPE

| MODEL | DIMENSIONS | | | | | |
|---|---|---|---|---|---|---|
| | L | | H | | SIDE TO CENTER - A | |
| | in. | mm | in. | mm | in. | mm |
| CP0611P ... | 10.7 | 272 | 10.7 | 273 | 1.81 | 46 |
| CP6300 RSR | 6.0 | 152 | 7.7 | 197 | 1.26 | 32 |
| CP6031 ... | 5.6 | 143 | 6.6 | 168 | 0.75 | 19 |
| CP6041 ... | 6.8 | 173 | 8.0 | 204 | 1.10 | 28 |
| CP6500 RS | 7.0 | 178 | 8.1 | 205 | 1.26 | 32 |
| CP6540 ... | 7.4 | 188 | 8.1 | 205 | 1.26 | 32 |
| CP6060 ... | 7.6 | 194 | 9.8 | 250 | 1.46 | 37 |
| CP6910-P24 | 11.4 | 290 | 10.8 | 275 | 3.82 | 97 |
| CP719 | 4.5 | 116 | 6.8 | 172 | 0.87 | 22 |
| CP721 | 6.6 | 167 | 6.1 | 155 | 0.91 | 23 |
| CP724/726 | 6 | 152 | 7.5 | 190 | 0.95 | 24 |
| CP734H | 7.5 | 191 | 7.9 | 200 | 1.22 | 31 |
| CP749 | 7 | 178 | 8.1 | 205 | 1.30 | 33 |
| CP772H | 9.6 | 245 | 8.7 | 220 | 3.03 | 77 |
| CP7722 | 6.3 | 160 | 3.5 | 90 | 1.81 | 46 |
| CP7729/39 | 6.4 | 163 | 7.2 | 184 | 1.03 | 26 |
| CP7748 | 7.6 | 195 | 7.4 | 188 | 1.33 | 35 |
| CP7759Q | 7.4 | 187 | 7.4 | 188 | 1.42 | 36 |
| CP7763/73 | 8.8 | 224 | 9.2 | 234 | 1.77 | 45 |
| CP7769/79 | 8.4 | 214 | 8.7 | 221 | 1.54 | 39 |
| CP8222/32/42 | 7 | 178 | 7.3 | 185 | 1.18 | 30 |
| CP8252-P/-R | 7.9 | 200 | 7.9 | 200 | 1.38 | 35 |
| CP8272-D/-P | 9.1 | 230 | 8.3 | 210 | 1.57 | 40 |
| CP894 | 11.8 | 300 | 11.8 | 300 | 1.10 | 28 |
| CP9541/42 | 6.6 | 168 | 7.2 | 184 | 1.18 | 30 |
| CP9561 | 8.5 | 216 | 9.2 | 235 | 1.53 | 39 |

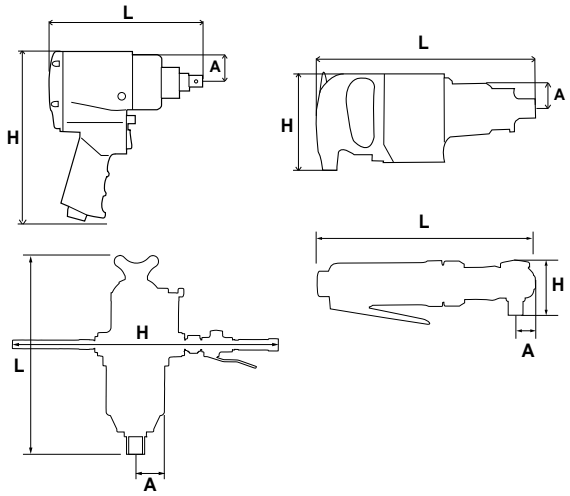


### D-HANDLE & T-HANDLE

| MODEL | DIMENSIONS | | | | | |
|---|---|---|---|---|---|---|
| | L | | H | | SIDE TO CENTER - A | |
| | in. | mm | in. | mm | in. | mm |
| CP0610 ... | 13.5 | 343 | 6.4 | 162 | 2.13 | 54 |
| CP0611 ... | 12.5 | 318 | 6.2 | 158 | 1.81 | 46 |
| CP0614 ... | 16.4 | 417 | 6.5 | 165 | 2.36 | 60 |
| CP6110 ... | 13.0 | 330 | 6.3 | 160 | 1.61 | 44 |
| CP6120 ... | 14.8 | 375 | 6.5 | 165 | 2.12 | 54 |
| CP6130-T70 | 19.7 | 500 | 33.5 | 850 | 3.14 | 80 |
| CP6240-T120 | 24.1 | 610 | 37.4 | 950 | 3.54 | 90 |
| CP6920-P24 | 14.2 | 360 | 7.9 | 200 | 3.86 | 97 |
| CP6930 | 16.3 | 415 | 9.25 | 235 | 2.56 | 65 |
| CP7780 | 13.2 | 335 | 6.7 | 171 | 1.97 | 50 |
| CP7782 | 14.7 | 370 | 6.7 | 171 | 2.60 | 66 |

### TUNE-UP KITS & REPAIR KITS

| MODEL | TUNE-UP KIT | REPAIR KIT |
|---|---|---|
| CP0611 series | C115811 | - |
| CP6041 | C44450 | C144448 |
| CP6060 | C137568 | C148005 |
| CP6110 | C137947 | - |
| CP6130-T70 | 894 017 1028 | |
| CP6240-T120 | 894 017 1046 | |
| CP6300 | C157304 | C157305 |
| CP6500RS | 894 015 8638 | 894 015 8639 |
| CP6500RSR | 894 015 8638 | 894 015 8640 |
| CP6540 | 894 015 8638 | 894 015 8642 |
| CP6910-P24 | 205 052 0693 | - |
| CP6920-D24 | 205 052 0713 | - |
| CP719 | CA157285 | CA157286 |
| CP721 | CA118880 | - |
| CP724H | CA155218 | CA155310 |
| CP726H | CA155309 | CA155311 |
| CP734H | CA147716 | CA147717 |
| CP749 | 894 015 8635 | 894 015 8636 |
| CP772H | CA149746 | CA149747 |
| CP7722 | 894 016 4482 | - |
| CP7729 | 894 016 8742 | - |

| MODEL | TUNE-UP KIT | REPAIR KIT |
|---|---|---|
| CP7739 | 894 016 8743 | - |
| CP7748 | 894 016 9810 | - |
| CP7759Q | 894 016 8447 | - |
| CP7763 | 894 016 2925 | 894 016 2927 |
| CP7769/79 | 894 016 9895 | - |
| CP7773 | 894 016 2926 | 894 016 2929 |
| CP7780 | 894 016 9518 | - |
| CP7782 | 894 016 9847 | - |
| CP894 | CA149855 | - |
| CP8222-P/-R | 894 055 7013 | 205 052 1393 |
| CP8232-QC | 894 055 7013 | - |
| CP8242-P/-R | 205 055 7013 | 205 052 1403 |
| CP8252-P/-R | 205 055 7163 | 205 052 1423 |
| CP8272-P/-D | 205 055 7343 | 205 052 4713 |
| CP9541 | C137164 | C137478 |
| CP9561 | C137569 | - |
| CP825T | CA155091 | CA155093 |
| CP828 | CA155086 | CA155084 |
| CP828H | CA155086 | CA155085 |
| CP7830HQ | 894 016 2552 | 894 015 8614 |
| CP7830Q | 894 016 2552 | 894 015 8613 |