


NY DZUS® Q-Latch Quarter-Turn Fasteners

Assembly





331



Latched

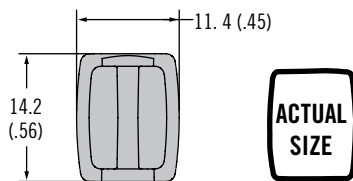

Unlatched

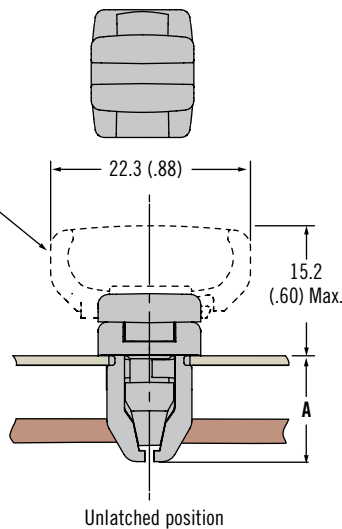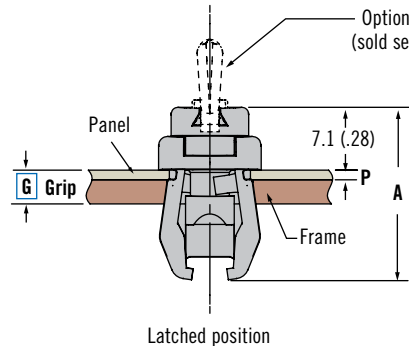

G	Grip Range		P Max.	A
	Min.	Max.		
1	1.50 (.059)	3.76 (.148)	1.0 (.042)	12.7 (.50)
2	1.93 (.076)	4.19 (.165)	1.5 (.057)	12.95 (.51)
3	3.00 (.118)	5.26 (.207)	2.5 (.098)	13.97 (.55)
4	4.62 (.182)	6.88 (.271)	4.1 (.162)	15.75 (.62)

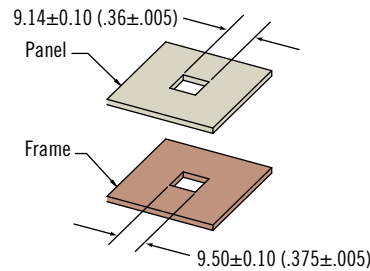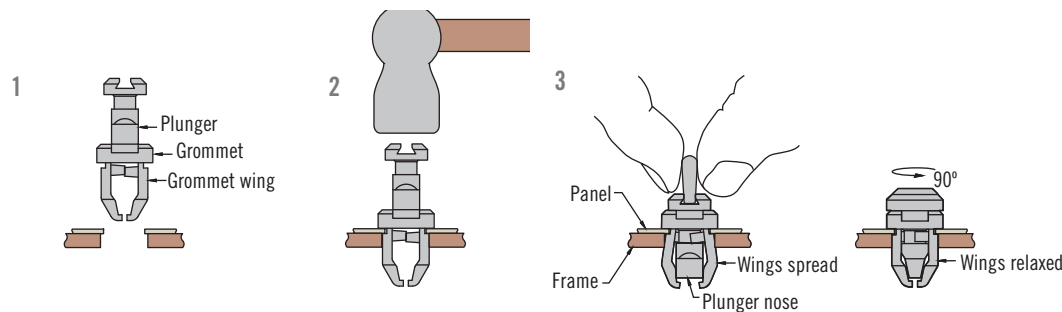

- Surface install
- Panel mounted assembly

Material and Finish

Acetal copolymer resin, black

NY Q-latch Installation notes

1. Insert assembly into outer panel.
2. Strike head of assembly to captivate assembly into outer panel.
3. Turn stud 90 degree to latch and unlatch.
4. Slide wing into slot

Part Number Selection

Latch assembly shipped as one piece

Wing must be ordered separately

Assembly

Optional Wing (order separately)



G Grip range

- 1 1.50 - 3.76 (.059 - .148)
- 2 1.93 - 4.19 (.076 - .165)
- 3 3.00 - 5.26 (.118 - .207)
- 4 4.62 - 6.88 (.182 - .271)

F Finish

- 10 Polycarbonate, white
- 20 Polycarbonate, black
- 30 Polysulfone, black
- 31 Polysulfone, white