

southco
CONNECT · CREATE · INNOVATE

- Flammability rating: UL94-V0
CompactPCI is a registered trademark of PICMG® - PCI Industrial Computer Manufacturers Group, Inc.




Technical drawing of the rear view of the handle assembly. Dimensions are provided in inches and millimeters (in parentheses). Key dimensions include:



- Overall width: 36 (1.4) Max.
- Distance from left edge to microswitch location lugs: 2.7 ± 0.1 (.11 ± .005)
- Microswitch location lugs: M 2.5 x 0.45
- Microswitch hole diameter: Ø 3 (.12)
- Distance from microswitch hole to right edge: 8.6 (.34)
- Distance from microswitch hole to bottom edge: 16.8 (.66)
- Distance from microswitch hole to bottom edge (alternative dimension): 8.55 (.337)
- Distance from microswitch hole to bottom edge (alternative dimension): 7.6 (.3)
- Distance from microswitch hole to bottom edge (alternative dimension): 22.75 (.896)
- Microswitch hole diameter (alternative dimension): Ø 3 (.12)
- Microswitch hole diameter (alternative dimension): Ø 2 (.08)

Part Number
P7-1-991-10


Figure 10 consists of two side-by-side cross-sectional diagrams of a cutting tool. The left diagram shows a tool with a 35-degree angle and a height of 8.8 (0.35). The right diagram shows a tool with a height of 2.5 (0.1).

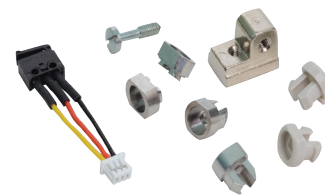




Faceplate Preparation 6U and 9U

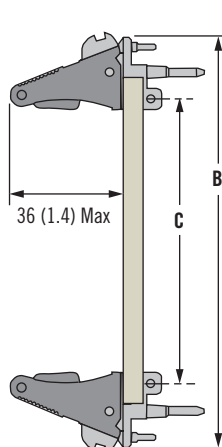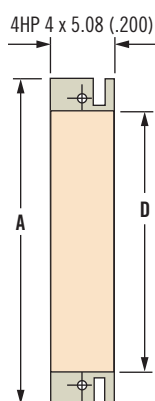

Area to be kept clear for front mounted components

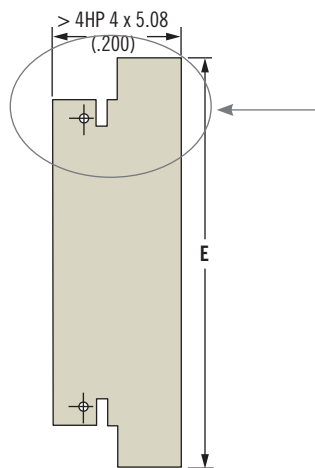

3U

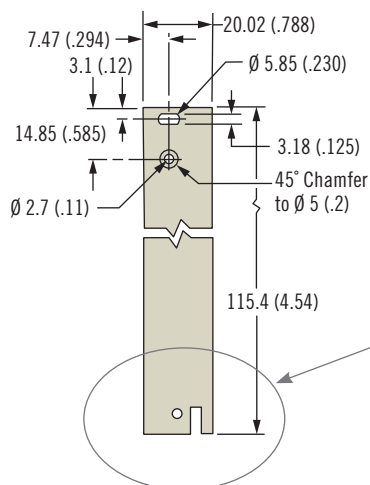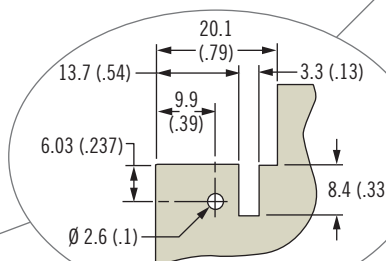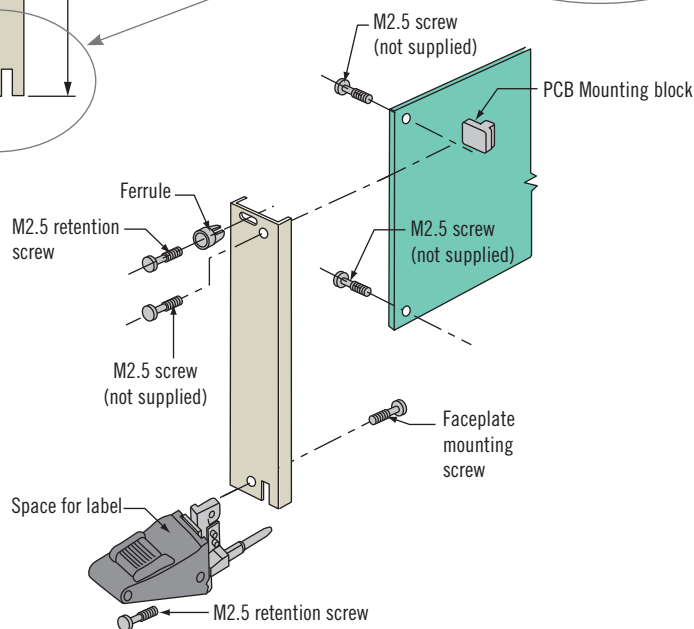

Style	A	B	C	D	E
6U	235.4 (9.27)	255.85 (10.073)	222.25 (8.750)	214.65 (8.451)	262.05 (10.317)
9U	368.75 (14.518)	389.2 (15.323)	355.6 (14.00)	348 (13.701)	395.4 (15.567)

Microswitch assembly:

Attaches to ejector, allows for hot swap

Part number: P7-0-46720



M2.5 Retention screw:

Used with ferrules and ejectors
Material and finish: Steel, plated

Part number: P7-0-45297



3U Hardware

Captivates M2.5 screw on faceplate

Snap-in ferrule:

Faceplate thickness

1.6 - 2.5 (.063 - .098)

Material and finish: ABS

Part number: P7-0-45227



Press-in ferrule:

Faceplate thickness

1.5 - 2.4 (.059 - .094)

Material and finish: Steel, plated

Part number: P7-0-45302



Press-in ferrule flush:

Minimum panel thickness 0.9 (.035)

Material and finish: Steel, plated

Part number: P7-0-45244



PCB Mounting block:

Used to mount PCB in place of ejector

Material and finish: Zinc alloy, plated

Part number: P7-0-45234

