

R2 Draw Latch

Concealed · Tab Mount

- **High tensile load**
- **Adjustable pull-up**
- **Suited for thin panels**

Material and Finish

Steel, zinc plated

Performance Details

Average ultimate tensile load:
6200 N (1400 lbf)

Average ultimate shear load:
8900 N (2000 lbf)

Installation Notes

Install assembly with M5 (No. 10) screws (not supplied)

Accessories

Actuation tool
Part number: 29-0059-02

Latch

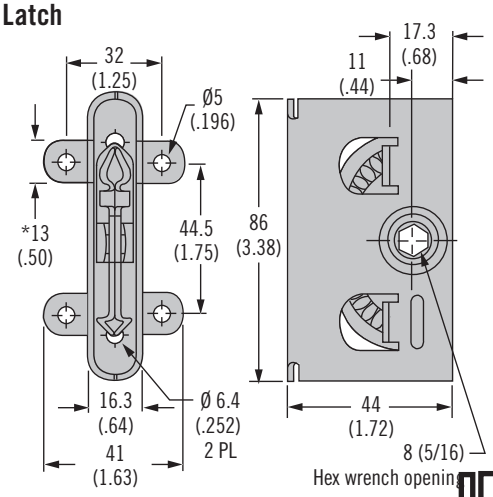

Receptacle

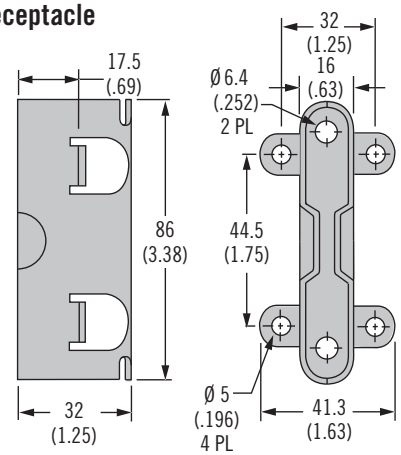

* Typical on latch and receptacle

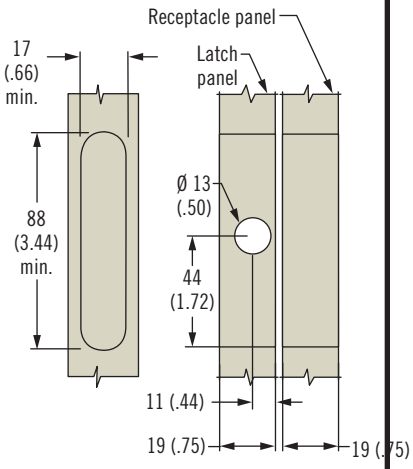

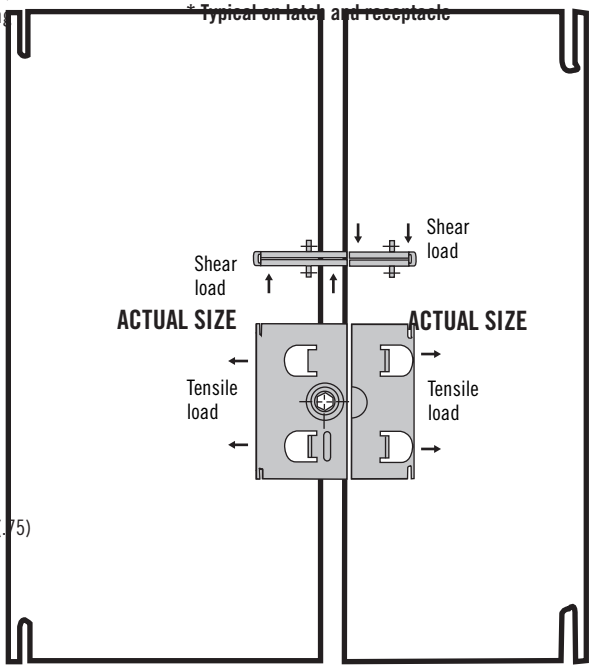

Accessories

Actuation Tool



Part Number	
Latch	R2-0259-02
Receptacle	R2-0257-02

R2 Draw Latch
Concealed · Tab Mount

Latch

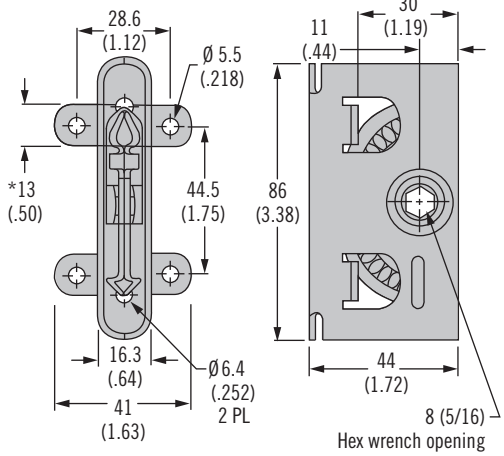

Receptacle

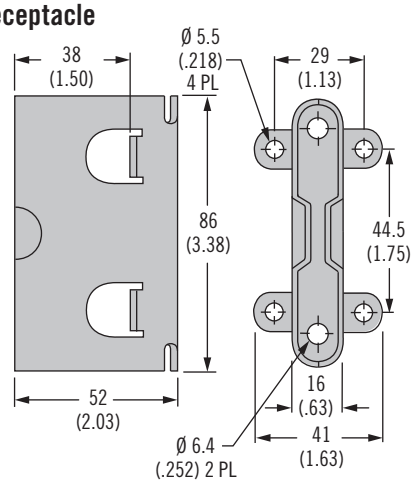

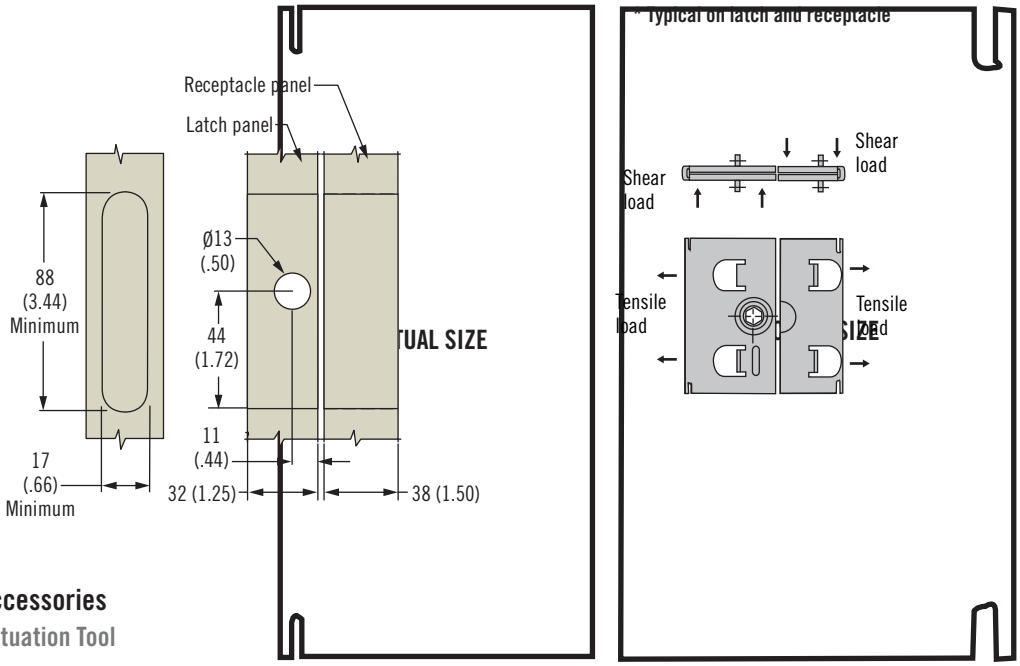

Accessories

Actuation Tool



Part Number	
Latch	R2-0169-02
Receptacle	R2-0160-02

- **High tensile load**
- **Adjustable pull-up**
- **Suited for thick panels**

Material and Finish

Steel, zinc plated

Performance details

Average ultimate tensile load: 6200 N (1400 lbf)

Average ultimate shear load: 8900N (2000 lbf)

Installation Notes

Install assembly with Ø 5 (.205) rivets or M5 (No. 10) screws (not supplied)

Accessories

Actuation Tool
Part number: 29-0059-02

R2 Draw Latch

Concealed · Mortise

southco
CONNECT · CREATE · INNOVATE

- **High tensile load**
- **Adjustable pull-up**
- **Suited for mortise or side mount installation**

Material and Finish

Steel, zinc plated

Performance Details

Average ultimate tensile load: 6200 N (1400 lbf)

Average ultimate shear load: 8900 N (2000 lbf)

Installation Notes

Install assembly with Ø 6 (1/4) rivets or M6 (1/4) screws (not supplied).
A 1.6 (.06) gap should be maintained between latch and receptacle.

Accessories

Actuation tool
Part number: 29-0059-02

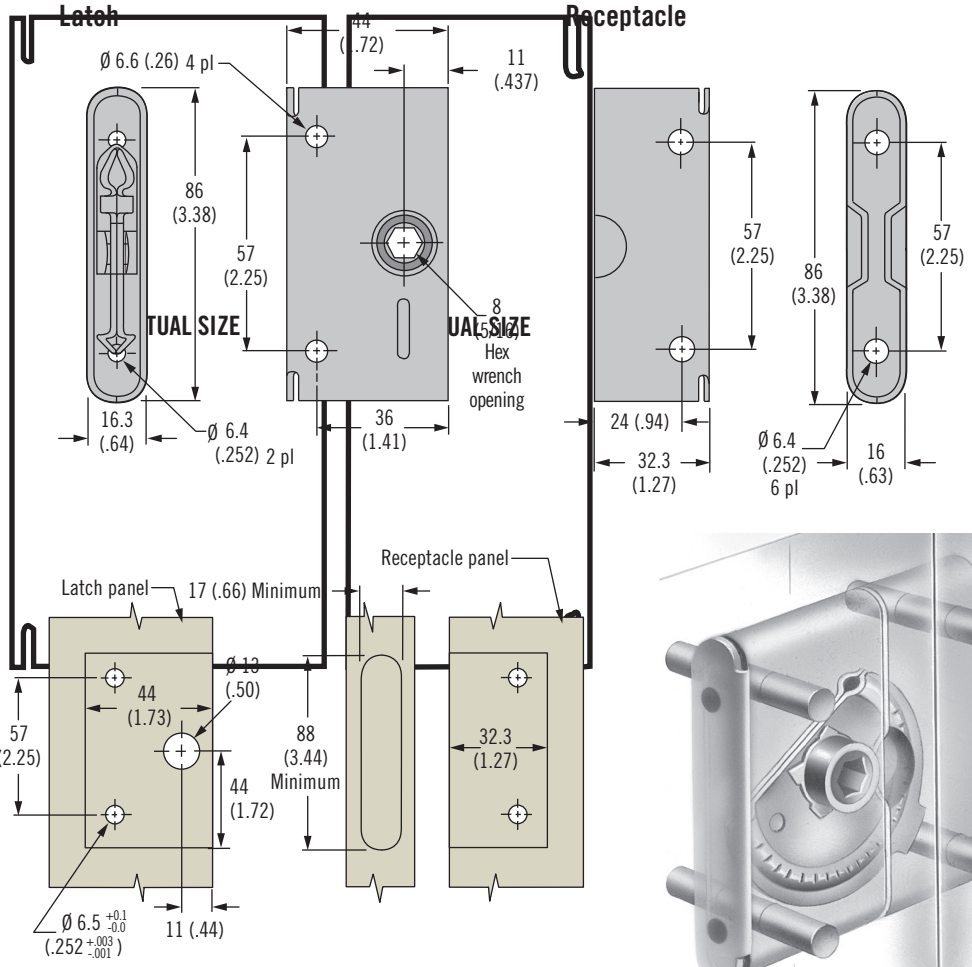



Accessories

Actuation Tool



Part Number	
Latch	R2-0055-02
Receptacle	R2-0002-02

R2 Draw Latch

Concealed · Front mount

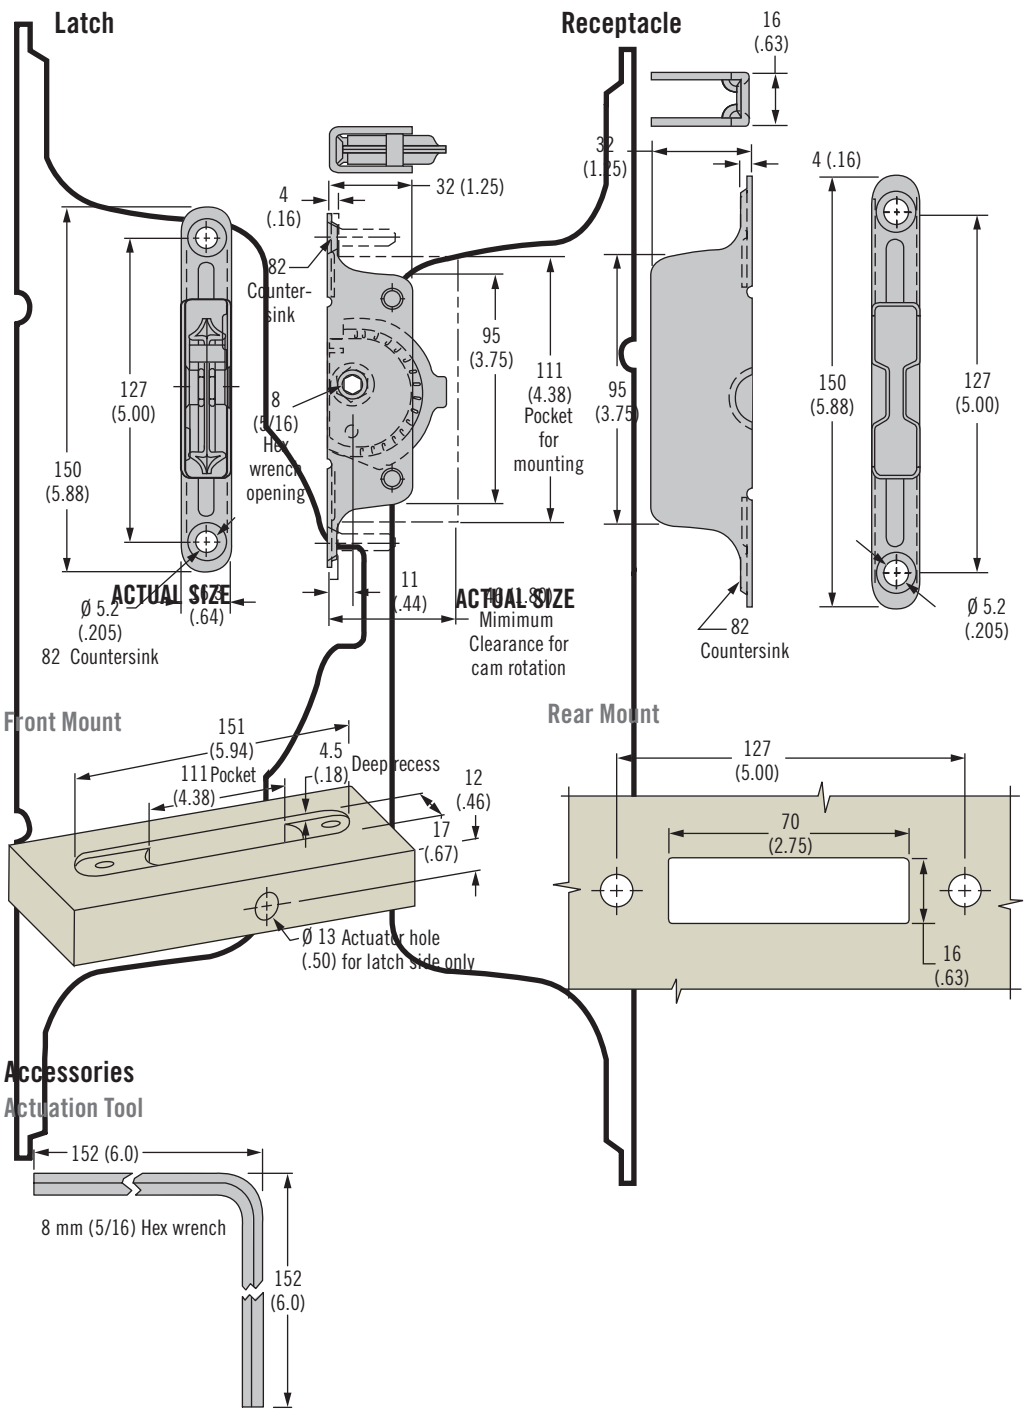

Part Number	
Latch	R2-0267-02
Receptacle	R2-0268-02

- **High tensile load**
- **Adjustable pull-up**
- **Front mount installation**

Material and Finish

Steel, zinc plated

Performance Details

Average ultimate tensile load:
4000 N (900 lbf)

Installation Notes:

Wood application:
Install assembly with M5 (No. 10) flat head screws (not supplied).
Note: Latch strength is dependant on mounting hardware and installation material

Metal application:
Install assembly with 5 (.196) flathead rivets or M5 (No. 10) screws. Note: Maximum metal panel thickness should be 2.5 (.10)

Accessories

Actuation tool
Part number: 29-0059-02

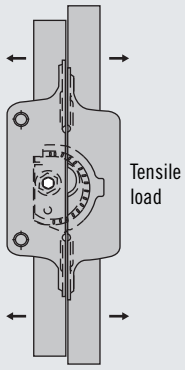

R5 Draw Latch

Concealed · Mortise Mount

- **High tensile load**
- **Consistent pull-up**
- **Concealed installation**

Material and Finish

Steel, zinc plated

Performance Details

Average ultimate tensile load:
11,100 N (2500 lbf)

Average ultimate shear load:
76,920 N (17292 lbf)

Installation Notes

Install assembly with Ø 6 (1/4) rivets or M6 (1/4) screws (not supplied)

Accessories

Actuation tool
Part number: 29-0059-02

Notes

Operating force
To open: 4 N•m (35 in•lbf)
To close: 4 N•m (35 in•lbf)



Latch

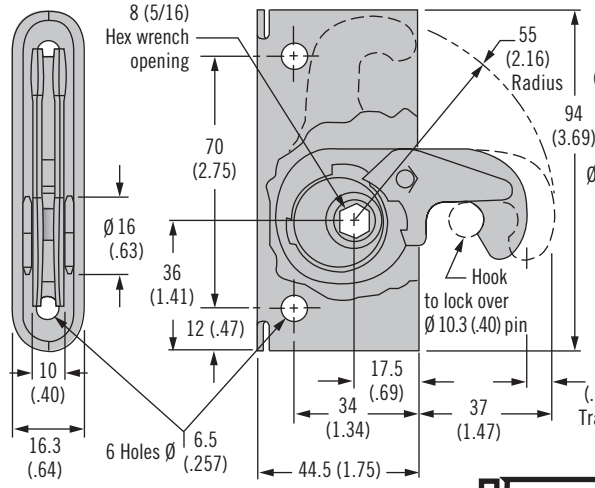

Receptacle

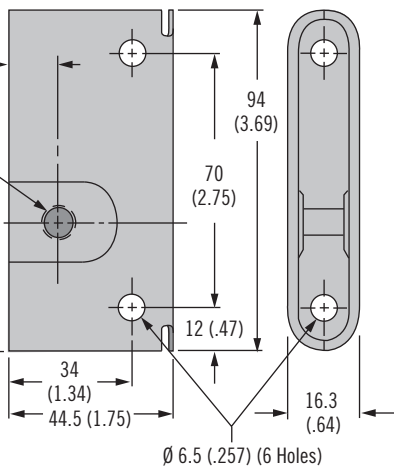

Recessed Pocket

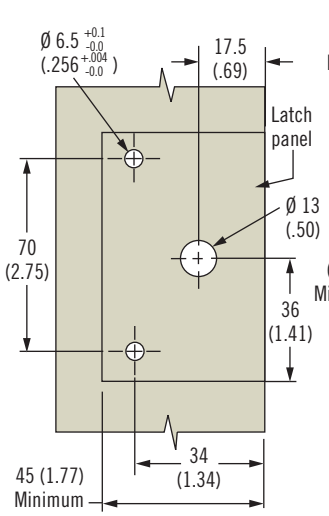

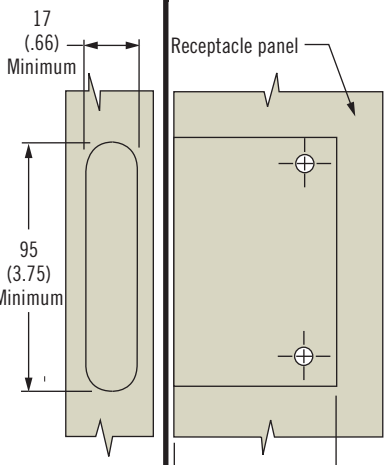

Side Mount

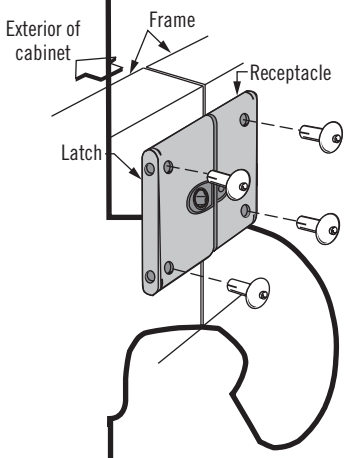

ACTUAL SIZE

Accessories

Actuation Tool



Part Number	
Latch	**Receptacle**
R5-0074-07	R5-0079-07