CP9104Q

60,000 RPM

CP9104Q K

High-speed for precision work

See details on page 63

FEATURES
- **3 mm and 1/8" collets included**
- Very low noise level: only 71 dB(A)
- High free speed: 60,000 rpm
- Included silencer hose

BENEFITS
- General Maintenance Applications pencil grinder
- Extremely easy to handle
- Quiet and lightweight
- Ideal for limited space applications

CP875

22,500 RPM

Compact & Lightweight

CP875 K

See details on page 63

FEATURES
- **1/4" and 6 mm collets**
- 90° angle head allows flexibility in tight areas
- Built-in air regulator

BENEFITS
- General Maintenance Applications angle die grinder
- Compact and lightweight tool designed for easy maneuverability
- Ideal for limited space applications

CP876

Similar features as CP875 with straight body

See accessories on pages 60 to 63

CP3000-600CR

60,000 RPM

High speed & durable body

FEATURES
- **1/8" collet - Product for imperial system only**
- High free speed: 60,000 rpm
- Steel but lightweight body
- Grooved housing
- Rotary valve
- Included silencer hose

BENEFITS
- Industrial Maintenance and Production Applications pencil grinder
- Great durability
- Operator comfort
- High precision

CP3000-600CR

Similar features as CP3000-600CR 1/8, with 3 mm collet size.

MODEL	PART NUMBER	FREE SPEED	POWER		COLLET CAPACITY		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP3000-600CR	615 160 0330	60,000	0.12	90	-	3	5.5	2.6	0.3	0.1	6.0	153	<2.5		71	82	1/4"
CP3000-600CR	615 160 0140	60,000	0.12	90	1/8	-	5.5	2.6	0.3	0.1	6.0	153	<2.5		71	82	1/4"
CP875	T023995	22,500	0.3	220	1/4	6	22.0	10.4	1.0	0.4	4.8	124	4.4	1.9	101	112	1/4"
CP876	T023996	30,000	0.3	220	1/4	6	23.9	11.3	0.7	0.3	4.7	121	<2.5		101	112	1/4"
CP9104Q	615 195 9104	60,000	0.05	40	1/8	3	7.0	3.2	0.5	0.2	5.2	133	<2.5		71	82	1/4"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com

UNI-BIS® industry solutions

CP9105Q-B

Quiet & efficient

FEATURES
- **0.32 hp (240 W) motor**
- 28,000 rpm free speed
- Low noise level: only 81 dB(A)
- Built-in air regulator
- Rubber overmould grip
- Rear exhaust
- Swivel air inlet
- Includes 1/4" and 6 mm collets

BENEFITS
- General Maintenance Applications die grinder
- High operator comfort
- Power and performance
- Ideal for limited space applications

CP9106Q-B

Similar features as CP9105Q-B with 23,000 rpm and 90° angle head

CP9108Q-B

Similar features as CP9105Q-B 23,000 rpm and 120° angle head

CP9110Q-B

Similar features as CP9105Q-B 27,000 rpm and with extended shaft

CP9111Q-B

22,000 RPM

CP9112Q-B

Similar features as CP9111Q-B with extended shaft

CP9111Q-B Kit Metric

See details on page 63

Powerful & quiet

FEATURES
- **0.47 hp (350 W) motor**
- 22,000 rpm free speed
- Low noise level: only 80 dB(A)
- Built-in air regulator
- Rubber overmould grip
- Rear exhaust
- Swivel air inlet
- Includes 1/4" and 6 mm collets

BENEFITS
- General Maintenance Applications die grinder
- High operator comfort
- Power and performance
- Ideal for limited space applications

CP860

24,000 RPM

CP860E

Same features as CP860 with 6 mm collet

CP860ES

Same features as CP860 with 6" extended shaft

CP860ESE

Same features as CP860E with 6" extended shaft and 6 mm collet

Great durability

FEATURES
- **1/4" collet**
- Rugged and energy efficient 0.54 hp (400 W) motor
- Adjustable speed regulator
- Lock-off throttle
- Square handle design for greater comfort

BENEFITS
- General Maintenance Applications die grinder
- Productivity and control
- Excellent for cleaning tires, moldings, porting, relieving engines, and general high-speed polishing and grinding

See accessories on pages 60 to 63

MODEL	PART NUMBER	FREE SPEED	POWER		COLLET CAPACITY		AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP860	T019704	24,000	0.54	400	1/4	-	21.0	9.9	20.9	9.9	1.2	0.5	5.7	146	3.7	1.6	92	103	1/4"
CP860E	T021136	24,000	0.54	400	-	6	21.0	9.9	20.9	9.9	1.2	0.5	5.7	146	3.7	1.6	92	103	1/4"
CP860ES	T023193	24,000	0.54	400	1/4	-	23.0	10.8	23.1	10.9	2.1	0.9	11.7	294	3.7	1.5	92	103	1/4"
CP860ESE	T023354	24,000	0.54	400	-	6	23.0	10.8	23.1	10.9	2.1	0.9	11.7	294	3.7	1.5	93	104	1/4"
CP9105Q-B	615 195 2105	28,000	0.3	240	1/4	6	19.7	9.3	8.6	4.1	0.8	0.4	6.3	160	3.6	2.0	80	91	1/4"
CP9106Q-B	615 195 2106	23,000	0.3	240	1/4	6	19.3	9.1	8.6	4.1	1.5	0.7	4.7	120	5.1	2.6	80	91	1/4"
CP9108Q-B	615 195 2108	23,000	0.3	240	1/4	6	19.3	9.1	8.6	4.1	1.1	0.5	7.9	200	5.1	1.6	80	91	1/4"
CP9110Q-B	615 195 2110	27,000	0.3	240	1/4	6	18.3	8.6	8.6	4.1	1.5	0.7	10.2	260	4.9	2.5	80	91	1/4"
CP9111Q-B	615 195 2111	22,000	0.47	350	1/4	6	23.1	10.9	8.6	4.1	1.5	0.7	6.3	160	3.7	1.6	80	91	1/4"
CP9112Q-B	615 195 2112	22,000	0.47	350	1/4	6	25.0	11.8	8.6	4.1	2.9	1.3	13.4	340	2.7	1.2	80	91	1/4"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

The CP3030 Series Benefits

Lightweight & ergonomic

- Industrial Maintenance and Production Applications angle die grinder
- Operator comfort
- High precision
- Industrial grade durability up to 1000 hours
- Easy maintenance

CP3030-325R

25,000 RPM

FEATURES

- **1/4" (6.35 mm) collet holder**
- 0.4 hp (300 W) industrial grade motor
- 25,000 rpm free speed
- Compact composite handle
- Streamlined safety lever
- Gearless durable construction
- 7° angle to allow working in tight angles
- Rear Exhaust

CP3030-325R

CP3030-330R
Same features as CP3030-325R with 30,000 rpm

CP3030-325F/330F
Same features as CP3030-325R with 25,000, 30,000 rpm and Front exhaust. **(Not for CE markets)**

CP3030-420R

20,000 RPM

FEATURES

- **1/4" (6.35 mm) collet holder**
- 0.54 hp (400 W) industrial grade motor
- 20,000 rpm free speed
- Compact composite handle
- Streamlined safety lever
- Gearless durable construction
- 7° angle to allow working in tight angles
- Rear exhaust

CP3030-418R/424R
Same features as CP3030-420R with respectively 18,000 - 24,000 rpm

CP3030-418F/420F/424F
Same features as CP3030-420R with same speeds and Front exhaust. **(Not for CE markets)**

CP3030-520R

20,000 RPM

CP3030-518R
Same features as CP3030-520R with 18,000 rpm

CP3030-518F/520F
Same features as CP3030-520R with same speeds and Front exhaust. **(Not for CE markets)**

FEATURES

- **1/4" (6.35 mm) collet holder**
- 0.5 hp (400 W) industrial grade motor
- 20,000 rpm free speed
- Compact composite handle
- Streamlined safety lever
- Gearless durable construction
- 7° angle to allow working in tight angles
- Rear Exhaust

See accessories on pages 60 to 63

MODEL	PART NUMBER	FREE SPEED	POWER		COLLET CAPACITY		AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP3030-325F	615 160 4120	25,000	0.4	300	1/4	6.35	20.6	9.7	16.3	7.7	1.1	0.5	6.1	154	<2.5		85	96	1/4"
CP3030-325R	615 160 4090	25,000	0.4	300	1/4	6.35	21.2	10	16.9	8.0	1.1	0.5	6.1	154	<2.5		79	90	1/4"
CP3030-330F	615 160 4110	30,000	0.4	300	1/4	6.35	22.0	10.4	17.5	8.3	1.1	0.5	6.1	154	<2.5		84	95	1/4"
CP3030-330R	615 160 4100	30,000	0.4	300	1/4	6.35	21.2	10	19.0	9.0	1.1	0.5	6.1	154	<2.5		77	88	1/4"
CP3030-418F	615 160 4160	18,000	0.54	400	1/4	6.35	25.0	11.8	20.5	9.7	1.8	0.8	6.8	174	<2.5		82	93	1/4"
CP3030-418R	615 160 4130	18,000	0.54	400	1/4	6.35	25.4	12	21.2	10.0	1.8	0.8	6.8	174	<2.5		75	86	1/4"
CP3030-420F	615 160 4170	20,000	0.54	400	1/4	6.35	21.4	10.1	21.4	10.1	1.8	0.8	6.8	174	<2.5		82	93	1/4"
CP3030-420R	615 160 4140	20,000	0.54	400	1/4	6.35	27.6	13	23.3	11.0	1.8	0.8	6.8	174	<2.5		76	87	1/4"
CP3030-424F	615 160 4180	24,000	0.54	400	1/4	6.35	23.1	10.9	23.1	10.9	1.8	0.8	6.8	174	<2.5		82	93	1/4"
CP3030-424R	615 160 4150	24,000	0.54	400	1/4	6.35	27.6	13	23.3	11.0	1.8	0.8	6.8	174	<2.5		77	88	1/4"
CP3030-518F	615 160 4210	18,000	0.7	500	1/4	6.35	29.3	13.8	23.9	11.3	1.8	0.8	6.8	174	<2.5		81	92	1/4"
CP3030-518R	615 160 4190	18,000	0.7	500	1/4	6.35	31.8	15	27.5	13.0	1.8	0.8	6.8	174	<2.5		80	91	1/4"
CP3030-520F	615 160 4220	20,000	0.7	500	1/4	6.35	29.3	13.8	25.0	11.8	1.8	0.8	6.8	174	<2.5		80	91	1/4"
CP3030-520R	615 160 4200	20,000	0.7	500	1/4	6.35	32.9	15.5	29.6	14.0	1.8	0.8	6.8	174	<2.5		80	91	1/4"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor

ul. Osiedle Leśne 1a
84-300 Lębork, Polska

tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com

www.uni-bis.com

UNI-BIS® industry solutions

The CP3019 Series Benefits

High performance in a compact package

- Industrial Maintenance and Production Applications die grinder
- Optimal productivity
- Superior Ergonomics
- Highest durability in demanding applications up to 2000 hours maintenance intervals

CP3019-31

31,000 RPM

FEATURES
- **1/4" (6.35 mm) collet holder**
- 0.5 hp (375 W) governed motor
- 31,000 rpm free speed
- Compact body
- Insulating composite over-housing
- Streamlined safety lever
- Rear exhaust

CP3019-18/20/25/40

Same features as CP3019-31 with respectively 18,000 - 20,000 - 25,000 - 40,000 rpm

CP3019-20/25/31/40 CNOMO

Same features as CP3019-31 with 20,000 - 25,000 - 31,000 - 40,000 rpm and 6 mm collet

CP3019-12AC

12,000 RPM

FEATURES
- **1/4" (6.35 mm) collet holder**
- 0.5 hp (375 W) governed motor
- 12,000 rpm free speed
- Compact body
- Insulating composite over-housing
- Streamlined safety lever
- Highly durable bevel gear
- Rear exhaust

CP3019-20AC

Same features as CP3019-12AC with 20,000 rpm

CP3019-12AC/20AC CNOMO

Same features as CP3019-12AC with 6 mm CNOMO collet

CP3019-31ES

31,000 RPM

High performance in a compact package

FEATURES

- **1/4" (6.35 mm) collet holder**
- Extended body
- 0.5 hp (375 W) governed motor
- 31,000 rpm free speed
- Compact body
- Insulating composite over-housing
- Streamlined safety lever
- Rear exhaust

BENEFITS

- Industrial Maintenance and Production Applications extended shaft die grinder
- Optimal productivity
- Superior Ergonomics
- Highest durability in demanding applications up to 2000 hours maintenance intervals

CP3019-20ES/25ES/40ES

Same features as CP3019-31ES with 20,000 - 25,000 - 40,000 rpm

CP3019-20ES/25ES/40ES CNOMO

Same features as CP3019-31ES with 6 mm CNOMO collet

CP3019-31ES

See accessories on pages 60 to 63

MODEL	PART NUMBER	FREE SPEED	POWER		COLLET CAPACITY		AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP3019-12AC	**615 160 4070**	12,000	0.5	375	1/4	6.35	6.8	3.2	16.9	8.0	1.1	0.5	8.5	216	3.7	1.9	78	89	1/4"
CP3019-20AC	**615 160 4080**	20,000	0.5	375	1/4	6.35	11.2	5.3	19.9	9.4	1.1	0.5	8.5	216	4.3	3.4	82	93	1/4"
CP3019-18	**615 160 0090**	18,000	0.5	375	1/4	6.35	5.3	2.5	15.0	7.1	0.8	0.3	6.7	169	<2.5		75	86	1/4"
CP3019-20	**615 160 0100**	20,000	0.5	375	1/4	6.35	6.4	3	19.0	9.0	0.8	0.3	6.7	169	4.1	1.5	74	85	1/4"
CP3019-25	**615 160 0110**	25,000	0.5	375	1/4	6.35	8.5	4	19.0	9.0	0.8	0.3	6.6	169	2.6	1.5	77	88	1/4"
CP3019-31	**615 160 0120**	31,000	0.5	375	1/4	6.35	10.0	4.7	21.2	10.0	0.8	0.3	6.6	169	3.3	2.0	79	90	1/4"
CP3019-40	**615 160 0130**	40,000	0.5	375	1/4	6.35	14.8	7	22.0	10.4	0.8	0.3	6.6	169	<2.5		81	92	1/4"
CP3019-20ES	**615 160 2170**	20,000	0.5	375	1/4	6.35	7.0	3.3	18.0	8.5	1.2	0.5	9.8	249	3.7	1.9	73	84	1/4"
CP3019-25ES	**615 160 2180**	25,000	0.5	375	1/4	6.35	7.6	3.6	19.0	9.0	1.2	0.5	9.8	249	3.2	1.7	76	87	1/4"
CP3019-31ES	**615 160 2190**	31,000	0.5	375	1/4	6.35	10.0	4.7	19.9	9.4	1.2	0.5	9.8	249	3.6	1.6	80	91	1/4"
CP3019-40ES	**615 160 2200**	40,000	0.5	375	1/4	6.35	14.8	7	21.2	10.0	1.2	0.5	9.8	249	3	2.0	80	91	1/4"
CP3019-20 CNOMO	**615 160 0340**	20,000	0.5	375	-	6	6.4	3	19.0	9.0	0.8	0.3	6.6	169	<2,5		74	85	1/4"
CP3019-25 CNOMO	**615 160 0350**	25,000	0.5	375	-	6	8.5	4	19.0	9.0	0.8	0.3	6.6	169	<2,5		78	89	1/4"
CP3019-31 CNOMO	**615 160 0360**	31,000	0.5	375	-	6	10.0	4.7	21.2	10.0	0.8	0.3	6.6	169	2.8	2.0	77	88	1/4"
CP3019-40 CNOMO	**615 160 0370**	40,000	0.5	375	-	6	14.8	7	22.0	10.4	0.8	0.3	6.6	169	2.8	1.4	77	88	1/4"
CP3019-20ES CNOMO	**615 160 2210**	20,000	0.5	375	-	6	7.0	3.3	18.0	8.5	1.2	0.5	9.8	249	2.9	0.9	75	86	1/4"
CP3019-25ES CNOMO	**615 160 2220**	25,000	0.5	375	-	6	7.6	3.6	19.1	9.0	1.2	0.5	9.8	249	4.7	2.4	78	89	1/4"
CP3019-31ES CNOMO	**615 160 2230**	31,000	0.5	375	-	6	10.0	4.7	19.9	9.4	1.2	0.5	9.8	249	<2,5		80	91	1/4"
CP3019-40ES CNOMO	**615 160 2240**	40,000	0.5	375	-	6	14.8	7	21.2	10.0	1.2	0.5	9.8	249	<2,5		78	89	1/4"
CP3019-12AC CNOMO	**615 160 4230**	12,000	0.5	375	-	6	6.8	3.2	16.9	8.0	1.1	0.5	8.5	216	3.7	1.9	78	89	1/4"
CP3019-20AC CNOMO	**615 160 4240**	20,000	0.5	375	-	6	11.2	5.3	19.9	9.4	1.1	0.5	8.5	216	4.3	3.4	82	93	1/4"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

CP3109-24

24,000 RPM

SUPER INDUSTRIAL

CP3109-19
CP3109-28

Same features as CP3119-24 with 19,000 - 28,000 rpm

CP3109-19ES
24ES/28ES

Same features as CP3109-24 with 19,000 - 24,000 - 28,000 rpm and extended shaft

High performance

FEATURES

- **1/4" (6.35 mm) collet holder**
- 0.8 hp (600 W) governed motor
- 24,000 rpm free speed
- Steel housing
- Insulating composite over-housing
- Streamlined safety lever
- Rear exhaust

BENEFITS

- Industrial Maintenance and Production Applications die grinder
- High productivity
- Highest durability in demanding applications up to 2000 hours maintenance intervals

CP3109-13AC

13,000 RPM

SUPER INDUSTRIAL

High performance

FEATURES

- **1/4" (6.35 mm) collet holder**
- 0.8 hp (600 W) governed motor
- 13,000 rpm free speed
- Steel housing
- Insulating composite over-housing
- Streamlined safety lever
- Highly durable bevel gear
- Rear exhaust

BENEFITS

- Industrial Maintenance and Production Applications die grinder
- Optimal productivity
- Highest durability in demanding applications up to 2000 hours maintenance intervals

See accessories on pages 60 to 63

CP3650-120ACC

12,000 RPM

Superlative performance & ergonomics

FEATURES

- **1/4" (6.35 mm) collet holder**
- 2.3 hp (1,700 W) high performance governed motor
- 12,000 rpm free speed
- Superior durability bevel gear
- Streamlined safety lever
- Spindle lock button

BENEFITS

- Highest durability in demanding applications up to 2000 hours
- Superior torque for maximal productivity
- Superior ergonomics

CP3650-120ACC

See pages 68-70 for CP3650 range presentation

See pages 78-80 for accessories

MODEL	PART NUMBER	FREE SPEED	POWER		COLLET CAPACITY		AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP3109-13AC	**615 160 4060**	13,000	0.8	600	1/4	6.35	21.0	10	31.8	15.0	2.4	1.1	8.6	216	3.7	1.4	85	96	3/8"
CP3109-19	**615 160 0020**	19,000	0.8	600	1/4	6.35	13.0	6	31.8	15.0	2.0	0.9	8.8	222	3.0	1.7	76	87	3/8"
CP3109-24	**615 160 0030**	24,000	0.8	600	1/4	6.35	21.0	10	31.8	15.0	2.0	0.9	8.8	222	<2.5		81	92	3/8"
CP3109-28	**615 160 0040**	28,000	0.8	600	1/4	6.35	34.0	16	31.8	15.0	2.0	0.9	8.8	222	<2.5		85	96	3/8"
CP3109-19ES	**615 160 2080**	19,000	0.8	600	1/4	6.35	13.0	6	31.8	15.0	2.9	1.3	14.5	363	<2.5		76	87	3/8"
CP3109-24ES	**615 160 2090**	24,000	0.8	600	1/4	6.35	21.0	10	31.8	15.0	2.9	1.3	14.2	361	<2.5		81	92	3/8"
CP3109-28ES	**615 160 2100**	28,000	0.8	600	1/4	6.35	34.0	16	31.8	15.0	2.9	1.3	14.2	361	<2.5		85	96	3/8"
CP3650-120ACC	**615 160 7230**	12,000	2.3	1,700	1/4	6.35	42.0	20	68.0	32.0	3.1	1.4	9.4	238	7.5	2.5	82	93	3/8"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar) Exept CP3650: 1/2" (13 mm) *Listed specifications are for reference only. Please check documents in each tool.*

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

CP9120CR

12,000 RPM

Lightweight & easy handling

FEATURES

- **4" (100 mm) wheel capacity**
- 0.8 hp (600 W) governed motor
- Adjustable protective guard
- Aluminum alloy housing
- Spiral bevel gears
- Ergonomic side handle

BENEFITS

- General Maintenance Applications angle wheel grinder
- Lightweight but rugged housing
- Durability and performance

FOR CE MARKET
NOT FOR N.A. MARKET

CP9120CR

CP9120CRN

Same features as CP9120-CR with different flanges for the North American market only

CP9122CR

Same features as CP9120-CR with 3/8"-24 spindle thread for 4.5" (114mm) discs

CP9122BR

Same features as CP9120-CR with 5/8"-11 spindle thread for 4.5" (114mm) discs

CP7500D

22,000 RPM

Compact cutting & grinding

CP7500D Kit

Part No. 8941075001
Kit includes:
- **(1) 2" (51mm) Angle Grinder / Cut-off Tool**
- (3) 2" (51mm) grinding wheel 60 Grit
- (3) 2" (51mm) grinding wheel 80 Grit
- (3) 2" (51mm) grinding wheel 120 Grit
- (5) 2" (51mm) cutting wheel
- (1) Pin wrench
- (1) Spanner
- (1) Protective glasses

FEATURES

- **2" (50 mm) wheel capacity**
- Cut-off tool adapter included
- Rubber handle grip
- Lock off safety lever
- Full 180° protective guard
- Side exhaust

BENEFITS

- General Maintenance Applications angle wheel grinder
- Compact and lightweight
- Versatile: designed for grinding and cutting
- Ideal for limited space applications

CP9122BR

See accessories on pages 76 to 81

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s^2)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP7500D	**894 107 5001**	22,000	0.2	150	2	50	3/8-24	17.0	8	8.0	3.7	1.2	0.5	5.5	140	19.9	6.7	81	92	1/4"
CP9120CR	**615 195 2120**	12,000	0.8	600	4	100	3/8-24	21.0	9.9	23.3	11.0	4.1	1.9	9.3	233	5.3	1.6	84	95	1/4"
CP9120CRN	**894 109 1200**	12,000	0.8	600	4	100	3/8-24	21.0	9.9	23.3	11.0	4.1	1.9	9.3	233	5.3	1.6	84	95	1/4"
CP9122BR	**615 195 7222**	12,000	0.8	600	4.5	115	5/8-11	21.0	9.9	29.7	14.0	4.2	1.9	9.3	233	8.6	4.6	84	95	1/4"
CP9122CR	**615 195 2122**	12,000	0.8	600	4.5	115	3/8-24	21.0	9.9	29.7	14.0	4.2	1.9	9.3	233	5.4	1.0	84	95	1/4"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

CP9121BR

12,000 RPM

Lightweight & easy handling

CP9121CR

Same features as CP9121-BR with 3/8"-24 spindle thread

CP9121AR

Same features as CP9121-BR with M14 spindle thread

FEATURES

- **5" (125 mm) wheel capacity**
- 5/8"-11 spindle thread
- 0.8 hp (600 W) governed motor
- Adjustable protective guard
- Aluminum alloy housing
- Spiral bevel gears
- Ergonomic side handle

BENEFITS

- General Maintenance Applications angle wheel grinder
- Lightweight but rugged housing
- Durability and performance

CP9121BR

See accessories on pages 76 to 81

CP3019-18A3

18,000 RPM

High performance in a compact package

FEATURES

- **3" (73 mm) wheel capacity**
- 0.5 hp (375 W) governed motor
- 18,000 rpm free speed
- Superior durability bevel gear
- Compact body
- Robust steel housing
- Insulating composite over housing
- Streamlined safety lever
- Highly durable bevel gear
- Rear exhaust

BENEFITS

- Industrial Maintenance and Production Applications angle wheel grinder
- Superior productivity
- High ergonomics
- Maximal Industrial durability up to 2,000 hours

CP3019-18A3

CP3019-20A3

Similar features as CP3019-18A3 with 20,000 rpm

CP3019-13A4

Similar features as CP3019-18A3 with 13,500 rpm and with 4" wheel capacity

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP3019-13A4	615 160 7050	13,500	0.5	375	4	100	3/8-24	7.4	3.5	17.6	8.3	0.3	0.6	6.4	163	8.6	3.0	79	90	1/4"
CP3019-18A3	615 160 7060	18,000	0.5	375	3	75	3/8-24	10.4	4.9	19.3	9.1	0.2	0.6	6.4	163	12.3	2.6	80	91	1/4"
CP3019-20A3	615 160 7070	20,000	0.5	375	3	75	3/8-24	12.7	6	19.0	9.0	0.2	0.6	6.4	163	13.3	3.2	82	93	1/4"
CP9121BR	615 195 7221	12,000	0.8	600	5	125	5/8-11	21.0	9.9	27.5	13.0	4.6	2.1	9.6	240	8.6	4.6	84	95	1/4"
CP9121CR	615 195 2121	12,000	0.8	600	5	125	3/8-24	21.0	9.9	25.4	12.0	4.6	2.1	9.6	240	11.2	3.4	84	95	1/4"
CP9121AR	615 195 7321	12,000	0.8	600	5	125	M14	21.0	9.9	27.6	13.0	4.6	2.1	9.6	240	6.7	2.2	84	95	1/4"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

<0.8 hp (600W) Angle Wheel Grinders 4" & 5"

CP3040GABTIM

13,500 RPM

Robust steel construction

FEATURES

- **4" (100 mm) wheel capacity**
- Short body
- 1 hp (750 W) motor
- 13,500 rpm free speed
- Durable bevel gear
- Robust machined steel housing
- Robust safety lever
- Side exhaust

BENEFITS

- Industrial Maintenance and Production Applications angle wheel grinder
- High body durability
- Withstands rough usage
- Withstands extreme temperatures

CP3040GABTIM

CP3040-GASTIM

Similar features as CP3040 GABTIM with extended shaft

CP854

13,000 RPM

CP854 E

Same features as CP854 with 5" (125 mm) max wheel capacity and M10 spindle thread

Efficient & durable

FEATURES

- **4" (100 mm) wheel capacity**
- Powerful 0.6 hp (450 W) high performance motor
- Aluminum alloy housing, yet lightweight tool
- Spiral bevel gearing in angle

BENEFITS

- General Maintenance Applications angle wheel grinder
- Lightweight but rugged housing
- Durability and performance

CP3109-13A4

13,000 RPM

High performance

CP3109-13A4ES

Similar features as CP3109-13A4 with extended shaft

FEATURES

- **4" (100 mm) wheel capacity**
- 0.8 hp (600 W) governed motor
- 13,000 rpm free speed
- Superior durability bevel gear
- Steel housing
- Insulating composite over housing
- Streamlined safety lever
- Highly durable bevel gear
- Rear exhaust

BENEFITS

- Industrial Maintenance and Production Applications angle wheel grinder
- Optimal productivity
- Highest durability in demanding applications up to 2,000 hours maintenance intervals

See accessories on pages 76 to 81

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP854E	T023187	12,000	0.7	525	5	125	M10	16.0	7.5	16.0	7.5	3.7	1.7	9.0	229	4.9	1.5	85	96	1/4"
CP854	T023186	13,000	0.7	525	4	100	3/8-24	24.0	11.3	24.0	11.3	3.7	1.7	9.0	229	4.9	1.5	85	96	1/4"
CP3040GASTIM	615 160 7020	13,500	0.7	520	4	100	3/8-24	32.8	15.5	26.5	12.5	3.7	1.7	10.6	270	9.6	3.3	92	103	3/8"
CP3040GABTIM	615 160 7010	13,500	0.7	520	4	100	3/8-24	32.8	15.5	26.5	12.5	3.3	1.5	8.3	210	7.2	2.4	88	99	3/8"
CP3109-13A4ES	615 160 7040	13,000	0.8	600	4	100	3/8-24	21.0	10	32.0	15.1	1.5	3.3	11.3	287	7.2	2.4	84	95	3/8"
CP3109-13A4	615 160 7030	13,000	0.8	600	4	100	3/8-24	21.0	10	32.0	15.1	1.2	2.6	8.5	217	9.3	3.0	85	96	3/8"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

CP3450-12AC4

12,000 RPM

INDUSTRIAL GRADE ANGLE GRINDER

CP3450-12ACR4

Same features as CP3450-12AC4 with 4" (100 mm) max wheel capacity, and rotative throttle
(Not for CE/NA markets)

CP3450-12AC45

Same features as CP3450-12AC4 with 4.5" (115 mm) max wheel capacity

FEATURES

- **4" (100 mm) wheel capacity**
- 1.1 hp (810 W) high torque motor
- 12,000 rpm free speed
- 3/8" spindle
- Aluminium body
- Constant lubrication bevel gear design
- Insulating composite cover
- Robust safety lever
- Optional low vibration side handle
- Rear exhaust

BENEFITS

- Industrial Maintenance and Production applications angle wheel grinder
- High productivity
- Industrial grade durability up to 1000 hours
- Light body

CP3450-12AB5

12,000 RPM

INDUSTRIAL GRADE ANGLE GRINDER

FEATURES

- **5" (125 mm) wheel capacity**
- 1.1 hp (810 W) high torque motor
- 12,000 rpm free speed
- 5/8" spindle
- Constant lubrication bevel gear design
- Aluminium body
- Insulating composite cover
- Orientable safety lever
- Optional low vibration side handle
- Rear exhaust

BENEFITS

- Industrial Maintenance and Production applications angle wheel grinder
- High productivity
- Industrial grade durability up to 1000 hours
- Light body

CP3450-12AB5

CP3450-12AA5

Same features as CP3450-12AB5 with M14 spindle

See accessories on pages 76 to 81

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP3450-12AB5	615 160 4050	12,000	1.1	810	5	125	5/8-11	38.5	18.2	36.0	17.0	3.7	1.7	9.2	231	8.5	2.8	95	106	3/8"
CP3450-12AA5	615 160 4040	12,000	1.1	810	5	125	M14	38.5	18.2	36.0	17.0	3.7	1.7	9.2	231	8.1	2.9	95	106	3/8"
CP3450-12ACR4	615 160 4020	12,000	1.1	810	4	100	3/8-24	42.8	20.2	36.0	17.0	3.2	1.4	9.2	230	8.1	2.8	93	104	3/8"
CP3450-12AC4	615 160 4010	12,000	1.1	810	4	100	3/8-24	37.7	17.8	36.0	17.0	3.1	1.4	9.2	230	6.5	2.0	93	104	3/8"
CP3450-12AC45	615 160 4030	12,000	1.1	810	4.5	115	3/8-24	38.1	18	36.0	17.0	3.1	1.4	9.2	230	8.3	3.0	93	104	3/8"

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

Grinding

CP3650

ENGINEERED FOR YOUR PRODUCTIVITY

UNIQUE FEATURES Premium Tool

HIGH PRODUCTIVITY

- Powerful CP governed motor offers a higher torque at maximum operating speed, increasing productivity
- Excellent power to weight ratio 2.3 HP for 3.4 lbs / 1,700 W for 1.4 kg
- Spindle lock button, for single tool abrasive replacement
- Autobalancer optimizes contact between abrasive and application, increasing the productivity by 15%

GRINDING, SANDING & CUTTING APPLICATIONS

- Foundries, Metalworking
- Shipyards, Rolling stock
- Oil, Gas & Petrochemical Maintenance
  In cast iron, steel, stainless steel, aluminum, composite, magnesium, titanium...

LOW NOISE LEVEL EXHAUST, WITH BUILT IN ANTI-BARKING VALVE
Quiet down to 68 dBA, with its optional silencer, the valve prevents dust from entering the tool when the motor stops.

STREAMLINED AND ERGONOMIC TWO POSITION SAFETY TRIGGER
Non affecting operator's grip, while allows to be positioned above or under the housing

COMPOSITE OVER-SLEEVE
Thermic insulation for operators comfort and steady grip for safety

FAST AND EASY ABRASIVE CHANGE
The spindle lock button allows a quicker abrasive replacement

GREAT PRODUCTIVITY AND DURABILITIY
Powerful governed
2.3 hp / 1,700 Watts Motor for the maximum torque at the right speed.

VIBRATION DAMPING SIDE HANDLE
For great operator comfort

UNIQUE KEYLESS, ADJUSTABLE ON 270° ROBUST GUARD
Allows quick guard adjustment and great operator comfort while maintaining maximal safety *(non available on 4" (100 mm) and 6" (150 mm) versions)*

AUTOBALANCER (OPTIONAL)
Compensates abrasive vibration and optimizes the contact between the abrasive and application for a material removal rate increased up to +15%

SUPER DURABLE SPIRAL BEVEL GEAR
The spiral shaped teeth of the helical bevel gear and pinion engage gradually to reduce vibration and stress of torque transmission resulting in up to 2000 hours between service intervals

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com

UNI-BIS® industry solutions

The CP3650 Series Benefits

UNIQUE FEATURES Premium Tool

SUPER INDUSTRIAL

Superlative performance & ergonomics

- **Industrial Maintenance and Production applications angle wheel grinder**
- **Highest durability in demanding applications up to 2,000 hours maintenance intervals**
- **Superior torque for maximal productivity**
- **Superior ergonomics**

CP3650-120AB45

12,000 RPM

CP3650-120AA45

Similar features as CP3650-120AB45 with M14 spindle

FEATURES
- **4.5" (115 mm) wheel capacity**
- 5/8"-11 spindle thread
- 2.3 hp (1,700 W) high performance governed motor
- 12,000 rpm free speed
- Superior durability bevel gear
- Streamlined safety lever
- Spindle lock button
- Keyless rotative guard

CP3650-135AC4FK

13,500 RPM

FEATURES
- **4" (100 mm) wheel capacity**
- 3/8-24 spindle thread
- 2.3 hp (1,700 W) high performance governed motor
- 13,500 rpm free speed
- Superior durability bevel gear
- Streamlined safety lever
- Spindle lock button
- Auto balancer

CP3650-120AA5

12,000 RPM

FEATURES
- **5" (125 mm) wheel capacity**
- M14 spindle thread
- 2.3 hp (1,700 W) high performance governed motor
- 12,000 rpm free speed
- Superior durability bevel gear
- Streamlined safety lever
- Spindle lock button
- Keyless rotative guard

CP3650-120AA5

CP3650-120AB5

Similar features as CP3650-120AA5 with 5/8"-11 spindle thread

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP3650-135AC4FK	615 160 7170	13,500	2.3	1,700	4	100	3/8-24	53.0	25	74.0	35.0	3.4	1.5	9.3	238	16.7	5.0	82	93	3/8"
CP3650-120AB45	615 160 7320	12,000	2.3	1,700	4.5	115	5/8-11	42.0	42	68.0	32.0	3.9	1.7	9.3	238	7.8	4.6	82	93	3/8"
CP3650-120AB5	615 160 7220	12,000	2.3	1,700	5	125	5/8-11	42.0	20	68.0	32.0	3.9	1.7	9.3	238	7.5	2.5	82	93	3/8"
CP3650-120AA45	615 160 7310	12,000	2.3	1,700	4.5	115	M14	42.0	42	68.0	32.0	3.9	1.7	9.3	238	7.8	4.6	82	93	3/8"
CP3650-120AA5	615 160 7210	12,000	2.3	1,700	5	125	M14	42.0	20	68.0	32.0	3.9	1.7	9.3	238	7.1	2.2	82	93	3/8"

All models: Hose int. 1/2" (13 mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

The CP3650 Series Benefits

Superlative performance & ergonomics

- Industrial Maintenance and Production applications angle wheel grinder
- Highest durability in demanding applications up to 2,000 hours maintenance intervals
- Superior torque for maximal productivity
- Superior ergonomics

CP3650-120AH5VK

12,000 RPM

FEATURES

- **5" (125 mm) wheel capacity**
- HEX spindle thread
- 2.3 hp (1,700 W) high performance governed motor
- 12,000 rpm free speed
- Superior durability bevel gear
- Streamlined safety lever
- Spindle lock button
- Keyless rotative guard
- Auto balancer

CP3650-120AH5VK

CP3650-120AB5VK
Similar features as CP3650-120AH5VK with 5/8" spindle

CP3650-120AA5VK
Similar features as CP3650-120AH5VK with M14 spindle

CP3650-100AB6VK

10,000 RPM

FEATURES

- **6" (150 mm) wheel capacity**
- 5/8"-11 spindle thread
- 2.3 hp (1,700 W) high performance governed motor
- 10,000 rpm free speed
- Superior durability bevel gear
- Streamlined safety lever
- Spindle lock button
- Auto balancer

See accessories on pages 76 to 81

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP3650-120AB5VK	**615 160 7190**	12,000	2.3	1,700	5	125	5/8-11	42.0	20	68.0	32.0	4.2	1.9	9.3	238	4.5	1.1	79	90	3/8"
CP3650-120AH5VK	**615 160 7200**	12,000	2.3	1,700	5	125	HEX	42.0	20	68.0	32.0	4.3	2.0	9.3	238	4.5	1.1	79	90	3/8"
CP3650-120AA5VK	**615 160 7180**	12,000	2.3	1,700	5	125	M14	42.0	20	68.0	32.0	4.2	1.9	9.3	238	4.5	2.0	79	90	3/8"
CP3650-100AB6VK	**615 160 7300**	10,000	2.3	1,700	6	150	5/8-11	42.0	20	68.0	32.0	4.2	1.9	9.3	238	5.2	1.5	79	90	3/8"

All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

CP9123

7,500 RPM

Robust construction

FEATURES
- **7" (180mm) angle grinder**
- 5/8"-11 spindle thread
- 1.1 hp (850 W) powerful governed motor
- Aluminum alloy housing
- Ergonomic left and right hand side handle
- Rubber handle grip

BENEFITS
- General Maintenance Applications angle wheel grinder
- Rugged housing
- Durability and performance

CP857

7,500 RPM

Powerful & durable

FEATURES
- **7" (178 mm) wheel capacity**
- Powerful 1.3 hp (938 W) high performance motor
- Aluminum alloy housing, yet lightweight tool
- Spiral bevel gearing in angle

BENEFITS
- General Maintenance Applications angle wheel grinder
- Rugged housing
- Durability

See accessories on pages 76 to 81

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
CP857	T024387	7,500	1.2	940	7	180	5/8-11	24.0	11.3	24.0	11.3	6.2	2.8	13.1	334	3.9	1.3	102	113	3/8"
CP9123	615 195 9123	7,500	1.1	850	7	180	5/8-11	40.0	18.9	24.0	11.3	7.4	3.4	13.4	340	4.3	1.3	93	104	3/8"

CP857: hose int. 3/8" (9.5mm) - CP9123: hose 5/8" (15mm)- @90 PSI (@6.3 Bar) *Listed specifications are for reference only. Please check documents in each tool.*

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

Grinding

CP3850

THE ULTIMATE MATERIAL REMOVAL TOOL

UNIQUE FEATURES
Premium Tool

HIGH PRODUCTIVITY

- Powerful CP governed motor offers a higher torque at maximum operating speed, increasing productivity
- Highest power to weight ratio 2.8 hp for 5.1 lbs / 2,100 W for 2.7 kg
- Spindle lock button, for single tool abrasive replacement
- Autobalancer optimizes contact between abrasive and application, increasing the productivity by 15%

GRINDING, SANDING & CUTTING APPLICATIONS

- Foundries, Metalworking
- Shipyards, Rolling stock
- Oil, Gas & Petrochemical Maintenance
- Composite materials

SUPERIOR COMFORT
Curved design positions operator's wrist straight to ease holding position

ERGONOMIC DOUBLE ACTION SAFETY LEVER
Durable solution eases tool's grip, and reduces risk of mishandling

360° AIR EXHAUST MUFFLER INTEGRATED
Improves operator comfort and extends constant use keeping the noise level, as low as 84 dB(A)

MULTI-POSITION GUARD
The 220° multi-position robust guard provides durable operator protection, flexibility and comfort

FAST AND EASY DISC CHANGE
The spindle lock button allows a quicker abrasive replacement

MULTI-POSITION VIBRATION DAMPING SIDE HANDLE
Adjustable 360° side handle, left and right, for greater operator comfort

LOW PROFILE ANGLE HEAD
Allows grinding in restricted areas and improves operator's view on abrasive

CP MAGNET
Collects debris and extends life of bevel gear

AUTOBALANCER (OPTIONAL) NOT FOR ANSI MARKET
Compensates abrasive vibration and optimizes the contact between the abrasive and application for a material removal rate increased up to +15%

SUPER DURABLE SPIRAL BEVEL GEAR
The spiral shaped teeth of the helical bevel gear and pinion engage gradually to reduce vibration and stress of torque transmission resulting in up to 2000 hours durability between service intervals

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com

UNI-BIS® industry solutions

The CP3850 Series Benefits

Superlative performance & ergonomics

- Industrial Maintenance and Production applications angle wheel grinder
- Highest durability in demanding applications
  up to 2,000 hours maintenance intervals
- Superior torque for maximum productivity
- Superior ergonomics

CP3850-60AB9V

6,000 RPM

FEATURES
- **9" (230 mm) wheel capacity**
- 2.8 hp (2,100 W) high performance governed motor
- 6,000 rpm free speed
- Low profile angle head
- Superior durability bevel gear
- Curved handle housing
- Double action safety lever
- Integrated silencer
- Orientable exhaust
- Spindle lock button
- Vibration damping multi-position side handle
- **ANSI certification / not for CE Markets**

CP3850-85AB7V

8,500 RPM

FEATURES
- **7" (180 mm) wheel capacity**
- 2.8 hp (2,100 W) high performance governed motor
- 8,500 rpm free speed
- Low profile angle head
- Superior durability bevel gear
- Curved handle housing
- Double action safety lever
- Integrated silencer
- Orientable exhaust
- Spindle lock button
- Vibration damping multi-position side handle
- **ANSI certification / not for CE Markets**

CP3850-85AB7V

CP3850-77AB7V

same features as CP3850-85AB7V with 7,700 rpm

See accessories on pages 76 to 81

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
For ANSI NA market																				
CP3850-77AB7V	**615 170 4960**	7,700	2.8	2,100	7	180	5/8-11	33.0	16	69.0	32.0	6.6	3.0	13.4	340	5.3	1.1	84	95	1/2"
CP3850-85AB7V	**615 160 7440**	8,500	2.8	2,100	7	180	5/8-11	36.0	17	77.0	36.0	6.6	3.0	13.4	340	5.7	1.1	87	98	1/2"
CP3850-60AB9V	**615 160 7340**	6,000	2.8	2,100	9	230	5/8-11	44.0	21	80.0	38.0	7.0	3.2	13.4	340	6.8	1.1	93	104	1/2"

All models: Hose int. 5/8" (15mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

The CP3850 Series Benefits

Superlative performance & ergonomics

- Industrial Maintenance and Production applications angle wheel grinder
- Highest durability in demanding applications up to 2,000 hours maintenance intervals
- Superior torque for maximum productivity
- Superior ergonomics

CP3850-85AB7VE

8,500 RPM

FEATURES

- **7" (180 mm) wheel capacity**
- 2.8 hp (2,100 W) high performance governed motor
- 8,500 rpm free speed
- Low profile angle head
- Superior durability bevel gear
- Curved handle housing
- Double action safety lever
- Integrated silencer
- Orientable exhaust
- Spindle lock button
- Auto balancer
- Vibration damping multi-position side handle
- **CE certification / not for North American Market**

CP3850-85AB7VE

CP3850-85AH7VE

Similar features as CP3850-85AB7VE with Hex spindle

CP3850-65AB9VE

6,500 RPM

CP3850-65AH9VE

Similar features as CP3850-65AB9VE with Hex spindle

FEATURES

- **9" (230 mm) wheel capacity**
- 2.8 hp (2,100 W) high performance governed motor
- 6,500 rpm free speed
- Low profile angle head
- Superior durability bevel gear
- Curved handle housing
- Double action safety lever
- Integrated silencer
- Orientable exhaust
- Spindle lock button
- Auto balancer
- Vibration damping multi-position side handle
- **CE certification / not for North American Market**

See accessories on pages 76 to 81

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s²)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
For CE market																				
CP3850-85AB7VE	**615 170 4920**	8,500	2.8	2,100	7	180	5/8-11	36.0	17	77.0	36.0	6.4	2.9	13.4	340	5.7	1.1	87	98	1/2"
CP3850-85AH7VE	**615 170 4930**	8,500	2.8	2,100	7	180	HEX	36.0	17	77.0	36.0	5.9	2.7	13.3	340	5.4	1.0	93	104	1/2"
CP3850-65AB9VE	**615 170 4940**	6,500	2.8	2,100	9	230	5/8-11	44.0	21	80.0	38.0	5.9	2.7	13.4	340	5.7	1.1	93	104	1/2"
CP3850-65AH9VE	**615 170 4950**	6,500	2.8	2,100	9	230	HEX	44.0	21	80.0	38.0	6.4	2.9	13.3	340	5.4	1.0	93	104	1/2"

All models: Hose int. 5/8" (15mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor

ul. Osiedle Leśne 1a
84-300 Lębork, Polska

tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com

www.uni-bis.com

UNI-BIS industry solutions

The CP3349 Series Benefits

SUPERLATIVE PERFORMANCE IN HEAVY APPLICATIONS

- Industrial Maintenance and Productionapplications vertical wheel grinder
- Highest durability in demanding applications up to 2,000 hours
- Superior torque for maximal productivity

CP3349-SALAVEL

6,500 RPM

FEATURES
- **9" (230 mm) wheel capacity**
- 4 hp (3,000 W) high performance governed motor
- 6,500 rpm free speed
- Robust housing
- Built-in lubricant tank
- Double action safety lever
- Overspeed prevention device included
- **ANSI compliant for NA markets**

CP3349-SALAVELE

For CE market

CP3349-SALAVET

6,000 RPM

FEATURES
- 6" (150 mm) cup wheel capacity
- 4 hp (3,000 W) high performance governed motor
- 6,000 rpm free speed
- Robust housing
- Built-in lubricant tank
- Double action safety lever
- Overspeed prevention device included
- **ANSI compliant for NA markets**

CP3349-SALAVETE

For CE market

CP3349-SALAVADE

7,700 RPM

FEATURES
- **7" (180 mm) wheel capacity**
- 4 hp (3,000 W) high performance governed motor
- 7,700 rpm free speed
- Robust housing
- Built-in lubricant tank
- Double action safety lever

CP3349-SALAVADE

See accessories on pages 76 to 81

MODEL	PART NUMBER	FREE SPEED	POWER		MAX WHEEL CAPACITY		SPINDLE THREAD	AIR CONS. AT FREE SPEED		AIR CONS. @LOAD		NET WEIGHT		LENGTH		VIBRATION LEVEL ISO 28927 (m/s^2)		SOUND PRESS.	SOUND POWER	AIR INLET
		rpm	hp	W	in.	mm	in.	cfm	l/s	cfm	l/s	lb	kg	in.	mm	a	k	ISO 15744 - dB(A)		
For ANSI NA Market																				
CP3349-SALAVEL	**615 160 9070**	6,500	4.0	3,000	9	230	5/8-11	27.0	13	93.0	44.0	9.7	4.4	11.0	280	4.0	NA	87	98	1/2"
CP3349-SALAVET	**615 160 9080**	6,000	4.0	3,000	6	150	5/8-11	25.0	12	91.0	43.0	9.7	4.4	11.0	280	2.5	-	84	95	1/2"
For CE Market																				
CP3349-SALAVADE	**615 160 9110**	7,700	4.0	3,000	7	180	5/8-11	40.0	19	97.0	46.0	9.2	4.2	11.0	280	4.6	NA	88	99	1/2"
CP3349-SALAVETE	**615 160 9150**	6,000	4.0	3,000	6	150	5/8-11	25.0	12	91.0	43.0	9.7	4.4	11.0	280	2.5	-	84	95	1/2"
CP3349-SALAVELE	**615 160 9130**	6,500	4.0	3,000	9	230	5/8-11	27.0	13	93.0	44.0	9.7	4.4	11.0	280	4.0	NA	87	98	1/2"

All models: Hose int. 5/8" (15mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com

Accessories & Spares

INCLUDED ACCESSORIES

MODEL	ITEM	DESCRIPTION	PART NUMBER
CP7500		2" Grinding wheel 60 Grit (5 PC) 20,000 (max speed)	894 016 2768
		2" Grinding wheel 80 Grit (5 PC) 20,000 (max speed)	894 016 2769
		2" Grinding wheel 120 Grit (5 PC) 20,000 (max speed)	894 016 2770
		Pin wrench	894 016 2763
		Spanner	894 016 2759
		Nuts	894 016 2765
		2" Cutting wheel 20,000 (max speed)	894 016 4490
CP9120CR		**4" (100 mm) Disc Guard**	205 048 4873
		Flange	205 048 4883
		Flange Nut	205 048 4893
		Spanner	205 048 4993
		Pin wrench	205 048 5003
		Side Handle	205 048 5013
CP9120CRN		Rear Flange (3/8"-24)	205 055 6483
		Front Flange nut (3/8"-24)	205 055 6493
		Flange nut (3/8"-24)	205 055 6513
CP9122BR/CR		**4-1/2" (114 mm) Disc Guard**	205 053 4023
		Flange for 3/8"-24UNF	205 053 3943
		Flange for 5/8"-11UNF	615 503 1600
		Flange Nut for 3/8"-24UNF	205 053 3973
		Flange Nut for 5/8"-11UNF	615 502 0780
		Spanner	205 053 4033
		Pin Wrench	205 048 6673
		Side Handle	205 052 4063
CP9121CR/BR/AR		**5" (125 mm) Disc Guard**	205 053 4013
		Flange for M14x2	615 503 1590
		Flange for 3/8"-24UNF	205 053 3943
		Flange for 5/8"-11UNF	615 503 1600
		Flange Nut for M14x2	615 502 0770
		Flange Nut for 3/8"-24UNF	205 053 3973
		Flange Nut for 5/8"-11UNF	615 502 0780
		Spanner	205 053 4033
		Pin Wrench	205 048 6673
		Side Handle	205 052 4063
		Complete Sanding kit ø125 mm thread pad 3/8" x24UNF	205 049 8533
CP3019-..A3 CP3019-..A3	1	Exhaust hose L= 31" (0.8m)	615 875 1060
	2	**3" (76mm) Disc Guard**	615 504 1550
	3	Flange	615 502 0640
	4	Flange	615 503 1440
	.	Pin Wrench	615 802 0080
	.	Flat wrench 7/16" (11mm)	615 801 0030
CP9123		**Disc Guard**	205 050 0973
		Flange	205 050 0963
		Flange Nut	205 050 0983
		Spanner	205 050 1193
		Hex. Key Wrench	205 050 1213
		Wheel retainter, nut	KF142108
		Wrench stop spanner	C136927
		Wrench spanner	KF141865
		Side handle	C136901
CP9111Q-B, CP9112Q-B		Double Ended Spanner	205 049 6453
		Spanner	205 049 6443
CP9105Q-B, CP9106Q-B, CP9107, CP9108Q-B		Spanner (2)	CA144807
CP854	1	**4" (100mm) Disc Guard**	C136898
	2	Nut	C138512
	3	Wheel adapter	C128495
	4	Wheel retainter, nut	C050588
	.	Wrench stop spanner	C136927
	.	Wrench wheel spanner	C136926
	.	Wrench 5/8" open end	C139702
	.	Side handle	C136901
CP854E	1	**5" (125mm) Disc Guard**	C136898
	2	Nut	C138512
	.	Wheel adapter	KF141861
CP857	1	**7" (180mm) Disc Guard**	C139081
	.	Wrench-spindle	C141027
	.	Wrench -3/8 Hex	P084363
	2	Adapter	C087920

For 3/8" hole disc



CP854(E)



CP857



UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com

Accessories & Spares

INCLUDED ACCESSORIES

CP3040...



For 3/8" & 5/8" hole disc



For 3/8" & 5/8" hole disc

For 3/8" & 5/8" hole disc

For 7/8" hole disc

For 7/8" hole disc

For 7/8" hole disc

For 5/8" hole disc

MODEL	ITEM	DESCRIPTION	PART NO.
CP3040-GABTIM **CP3040-GASTIM**	1 2 3 4 5	**ø 4" (100mm) Guard Disc** Rear flange 3/8" Rear flange 5/8" Flange nut 3/8" Flange nut 5/8" Spanner Wrench (for 3/8" flange) Pin Wrench (for 3/8" flange) Spanner Wrench (for 3/8" flange) Spanner Wrench (for 5/8" flange) Pin wrench (for 5/8" flange)	**205 054 5213** **205 054 4263** **205 055 2633** **205 054 4273** **205 055 2643** **205 054 4293** **205 054 4283** **205 054 4303** **205 055 2953** **205 055 2943**
CP3019-..A3 **CP3019-..A4**	1 2 2 3 4 5 . .	Exhaust hose L= 31" (0.8m) **3" (76mm) Disc Guard (A3)** **4" (100mm) Disc Guard (A4)** Flange Flange Rear flange Pin Wrench Flat Wrench 7/16" (11mm)	**615 875 1060** **615 504 1550** **615 504 1600** **615 606 5150** **615 502 0640** **615 503 1440** **615 802 0080** **615 801 0030**
CP3109-13A4ES **CP3109-13A4**	1 2 3 4 5 . .	Exhaust hose L= 60" (1.5m) **4" (100mm) Disc Guard** Flange Flange Rear Flange Pin Wrench Flat Wrench 7/16" (11mm)	**615 875 1130** **615 504 1600** **615 606 5150** **615 502 0640** **615 503 1440** **615 802 0080** **615 801 0030**
CP3450-12AA5	1 2 3 4	**5" (125mm) Disc Guard** Rear flange M14 Flange nut M14 Screw lock Flat wrench: **205 048 4230** / Pin wrench: **205 048 6673** / Hex wrench: **895 101 1464**	**615 504 1860** **615 503 1590** **615 502 0770** **615 614 0900**
CP3450-12AC45	1 2 3 4	**4.5" (115mm) Disc Guard** Rear flange 3/8" Flange nut 3/8" Screw lock Flat wrench: **205 048 4230** / Pin wrench: **205 048 5003** / Hex wrech: **895 101 1464**	**615 504 2030** **205 053 3943** **205 053 3973** **615 614 0900**
CP3450-12AB5	1 2 3 4	**5" (125mm) Disc Guard** Rear flange 5/8" Flange nut 5/8" Screw lock	**615 504 1860** **615 503 1600** **615 502 0780** **615 614 0900**
CP3450-12AC4 **CP3450-12AC4R**	1 2	**4" (100mm) Disc Guard** Flange (2) Flat wrench Pin wrench Flat wrench: **205 048 4230** / Pin wrench: **205 048 6673** / Hex wrench: **895 101 1464**	**615 504 1880** **615 606 0430** **205 048 4230** **205 048 5003**

MODEL	DESCRIPTION	PART NO.
CP3450-..	Side handle Exhaust kit	**205 052 4063** **205 054 1503**

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com

UNI-BIS® industry solutions

Accessories

INCLUDED ACCESSORIES

MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-120AA5VK	1	Silencer kit	615 396 1660
CP3650-120AB5VK	2	Vibration-damping side handle	615 576 0660
CP3650-120AH5VK	3	Hose clamp	615 263 0240
CP3650-100AB6VK			

MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-120AA5	.	3/8" air hose nipple for 1/2" (13 mm) ID hose	615 704 0270
CP3650-120AB5	1	Hose clamp	615 263 0240
CP3650-120AA45	2	Exhaust hose	615 875 1130
CP3650-120AB45	3	Side handle	615 576 0380



Type 27-42 and 41 wheel



Flap wheels
with depressed centre wheels

MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-100AB6VK	1	**6" (150 mm) Disc Guard**	615 504 2020
	2	Auto balancer	615 990 1810
	3	Front Flange	615 502 0670
	4	Safety screw	615 614 0760
	.	Pin wrench 1-3/8" (35 mm)	615 802 0100
	.	Hexagon wrench 1/4" A/F (6.35 mm)	615 802 0570



MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-120AA45	1	**4.5" (115 mm) Multi-position guard (AA45)**	615 504 1980
CP3650-120AA5	1	**5" (127 mm) Multi-position guard (AA5)**	615 504 1970
	2	Rear flange	615 503 1340
	3	Front flange	615 502 0660
	4	Safety screw	615 614 0760
	.	Pin wrench 1-3/8" (35 mm)	615 802 0100
	.	Hexagon wrench 1/4" A/F (6.35 mm)	615 802 0570



MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-120AB45	1	**4.5" (115 mm) Multi-position guard (AB45)**	615 504 1980
CP3650-120AB5	1	**5" (127 mm) Multi-position guard (AB5)**	615 504 1970
	2	Rear flange	615 503 1410
	3	Front flange	615 502 0670
	4	Safety screw	615 614 0760
	.	Pin wrench 1-3/8" (35 mm)	615 802 0100
	.	Hexagon wrench 1/4" A/F (6.35 mm)	615 802 0570



MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-120AA5VK	1	**5" (127 mm) Multi-position guard**	615 504 1930
	2	Auto balancer	615 990 1810
	3	Front flange	615 502 0660
	4	Safety screw	615 614 0760
	.	Pin wrench 1-3/8" (6.35 mm)	615 802 0100
	.	Hexagon wrench 1/4" A/F (6.35 mm)	615 802 0570



MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-120AB5VK	1	**5" (127 mm) Multi-position guard**	615 504 1930
	2	Auto balancer	615 990 1810
	3	Front flange	615 502 0670
	4	Safety screw	615 614 0760
	.	Pin wrench 1-3/8" (35 mm)	615 802 0100
	.	Hexagon wrench 1/4" A/F (6.35 mm)	615 802 0570



MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-120AH5K	1	Multi-position guard	615 504 1970
	2	Rear flange	615 503 1240
	3	Front flange	615 502 0620
	4	Safety screw	615 616 1010
	.	Hexagon wrench 6 mm	615 802 0560



UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions

Accessories

INCLUDED ACCESSORIES

MODEL	ITEM	DESCRIPTION	PART NO.
CP3850-...	.	Vibration-damping side handle	615 576 0660
	.	1/2" Air hose nipple, 5/8" (16 mm) ID hose	615 704 0140

MODEL	ITEM	DESCRIPTION	PART NO.
CP3850-85AB7VE	1	7" (180 mm) Disc Guard (AB7VE)	615 504 2115
CP3850-65AB9VE	1	9" (230 mm) Disc Guard (AB9VE)	615 504 2125
	2	Auto balancer	615 990 1810
	3	Front Flange	615 502 0670
	4	Safety screw	615 614 0760
	.	Pin wrench 1-3/8" (35 mm)	615 802 0100
	.	Hexagon wrench	615 802 0560



MODEL	ITEM	DESCRIPTION	PART NO.
CP3850-85AH7VE	1	7" (180 mm) Disc Guard (AH7VE)	615 504 2115
CP3850-65AH9VE	1	9" (230 mm) Disc Guard (AH9VE)	615 504 2125
	2	Auto balancer (AH7VE)	615 990 1940
	3	Rear Flange	615 503 1640
	4	Front Flange	615 502 0850
	.	Pin wrench 1-3/8" (35 mm)	615 802 0100
	.	Hexagon wrench	615 802 0560



MODEL	ITEM	DESCRIPTION	PART NO.
CP3850-77AB7V	1	7" (180 mm) Disc Guard	615 504 2135
CP3850-85AB7V	2	Rear Flange	615 503 1530
	3	Nut 5/8"	615 608 0490
	4	Safety screw	615 614 0340
	.	Hexagon wrench 6 mm	615 802 0560



MODEL	ITEM	DESCRIPTION	PART NO.
CP3850-60AB9V	1	9" (230 mm) Disc Guard	205 055 9613
	2	Rear Flange	615 503 1530
	3	Nut 5/8"	615 608 0490
	4	Safety screw	615 614 0340
	.	Hexagon wrench 6 mm	615 802 0560



MODEL	ITEM	DESCRIPTION	PART NO.
CP3349-...	.	1/2" Air hose nipple, 5/8" (16 mm) ID hose	615 704 0140

MODEL	ITEM	DESCRIPTION	PART NO.
CP3349-SALAVELE	1	9" (230 mm) Disc Guard	615 504 1830
	2	Rear flange	615 503 1030
	3	Nut	615 542 1040
	4	Locknut	615 614 0340
	.	Pin Wrench 1-3/8" (35 mm)	615 802 0100
	.	Flat wrench 1-1/16" (27 mm)	615 801 0770
	.	Hex. key	615 802 0560

MODEL	ITEM	DESCRIPTION	PART NO.
CP3349-SALAVADE	1	7" (180mm) Disc Guard	615 504 1820
	2	Rear flange	615 503 1030
	3	Nut	615 542 1040
	4	Locknut	615 614 0340
	.	Pin Wrench 1-3/8" (35 mm)	615 802 0100
	.	Flat wrench 1-1/16" (27 mm)	615 801 0770
	.	Hex. key	615 802 0560

MODEL	ITEM	DESCRIPTION	PART NO.
CP3349-SALAVETE	1	6" (150mm) Disc Guard	615 504 1810
	2	Rear flange	615 503 1160
	3	Locknut	615 614 0340
	.	Flat wrench 1-1/16" (27 mm)	615 801 0770
	.	Hex. key	615 802 0560



Accessories & Spares

OPTIONAL ACCESSORIES

OTHER ACCESSORIES

MODEL	DESCRIPTION	PART NO.
CP3450-.	Low Vibration handle	615 576 0780
	Exhaust hose adapter	615 730 1870
	Overhose	205 054 7523

MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-..	1	Silencer kit	615 396 1660
	2	Vibration-damping side handle	615 576 0660
	3	Hose clamp	615 263 0240
	4	Clippable silencer	615 396 9570
	5	Reinforced cloth-lined exhaust hose L=30" (0.75mm)	615 875 1160
	6	Grease gun include 24g	615 990 1490
	7	Grease for bevel gear (1kg)	615 990 1480
	..	Blades kit (x100)	615 434 0640



AUTO-BALANCER

MODEL	DESCRIPTION	PART NO.
CP3349-SALAVADE/ CP3349-SALAVELE	Auto-balancer	615 503 1460

COLLET HOLDER

MODEL	DESCRIPTION	PART NO.
CP3450-12AC..	Collet holder	615 990 1900
	Collet nut	615 607 1540
	Collet 1/4"	615 526 0630

MODEL	ITEM	DESCRIPTION	PART NO.
CP3650-..	A	**Dust extraction Kit**	615 397 8300
ø127 (5")	1	Manifold cutting with screws	615 504 2170
Diamond disc	2	Goble cover plate complete	615 504 2180
	3	Spacer 6mm - Hole 14mm	615 643 0920
	3	Spacer 6mm - Hole 16mm	615 643 0910
	4	Spacer for M14 spindle	615 643 0890
	4	Spacer for 5/8" spindle	615 643 0900
	5	Flange nut M14	615 606 0460
	5	Flange nut 5/8"	615 606 0450
	.	Pin key	615 802 0670

GREASE GUN

MODEL	DESCRIPTION	PART NO.
CP3450-..	Grease gun (capacity 0.8 oz - 24g)	615 990 1490

SILENCERS

MODEL	ITEM	DESCRIPTION	PART NO.
CP3019-..	1	Silencer Kit	615 396 1010
	2	Clippable silencer	615 396 1240
CP3109-..	3	Silencer Kit	615 396 1660
	4	Clippable silencer	615 396 6550
CP3450	3	Silencer Kit	615 574 0760



TUNE-UP KITS

MODEL	TUNE-UP KIT
CP9120CR	2050 504 823
CP9122BR	2050 504 823
CP9122CR	2050 504 823
CP9121BR	2050 504 823
CP9121CR	2050 504 823
CP9121AR	2050 504 823
CP9123	2050 503 733
CP3040	205 054 5223
CP854	C138089
CP3109-13A4	2050 541 673
CP3109-13A4ES	2050 541 663
CP3450-..	6153 973 030
CP3650 Series	2050 556 003
CP3850 Motor Service Kit	2050 553 543
CP3850 Spindle Service Kit	2050 553 553
CP3850 Global Service Kit	2050 553 433

EXHAUST HOSE

MODEL	DESCRIPTION	PART NO.
CP3109-..	Reinforced cloth-lined exhaust hose L= 30" (0.75m)	615 875 1160

PAD

MODEL	DESCRIPTION	PART NO.
CP3450-12AC4 AC45	Backing pad ø 4" (100mm) with nut 3/8"	615 990 1900
CP3450-12AA5/ AB5	Backing pad ø 5" (125mm) with nut 5/8" & M14	615 990 1910

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com

UNI-BIS® industry solutions

Accessories

OPTIONAL ACCESSORIES



MODEL	ITEM	DESCRIPTION	PART NO.
CP3850-77ABVE	1	Nut	615 542 1040
CP3850-85ABVE	2	Rear flange balancer	615 503 1460
	3	Safety screw	615 614 0340
	4	Grease gun	615 990 1490
	5	Grease for bevel gear (1kg)	615 990 1480
	.	Pin spanner 1-3/8" (35 mm)	615 802 0100
	.	Flat spanner	615 801 0770
	.	Hexagon wrench 6 mm	615 802 0560



MODEL	ITEM	DESCRIPTION	PART NO.
CP3850-77AB7V CP3850-85AB7V CP3850-60AB9V	1	Wheel adapter	C087920



MODEL	ITEM	DESCRIPTION	PART NO.
CP3850-77AB7V	1	Rear Flange	615 503 1030
CP3850-85AB7V	2	Nut	615 542 1040
CP3850-60AB9V	3	Safety screw	615 614 0340
	.	Pin Spanner 1-3/8" (35 mm)	615 802 0100
	.	Flat spanner	615 801 0770
	.	Hexagon wrench 6 mm	615 802 0560

DIMENSIONS



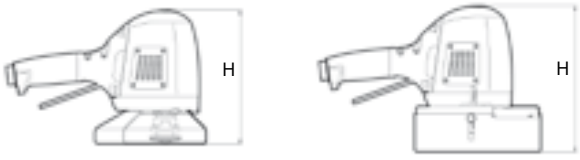

ANGLE GRINDER	L		A		H	
	in	mm	in	mm	in	mm
CP7500D	5.5	140	2.52	64	1.04	26.4
CP3040GABTIM	8.3	210	3.5	90	2.6	65
CP3040GASTIM	10.6	270	3.5	90	2.6	65
CP9120CR	9.3	233	1.58	40	1.02	26
CP9120CRN	9.3	233	1.58	40	1.02	26
CP9122BR	9.3	233	1.58	40	1.02	26
CP9122CR	9.3	233	1.58	40	1.02	26
CP9121CR	9.6	240	1.58	40	1.02	26
CP9121BR	9.6	240	1.58	40	1.02	26
CP9121AR	9.6	240	1.58	40	1.02	26
CP854	9	229	1.58	40	1.02	26
CP854E	9	229	1.58	40	1.02	26
CP3019-..A.	6.4	163	2.68	68	0.59	15
CP3109-..A4	8.5	217	2.68	68	0.59	15
CP3109-..A4ES	11.3	287	2.68	68	0.59	15

ANGLE GRINDER	L		A		H	
	in	mm	in	mm	in	mm
CP3450-12A..	9.1	231			4.6	117
CP3650-..AC4	9.4	238	1.05	26.8	3.5	88
CP3650-..AB/AA..45/5	9.4	238	1.05	26.8	3.4	87
CP3650-..AB/AA..VK	9.4	238	1.05	26.8	3.6	93
CP3650-..AB6..	9.4	238	1.05	26.8	3.7	93
CP9123	13.4	340	1.34	34	5.5	140
CP857	13.1	334	1.34	34	5.5	140
CP3850-77AB7V	13.1	334	1.14	29	4.8	122
CP3850-..AB9V	13.1	334	1.14	29	4.8	122
CP3850-..AB7VE/AH7VE	13.1	334	1.14	29	4.2	107
CP3850-..AB9VE/AH9VE	13.1	334	1.14	29	4.2	107
CP3349-SALAVADE					7.5	189
CP3349-SALAVELE					7.5	189
CP3349-SALAVETE					8.2	207

UNI-BIS Group
Dystrybutor
ul. Osiedle Leśne 1a
84-300 Lębork, Polska
tel./fax: +48 59 863 14 17
e-mail: biuro@uni-bis.com
www.uni-bis.com
UNI-BIS industry solutions