




Aluminium [AlMg2,5]
Polerowany



Stal
Ocynek

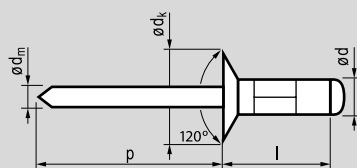

UNIGRIP | multigrip | kołnierz wpuszczany

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	8,0	1,5-5,0	AA10043208	6,0 [+/-0,24]	-	~1,78	≥27	980	680
[+0,05/-0,13]	9,7	2,5-6,5	3209						
	10,0	2,5-7,0	3210						
Ø 3,3 [3,5 max]	12,0	4,5-9,0	3212						
4,0	8,0	1,5-4,5	AA10044008	8,0 [+/-0,29]	-	~2,18	≥27	1.600	1.150
[+0,05/-0,13]	10,0	1,5-6,5	4010						
	11,3	2,5-7,5	4011						
Ø 4,1 [4,3 max]	12,0	3,5-8,5	4012						
	14,0	5,5-10,5	4014						
4,8	10,0	1,5-5,0	AA10044810	9,5 [+/-0,29]	-	~2,78	≥27	2.350	1.500
[+0,05/-0,13]	12,0	2,0-7,0	4812						
	14,0	4,0-9,0	4814						
Ø 4,9 [5,2 max]	16,0	6,0-11,0	4816						
	16,9	7,0-12,0	4817						

W ofercie nity o niestandardowych wymiarach.