




Aluminium [AlMg2,5/3,5]

Polerowany



Stal

O cynk



Otwarte | kołnierz standardowy

Ø d	$\begin{matrix} l \\ [+1/-0,2] \end{matrix}$		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
2,4	4,0	~2,0	AA10312404	5,0 [+0/-0,7]	0,7 [+/-0,15]	~1,45	≥27	355	315
[+0,08/-0,10]	6,0	2,0-4,0	2406						
	8,0	4,0-6,0	2408						
Ø 2,5	10,0	6,0-8,0	2410						
3,0	4,0	~1,5	AA10313004	6,5 [+0/-0,7]	0,8 [+/-0,2]	~1,75	≥27	810	620
[+0,08/-0,10]	6,0	1,5-3,5	3006						
	8,0	3,5-5,5	3008						
Ø 3,1	10,0	5,5-7,5	3010						
	12,0	7,5-9,5	3012						
	14,0	9,5-11,5	3014						
	16,0	11,5-13,5	3016						
3,2	4,0	~1,5	AA10313204	6,5 [+0/-0,7]	0,8 [+/-0,2]	~1,75	≥27	980	760
[+0,08/-0,10]	6,0	1,5-3,5	3206						
	8,0	3,5-5,5	3208						
Ø 3,3	10,0	5,5-7,5	3210						
	12,0	7,5-9,5	3212						
	14,0	9,5-11,5	3214						
	16,0	11,5-13,5	3216						
	18,0	13,5-15,5	3218						
	20,0	15,5-17,5	3220						
4,0	6,0	1,5-3,0	AA10314006	8,0 [+0/-1,0]	1,0 [+/-0,3]	~2,10	≥27	1.600	1.200
[+0,08/-0,15]	8,0	3,0-5,0	4008						
	10,0	5,0-6,5	4010						
Ø 4,1	12,0	6,5-8,5	4012						
	14,0	8,5-10,5	4014						
	16,0	10,5-12,5	4016						
	18,0	12,5-14,5	4018						
	20,0	14,5-16,5	4020						
	23,0	16,5-19,0	4023						
	25,0	19,0-21,5	4025						

W ofercie nity o niestandardowych wymiarach.

Nity



AA1031




Aluminium [AlMg2,5/3,5]

Polerowany



Stal

Ocynk



Otwarte | kołnierz standardowy

Ø d	l [+1/-0,2]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
4,8	6,0	1,0-3,0	AA10314806	9,5 [+0/-1,0]	1,1 [+/- 0,3]	~2,70	≥27	2.230	1.690
[+0,08/-0,15]	8,0	3,0-4,5	4808						
	10,0	4,5-6,0	4810						
Ø 4,9	12,0	6,0-8,0	4812						
	14,0	8,0-10,0	4814						
	16,0	10,0-12,0	4816						
	18,0	12,0-14,0	4818						
	20,0	14,0-16,0	4820						
	22,0	16,0-18,0	4822						
	25,0	18,0-21,0	4825						
	28,0	21,0-23,5	4828						
	30,0	23,5-25,0	4830						
	35,0	25,0-30,0	4835						
	40,0	30,0-35,0	4840						
5,0	6,0	1,0-3,0	AA10315006	9,5 [+0/-1,0]	1,1 [+/- 0,3]	~2,70	≥27	2.500	2.000
[+0,08/-0,15]	8,0	3,0-4,5	5008						
	10,0	4,5-6,0	5010						
Ø 5,1	12,0	6,0-8,0	5012						
	14,0	8,0-10,0	5014						
	16,0	10,0-12,0	5016						
	18,0	12,0-14,0	5018						
	21,0	14,0-17,0	5021						
	25,0	17,0-20,0	5025						
	27,0	20,0-23,0	5027						
	30,0	23,0-25,0	5030						
	35,0	25,0-30,0	5035						
	40,0	30,0-35,0	5040						

W ofercie nity o niestandardowych wymiarach.




Aluminium [AlMg2,5/3,5]

Polerowany



Stal

Ocynk

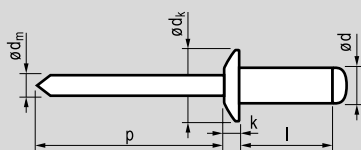

Otwarte | kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
6,0	8,0	2,0-4,0	AA10316008	12,0 [+0/-1,5]	1,5 [+/- 0,4]	~3,60	≥31	3.900	3.000
[+0,08/-0,15]	10,0	4,0-6,0	6010						
	12,0	6,0-8,0	6012						
Ø 6,1	14,0	7,0-9,0	6014						
	16,0	9,0-11,0	6016						
	18,0	11,0-13,0	6018						
	22,0	13,0-17,0	6022						
	26,0	17,0-20,0	6026						
	30,0	20,0-24,0	6030						
6,4	10,0	0,0-2,5	AA10316410	13,0 [+0/-1,5]	1,8 [+/- 0,4]	~3,85	≥31	4.090	3.120
[+0,08/-0,15]	12,0	4,0-6,0	6412						
	15,0	6,0-9,0	6415						
Ø 6,5	18,0	9,0-13,0	6418						
	22,0	13,0-16,0	6422						
	26,0	16,0-20,0	6426						
	30,0	18,0-24,0	6430						

W ofercie nity o niestandardowych wymiarach.