





Aluminium [AlMg3,5]

Polerowany



Stal

O cynk

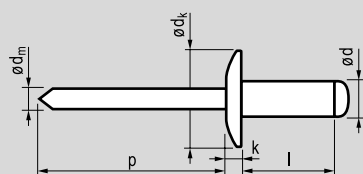

Otwarte | kołnierz powiększony

Ø d	l [+1/-0,2]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	6,0	1,5-3,5	AA10323206	9,5 [+0/-0,5]	≤2,0	~1,70	≥27	980	760
[+0,08/-0,10]	8,0	3,5-5,5	3208						
	10,0	5,5-7,5	3210						
Ø 3,3	12,0	7,5-9,5	3212						
	14,0	9,5-11,5	3214						
4,0	6,0	1,5-3,0	AA10324006	12,0 [+0/-0,5]	≤2,5	~2,10	≥27	1.600	1.200
[+0,08/-0,15]	8,0	3,0-5,0	4008						
	10,0	5,0-6,5	4010						
Ø 4,1	12,0	6,5-8,5	4012						
	14,0	8,5-10,5	4014						
	16,0	10,5-12,5	4016						
4,8	8,0	3,0-4,5	AA10324808	14,0 [+0/-0,5]	≤2,5	~2,70	≥27	2.230	1.690
[+0,08/-0,15]	10,0	4,5-6,0	4810						
	12,0	6,0-8,0	4812						
Ø 4,9	14,0	8,0-10,0	4814						
	16,0	10,0-12,0	4816						
	18,0	12,0-14,0	4818						
	20,0	14,0-16,0	4820						
	22,0	16,0-18,0	4822						
	24,0	18,0-21,0	4824						
	26,0	19,5-22,0	4826						
	28,0	21,0-23,5	4828						
	30,0	23,0-25,0	4830						
	35,0	25,0-30,0	4835						
5,0	8,0	3,0-4,5	AA10325008	14,0 [+0/-0,5]	≤2,5	~2,70	≥27	2.500	2.000
[+0,08/-0,15]	10,0	4,5-6,0	5010						
	12,0	6,0-8,0	5012						
Ø 5,1	14,0	8,0-10,0	5014						
	16,0	10,0-12,0	5016						
	18,0	12,0-14,0	5018						
	21,0	14,0-17,0	5021						
	24,0	17,0-20,0	5024						