



AA1034




Aluminium [AlMg2,5/3,5]

Polerowany



Stal

Ocynk

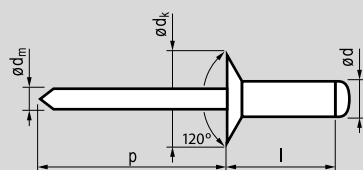

Otwarte | kołnierz wpuszczany

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
2,4	6,0	2,0-4,0	AA10342406	5,0 [+0/-0,4]	-	~1,45	≥27	355	315
[+0,08/-0,10]	8,0	4,0-6,0	2408						
Ø 2,5	10,0	6,0-8,0	2410						
3,0	6,0	1,5-3,5	AA10343006	6,0 [+0/-0,4]	-	~1,75	≥27	810	620
[+0,08/-0,10]	8,0	3,5-5,5	3008						
Ø 3,1	10,0	5,5-7,5	3010						
	12,0	7,5-9,5	3012						
3,2	6,0	1,5-3,5	AA10343206	6,0 [+0/-0,4]	-	~1,75	≥27	980	760
[+0,08/-0,10]	8,0	3,5-5,5	3208						
Ø 3,3	10,0	5,5-7,5	3210						
	12,0	7,5-9,5	3212						
	14,0	9,5-11,5	3214						
4,0	6,0	1,5-3,0	AA10344006	7,5 [+0/-0,5]	-	~2,10	≥27	1.600	1.200
[+0,08/-0,15]	8,0	3,0-5,0	4008						
Ø 4,1	10,0	5,0-6,5	4010						
	12,0	6,5-8,6	4012						
	14,0	8,5-10,5	4014						
	16,0	10,5-12,5	4016						
4,8	8,0	3,0-4,5	AA10344808	9,0 [+0/-0,5]	-	~2,70	≥27	2.230	1.690
[+0,08/-0,15]	10,0	4,5-6,0	4810						
Ø 4,9	12,0	6,0-8,0	4812						
	14,0	8,0-10,0	4814						
	16,0	10,0-12,0	4816						
	18,0	12,0-14,0	4818						
	20,0	14,0-16,0	4820						
	25,0	18,0-21,0	4825						
5,0	8,0	3,0-4,5	AA10345008	9,0 [+0/-0,5]	-	~2,70	≥27	2.500	2.000
[+0,08/-0,15]	10,0	4,5-6,0	5010						
Ø 5,1	12,0	6,0-8,0	5012						
	14,0	8,0-10,0	5014						
	16,0	10,0-12,0	5016						
	18,0	12,0-14,0	5018						
	21,0	14,0-17,0	5020						
	25,0	17,0-20,0	5025						

Nity