



AA1035





Aluminium [AlMg3,5]

Polerowany



Stal

Ocynk

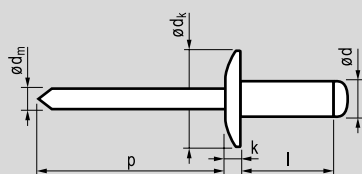

Otwarte | kołnierz powiększony

Ø d	^l [+1/-0,2]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
4,8	8,0	2,0-4,5	AA10354808	11,0 [+0/-1]	≤1,8	~2,8	≥27	2230	1540
[+0,08/-0,15]	10,0	3,5-7,0	4810						
	12,0	5,0-8,5	4812						
Ø 4,9	14,0	7,0-10,0	4814						
	16,0	8,5-11,5	4816						
	18,0	10,0-12,5	4818						
	20,0	12,5-16,0	4820						
5,0	8,0	2,0-4,5	AA10355008	11,0 [+0/-1]	≤1,8	~2,8	≥27	2400	1600
[+0,08/-0,15]	10,0	3,5-7,0	5010						
	12,0	5,0-8,5	5012						
Ø 5,1	14,0	7,0-10,0	5014						
	16,0	8,5-11,5	5016						
	18,0	10,0-12,5	5018						
	20,0	12,5-15,0	5020						
	25,0	14,5-20,5	5025						
	30,0	19,5-25,0	5030						

W ofercie nity o niestandardowych wymiarach.