


**Aluminium** [AlMg5]

Polerowany

**Stal**

Zawiera fosforany

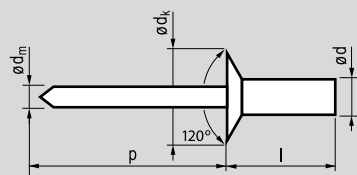

Szczelne | kołnierz wpuszczany

Ø d	l [+1/-0,2]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	7,5	1,5-3,5	AA12043207	6,0 [+0/-0,4]	-	~1,70	≥27	1.245	1.070
[+/-0,08]	9,0	3,0-5,0	3209						
 Ø 3,3	10,5	4,5-6,5	3210						
4,0	9,5	3,0-5,0	AA12044009	7,5 [+0/-0,5]	-	~2,20	≥27	2.240	1.710
[+/-0,08]	11,0	4,5-6,5	4011						
 Ø 4,1	12,5	6,0-8,0	4012						
4,8	9,5	2,5-4,5	AA12044809	9,0 [+0/-0,5]	-	~2,65	≥27	3.070	2.230
[+/-0,08]	11,0	4,0-6,0	4811						
	12,5	5,5-7,5	4812						
Ø 4,9	14,0	7,0-9,0	4814						
	15,5	8,5-10,5	4815						
	19,0	12,0-14,0	4819						

W ofercie nity o niestandardowych wymiarach.