




Aluminium [AlMg5]

Polerowany



Stal nierdzewna [A2]

Polerowany

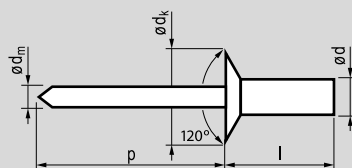

Szczelne | kołnierz wpuszczany

Ø d	l [+1/-0,2]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	9,0	3,0-5,0	AA12343209	6,0 [+0/-0,4]	-	~1,70	≥27	1.245	1.070
[+/-0,08] Ø 3,3									
4,0	9,5	3,0-5,0	AA12344009	7,5 [+0/-0,5]	-	~2,20	≥27	2.240	1.710
[+/-0,08] Ø 4,1	11,0	4,5-6,5	4011						
4,8	11,0	4,0-6,0	AA12344811	9,0 [+0/-0,5]	-	~2,63	≥27	3.070	2.230
[+/-0,08]	14,0	7,0-9,0	4814						
 Ø 4,9	18,0	11,0-13,0	4818						

W ofercie nity o niestandardowych wymiarach.