




Aluminium [AlMg3,5]

Polerowany



Stal

Ocynk

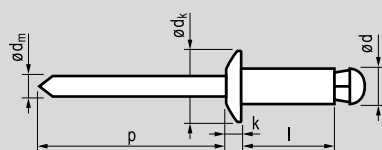

Rozwidlony | kołnierz standardowy

Ø d	l [+0,3/-0,2]		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	8,0	0,5-1,0	AA13013208	6,5 [+/-0,2]	1,0 [+/-0,1]	~1,80	≥27	750	820
[+/-0,15]	10,0	1,0-3,0	3210						
	12,0	3,0-5,0	3212						
Ø [3,7 max]	16,0	7,0-9,0	3216						
	18,0	9,0-11,0	3218						
4,0	10,0	1,5-5,0	AA13014010	8,0 [+/-0,4]	1,2 [+/-0,2]	~2,10	≥27	1.140	1.280
[+/-0,15]	12,0	4,0-6,5	4012						
	14,0	6,0-9,0	4014						
Ø [4,5 max]	16,0	8,0-11,0	4016						
	18,0	10,0-13,0	4018						
	20,0	12,0-15,0	4020						
4,8	10,0	1,5-4,0	AA13014810	9,0 [+/-0,4]	1,4 [+/-0,2]	~2,70	≥27	2.450	2.100
[+/-0,15]	12,0	2,0-6,0	4812						
	14,0	4,0-8,0	4814						
Ø [5,3 max]	16,0	6,0-10,0	4816						
	18,0	8,0-12,0	4818						
	20,0	10,0-14,0	4820						
	22,0	12,0-16,0	4822						
	25,0	16,0-19,0	4825						
	30,0	19,0-24,0	4830						
	35,0	24,0-29,0	4835						
	40,0	29,0-34,0	4840						

W ofercie nity o niestandardowych wymiarach.