


Sealed lever latch
90mm size

- For lock core selection and a complete overview of the *SOUTHCO*® Key-Choice System see page 190

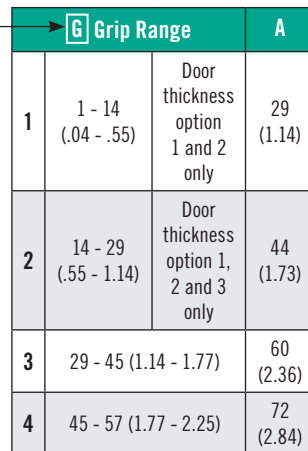

UNI-BIS
INDUSTRY SOLUTIONS




C5 Compression Latch

Sealed lever latch

71mm size



137

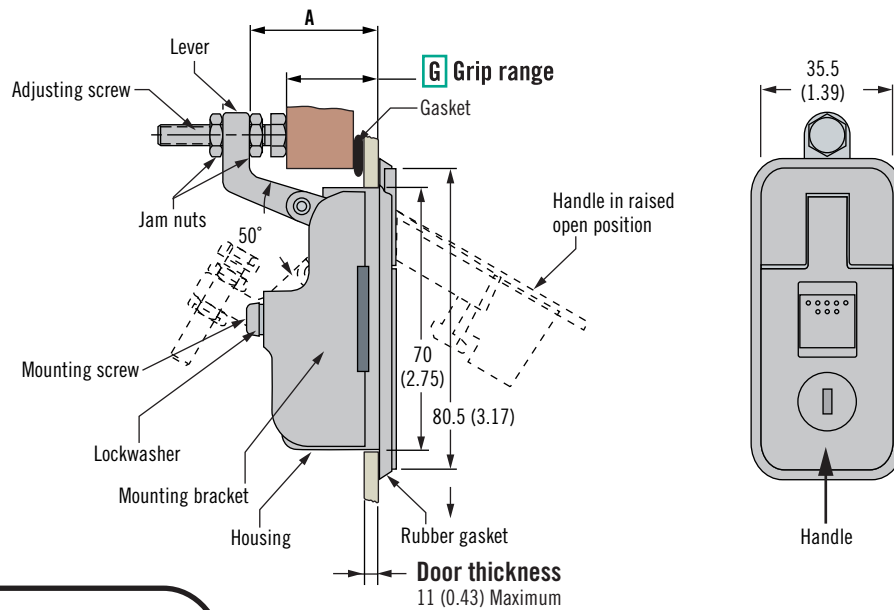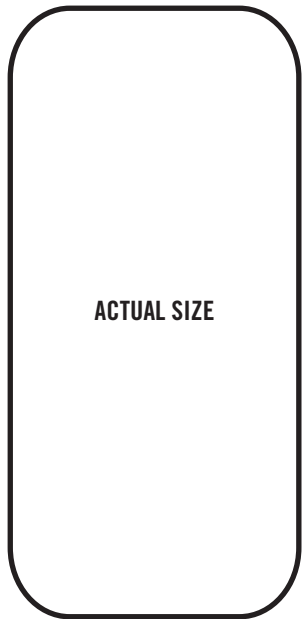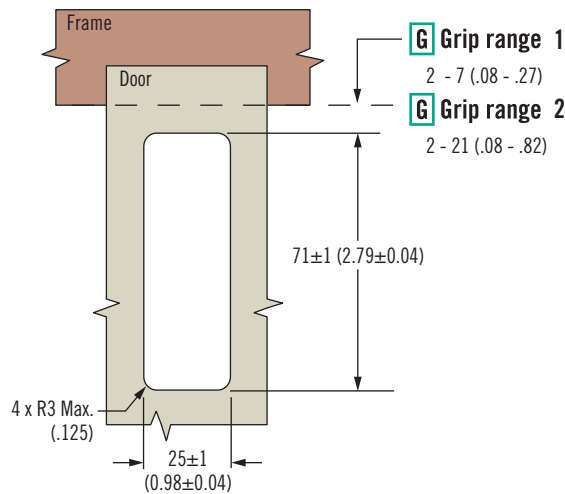

- Low profile when latched
- Easy grip adjustment
- Push button actuation

Material and Finish

Zinc alloy, powder coated and steel, zinc plated

Performance Details

Maximum static load:

Grip 1 - 25 (.04 - .98):

290 N (65 lbf)

Grip 15 - 30 (.59 - 1.18):

170 N (40 lbf)

Sealing Notes

Environmental sealing is achieved by sealing the mounting screw threads

Keys

See page 121

Part Number Selection

See table

C5 - M - L 1 - G F

F Finish

5 Black powder coated

12 Chrome plated

L Lock style

1 Non-locking

3 Key-locking with dust shutter, keyed alike CH751 (two flat keys supplied)

G Grip Range

1

1 - 25 (.04 - .98)

36.5 (1.44)

2

15 - 30 (.59 - 1.18)

40.0 (1.57)

Dimensions in millimeters (inch) unless otherwise stated