


EM-05 Miniature Electronic Keeper

Electronic access

southco[®]
CONNECT · CREATE · INNOVATE

- **Simple transition from mechanical to electronic access**
- **“Push-to-close” convenience for any application – retrofit or new installation**
- **Front mount and side mount versions**
- **Concealed latching**
- **Microprocessor controlled gear motor**
- **Minimal power draw**
- **Simple mechanical override**
- **Optional internal microswitch for latch open/close output signal**
- **Wide operating voltage range (8-26 VDC)**
- **Accepts signals from any electronic actuation source**
- **Single or multi-point latching**
- **Works with a variety of door mounted mechanical latches**

The EM-05 Miniature Electronic Keeper provides a simple, versatile electromechanical latch solution for a variety of applications. Add a 12-24 Volt DC power supply and any access control device to the EM-05 for a secure, concealed electronic access solution. The optional internal microswitch provides an output signal to remotely monitor latch status or control external systems.

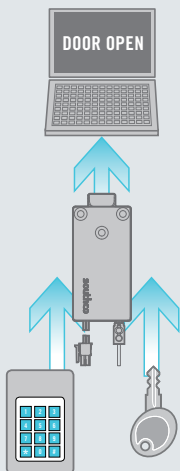

Front mount configuration for low profile applications.

Alternate latch bolt configuration for side mount applications.

Convenient mechanical override feature for manual release in case of power failure. Contact Southco for manual release cables.






EM-05 Miniature Electronic Keeper




Electronic access



Side Mount




Front Mount

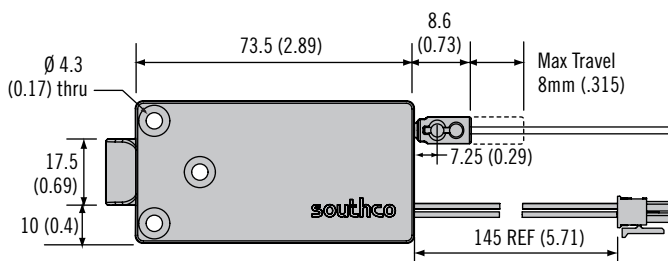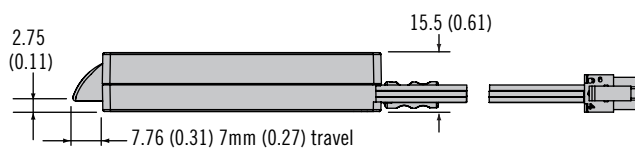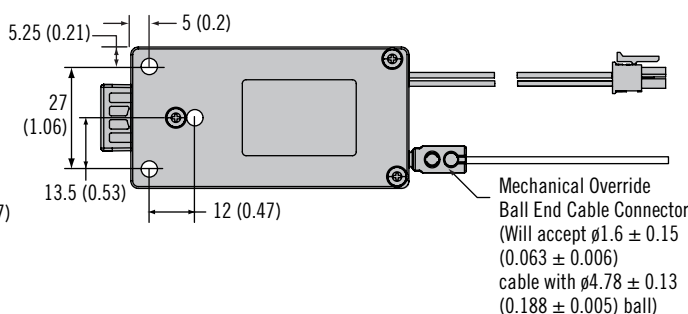

Latch Connector

Molex Microfit 3.0 series



Material & Finish

Enclosure & Latch Bolt:
Thermoplastic
Housing Assembly Screws:
Steel, Zinc Plate

Electrical Specifications

Recommended Operating Voltage:
12 - 24 VDC

Typical Operating Current:
Less than 600mA at 12 VDC

Control Input

Retracted Position: 12-24 VDC
The latch bolt will remain retracted
for as long as the signal is present
or a minimum of 1 second.

Input Signal Current: 25mA Max at
24 VDC

Extended Position: 0 VDC

Wire Color Code / Connector Pin Assignment:

PIN 1 Brown: Ground (-)
PIN 2 Red: Power 8 to 26 VDC
PIN 3 Orange: Control Signal 8 to
26 VDC
PIN 4 Black: Microswitch Common
PIN 5 Blue: Microswitch N.O.
Contact
PIN 6: None

MINIATURE ELECTRONIC KEEPER PART NUMBERS

Type	With Mechanical Override		Without Mechanical Override	
	With Switch	Without Switch	With Switch	Without Switch
Front Mount Latch Bolt	EM-05-11-111	EM-05-11-101*	EM-05-11-110	EM-05-11-100
Side Mount Latch Bolt	EM-05-21-111	EM-05-21-101*	EM-05-21-110	EM-05-21-100

* For Mechanical Version of Front Mount Style order part number EM-05-11-001

* For Mechanical Version of Side Mount Style order part number EM-05-21-001
(Mechanical version does not include drive motor or electronics)

southco
CONNECT · CREATE · INNOVATE