




| English                 | Français                    | Deutsch           | Italiano                   | Español             |
|-------------------------|-----------------------------|-------------------|----------------------------|---------------------|
| Protruding head         | Tête bombée                 | Flachrundkopf     | Testa tonda                | Cabeza alomada      |
| Body: Aluminium alloy*  | Corps: Alliage d'aluminium* | Hülse: Aluminium* | Corpo: Lega di alluminio*  | Cuerpo: Aluminio*   |
| Wax lubricated          | Lubrifié                    | Gewachst          | Lubrificato                | Lubricado           |
| Stem: Aluminium alloy** | Tige: Alliage d'aluminium** | Dorn: Aluminium** | Gambo: Lega di alluminio** | Vástago: Aluminio** |
| Wax lubricated          | Lubrifié                    | Gewachst          | Lubrificato                | Lubricado           |

\*: 5056 \*\*: 7075

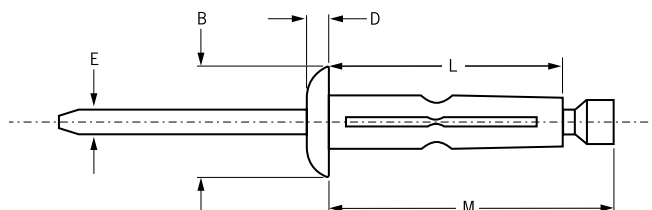

| ø              |  |       |  |      | M     | øB    | D    | L     | øE   |  |  | Part No/ref  |
|----------------|------------------------------------------------------------------------------------|-------|------------------------------------------------------------------------------------|------|-------|-------|------|-------|------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------|
| nom.           | min.                                                                               | max.  | min.                                                                               | max. | max.  | ± 0.4 | ref. | max.  | ref. | kN <sup>1)</sup>                                                                    | kN <sup>1)</sup>                                                                     |              |
| 4.8<br>(3/16") | 1.27                                                                               | 6.35  | 5.18                                                                               | 5.31 | 26.42 | 11.30 | 2.24 | 22.61 | 2.62 | 3.11                                                                                | 2.00                                                                                 | BAPKTR-06-04 |
|                | 4.75                                                                               | 9.53  |                                                                                    |      | 28.70 |       |      | 25.02 |      |                                                                                     |                                                                                      | BAPKTR-06-06 |
|                | 9.53                                                                               | 14.27 |                                                                                    |      | 31.75 |       |      | 28.45 |      |                                                                                     |                                                                                      | BAPKTR-06-09 |
|                | 14.27                                                                              | 19.05 |                                                                                    |      | 36.57 |       |      | 33.02 |      |                                                                                     |                                                                                      | BAPKTR-06-12 |
| 6.4<br>(1/4")  | 1.52                                                                               | 6.35  | 6.40                                                                               | 6.65 | 33.02 | 14.22 | 2.87 | 23.50 | 3.45 | 5.56                                                                                | 3.11                                                                                 | BAPKTR-08-04 |
|                | 4.75                                                                               | 9.53  |                                                                                    |      | 36.07 |       |      | 26.67 |      |                                                                                     |                                                                                      | BAPKTR-08-06 |

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos

#### Note:

External stem locking feature requires special nose piece. / Le verrouillage extérieur de la tige nécessite d'un nez spécial. / Die Restdornverriegelung erfordert ein spezielles Mundstück. / Funzione di bloccaggio esterno del gambo richiede particolare nasello. / El bloqueo mecánico del vástago requiere de una sufridera especial.

#### Option:

A synthetic rubber washer can be ordered to fit under protruding head fasteners e.g.: BAPKTR-06W-06

Une rondelle en caoutchouc disposée sous la tête peut être commandée ex : BAPKTR-06W-06

Flachrundkopf mit Unterkopf-Gummidichtung ist ebenfalls verfügbar, z.B. BAPKTR-06W-06

Testa tonda con una guarnizione di gomma e disponibile, p. e. BAPKTR-06W-06

Para el sellado de la cabeza hay una version con junta de goma sintética, p.ej: BAPKTR-06W-06