


## Aluminium

Countersunk head  
Round shank  
Closed

**UFX**

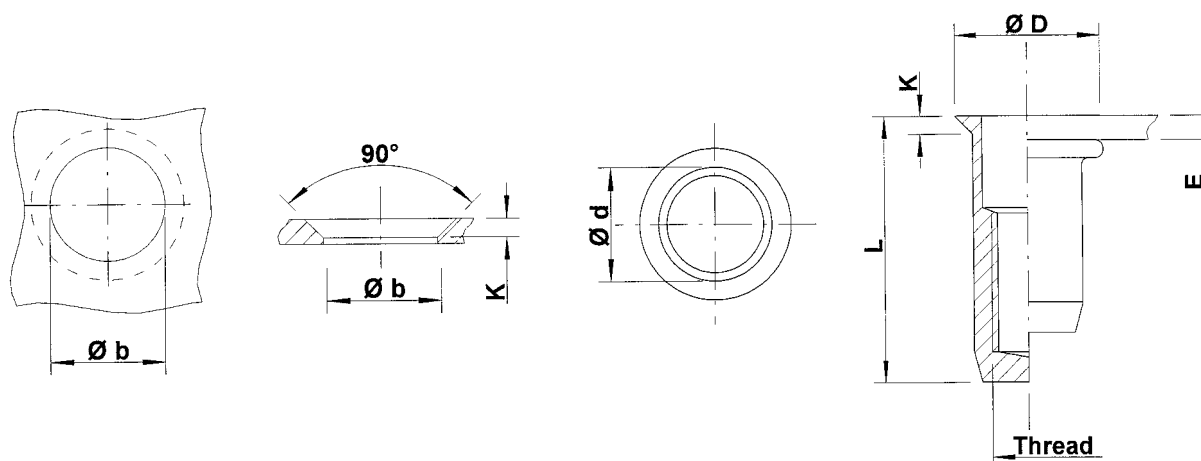

| THREAD | TYPE  | E<br>= grip | L    | b <sup>+0,1</sup><br>= drill<br>dia | d<br>= shank<br>dia | D    | K   | kg/1000 | ORDER<br>CODE |
|--------|-------|-------------|------|-------------------------------------|---------------------|------|-----|---------|---------------|
| M4     | UFX35 | 1,7-3,5     | 15,5 | 6,0                                 | 6,0                 | 9,0  | 1,5 | 0,7     | 514 450*      |
|        | UFX50 | 3,5-5,0     | 17,0 |                                     |                     |      |     | 0,7     | 514 475*      |
| M5     | UFX40 | 1,7-4,0     | 18,0 | 7,0                                 | 7,0                 | 10,0 | 1,5 | 1,0     | 515 375*      |
|        | UFX65 | 4,0-6,5     | 20,5 |                                     |                     |      |     | 1,1     | 515 400*      |
| M6     | UFX45 | 1,7-4,5     | 22,0 | 9,0                                 | 9,0                 | 12,0 | 1,5 | 2,1     | 516 400*      |
|        | UFX65 | 4,5-6,5     | 24,0 |                                     |                     |      |     | 2,3     | 516 425*      |
| M8     | UFX45 | 1,7-4,5     | 25,0 | 11,0                                | 11,0                | 14,0 | 1,5 | 3,3     | 518 325*      |
|        | UFX65 | 4,5-6,5     | 28,0 |                                     |                     |      |     | 3,7     | 518 350*      |

\* Minimum order quantity required after depletion of stock

All dimensions in mm

Technical data subject to modification