




Stal nierdzewna [A2]
Polerowany



Półsześciokątne otwarte | kołnierz cylindryczny

Ø d	l [+0/-1,3]		Indeks nr	Ø dk [+0,2/-0,3]	k ≤	SW [+0/-0,12]			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M4 SW1 6,1	13,0	0,5-3,0	BS04IOCP25	9,5	1,1	6,0	12,0	10.190	2.950
M5 SW1 7,1	14,5	0,5-3,0	BS05IOCP30	10,5	1,1	7,0	14,0	12.740	3.430
M6 SW1 9,1	17,0	0,5-3,0	BS06IOCP30	12,5	1,6	9,0	26,0	21.560	4.700
M8 SW1 11,1	19,0	0,5-3,0	BS08IOCP30	14,5	1,6	11,0	39,0	37.420	6.860
M10 SW1 13,1	24,0	0,8-4,0	BS10IOCP40	16,5	2,1	13,0	45,0	63.700	7.840

W ofercie nitonakrętki o niestandardowych wymiarach.

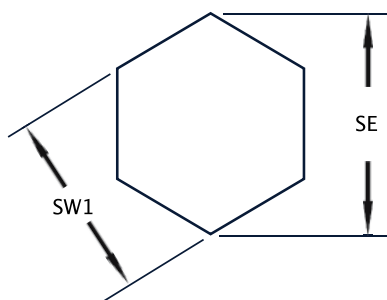

SW: Wymiar zewnętrzny nitonakrętki bok do boku

SW1: Wymiar wewnętrzny nitonakrętki bok do boku

SE: Wymiar wewnętrzny nitonakrętki wierzchołek do wierzchołka