



Stal


Ocynk



Półsześciokątne otwarte | kołnierz cylindryczny

$\varnothing d$	l		Indeks nr	$\varnothing d_k$	$k \leq$	SW			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M4	10,5	0,3-2,0	BS04SOCP20	9,0	0,8	5,9	3,0	6.800	2.200
 SW1 6,0									
M5	13,0	0,7-3,0	BS05SOCP30	10,0	1,0	6,9	6,0	10.000	3.300
 SW1 7,0									
M6	16,0	0,5-3,0	BS06SOCP30	13,0	1,5	8,9	10,0	15.000	4.400
 SW1 9,0									
M8	17,0	0,5-3,5	BS08SOCP35	16,0	1,5	10,9	24,0	27.000	5.200
 SW1 11,0									

W ofercie nitonakrętki o niestandardowych wymiarach.

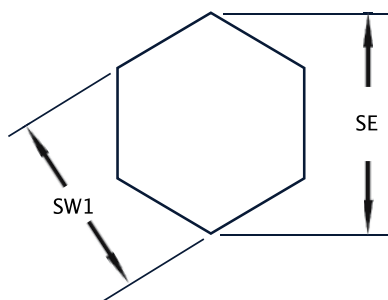

SW: Wymiar zewnętrzny nitonakrętki bok do boku

SW1: Wymiar wewnętrzny nitonakrętki bok do boku

SE: Wymiar wewnętrzny nitonakrętki wierzchołek do wierzchołka