



Stal


O cynk



Półsześciokątne otwarte | kołnierz cylindryczny

$\varnothing d$	l [+/-0,2]		Indeks nr	$\varnothing d_k$ [+0,3/-0,5]	$k \leq$	SW [+0/-0,2]			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M4  SW1 6,1	13,0	0,5-3,0	BS04SOCP130	9,5	1,1	6,0	5,0	4.900	1.400
M5  SW1 7,1	14,5	0,5-3,0	BS05SOCP130	10,5	1,1	7,0	7,0	8.800	1.900
M6  SW1 9,1	17,0	0,5-3,0	BS06SOCP130	12,5	1,6	9,0	14,0	16.600	2.900
M8  SW1 11,1	19,0	0,5-3,0	BS08SOCP130	14,5	1,6	11,0	22,0	21.500	3.000
M10  SW1 13,1	24,0	0,8-4,0	BS10SOCP140	16,5	2,1	13,0	35,0	29.400	3.400

W ofercie nitonakrętki o niestandardowych wymiarach.

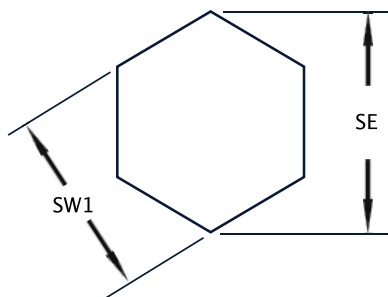

SW: Wymiar zewnętrzny nitonakrętki bok do boku

SW1: Wymiar wewnętrzny nitonakrętki bok do boku

SE: Wymiar wewnętrzny nitonakrętki wierzchołek do wierzchołka