





Stal


Ocynk



Półsześciokątne otwarte | kołnierz wpuszczany mini

Ø d	l [+0,5/-0]		Indeks nr	Ø dk [+0/-0,6]	k ≤	SW [+0/-0,2]			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M3  SW1 5,1	10,5	0,5-2,5	BS03SOMP25	6,5	0,8	5,0	3,0	2.900	900
M4  SW1 6,1	12,5	0,5-3,0	BS04SOMP30	7,0	0,8	6,0	5,0	3.530	1.470
M5  SW1 7,1	14,0	0,5-3,0	BS05SOMP30	8,0	0,8	7,0	7,0	4.900	1.760
M6  SW1 9,1	16,0	0,5-3,0	BS06SOMP30	10,0	0,8	9,0	14,0	14.700	2.940
M8  SW1 11,1	17,0	0,5-3,0	BS08SOMP30	12,0	0,8	11,0	21,0	21.560	3.020
M10  SW1 13,1	20,5	0,8-4,0	BS10SOMP40	14,5	0,8	13,0	35,0	29.400	3.430

W ofercie nitonakrętki o niestandardowych wymiarach.

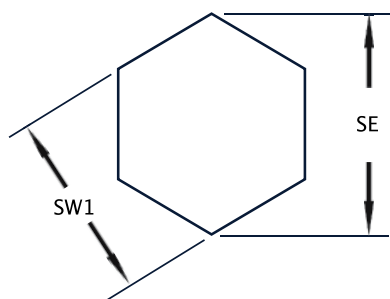

SW: Wymiar zewnętrzny nitonakrętki bok do boku

SW1: Wymiar wewnętrzny nitonakrętki bok do boku

SE: Wymiar wewnętrzny nitonakrętki wierzchołek do wierzchołka