



DK DKA



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Aluminium Clear protective coating	Aluminium Couche protectrice claire	Aluminium Klare Schutzschicht	Aluminium Strato protezione chiaro	Aluminium Capa protectora clara

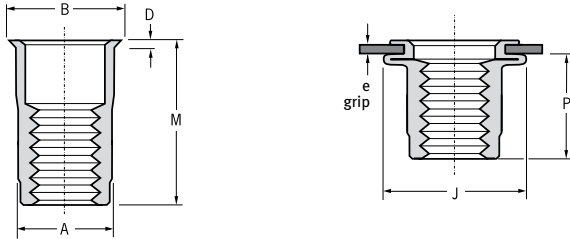

Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +0.15/-0	A	B	D	J	M	P	Part No/ref
	min.	max.		max.	±0.25	±0.05	max.	±0.38	max.	
M4 x 0.7 6H	0.5	2.0	6.75	6.73	7.87	0.48	9.91	10.67	7.75	DKA-470-2.0
	2.0	3.3						11.94		
M5 x 0.8 6H	0.5	3.3	7.60	7.52	8.64		11.43	12.07	8.00	DKA-580-3.3
	3.3	5.7						14.86		
M6 x 1.0 6H	0.7	4.2	10.00	9.91	11.56	0.55	13.97	14.73	9.65	DKA-610-4.2
	4.2	6.6						17.27		
M8 x 1.25 6H	0.7	3.8	13.50	13.46	15.11		18.80	17.53	11.94	DKA-8125-3.8
	3.8	7.9						20.45		
M10 x 1.5 6H	0.7	3.8				20.45	17.53	DKA-1015-3.8		
	3.8	7.9								


all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros


DK DKS







For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

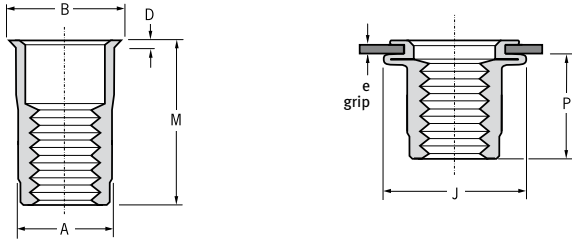

Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +0.15/-0	A	B	D	J	M	P	Part No/ref
	min.	max.		max.	±0.25	±0.05	max.	±0.38	max.	
M4 x 0.7 6H	0.5	2.0	6.75	6.73	7.87	0.48	9.91	10.67	7.75	DKS-470-2.0
	2.0	3.3						11.94		DKS-470-3.3
M5 x 0.8 6H	0.5	3.3	7.60	7.52	8.64		11.43	12.07	8.00	DKS-580-3.3
	3.3	5.7						14.86		DKS-580-5.7
M6 x 1.0 6H	0.7	4.2	10.00	9.91	11.56	0.55	13.97	14.73	9.65	DKS-610-4.2
	4.2	6.6						17.27		DKS-610-6.6
M8 x 1.25 6H	0.7	3.8	13.50	13.46	15.11		18.80	17.53	11.94	DKS-8125-3.8
	3.8	7.9						20.45		DKS-8125-7.9
M10 x 1.5 6H	0.7	3.8				17.53	20.45	DKS-1015-3.8		
	3.8	7.9								20.45

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros


Thread / filetage / Gewinde / filetto / rosca	 Recommended max torque	 Pull-out	 Torque-to-turn	 Push-out
	Nm	kN	Nm	kN
M4 x 0.7 6H	6.2	2.3	1.1	0.8
M5 x 0.8 6H	10.7	2.8	1.4	1.5
M6 x 1.0 6H	18.1	3.0	1.4	1.4
M8 x 1.25 6H	N/A	5.0	2.7	2.3
M10 x 1.5 6H	N/A	5.0	2.7	2.3


DL DLA



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Aluminium Clear protective coating	Aluminium Couche protectrice claire	Aluminium Klare Schutzschicht	Aluminium Strato protezione chiaro	Aluminium Capa protectora clara

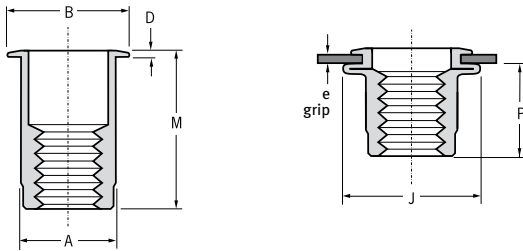

Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +0.15/-0	A	B	D	J	M	P	Part No/ref
	min.	max.		max.	±0.25	±0.08	max.	±0.38	max.	
M4 x 0.7 6H	0.5	2.0	6.80	6.75	9.91	0.76	9.91	10.67	7.75	DLA-470-2.0
	2.0	3.3						11.94		
M5 x 0.8 6H	0.5	3.3	7.60	7.55	10.54	0.76	11.43	12.07	8.00	DLA-580-3.3
	3.3	5.7						14.86		
M6 x 1.0 6H	0.7	4.2	10.00	9.90	12.70	0.76	11.43	14.73	9.65	DLA-610-4.2
	4.2	6.6						17.27		
M8 x 1.25 6H	0.7	3.8	13.50	13.45	17.40	0.89	13.97	17.53	11.94	DLA-8125-3.8
	3.8	7.9						20.45	10.80	DLA-8125-7.9
M10 x 1.5 6H	0.7	3.8	13.50	13.45	17.40	0.89	13.97	17.53	11.94	DLA-1015-3.8
	3.8	7.9						20.45	10.80	DLA-1015-7.9


all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

DL DLS



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

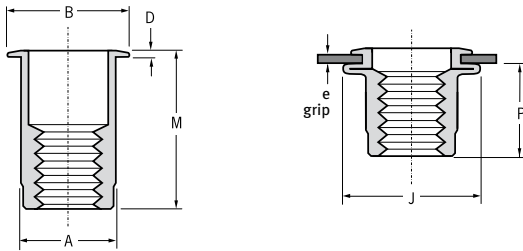

Thread / filetage / Gewinde / filetto / rosca	e (grip)		6.80	A max.	B ±0.25	D ±0.08	J max.	M ±0.38	P max.	Part No/ref
	min.	max.								
M4 x 0.7 6H	0.5	2.0	7.60	6.75	9.91	0.76	9.91	10.67	7.75	DLS-470-2.0
	2.0	3.3						11.94		DLS-470-3.3
M5 x 0.8 6H	0.5	3.3	10.00	7.55	10.54	0.76	11.43	12.07	8.00	DLS-580-3.3
	3.3	5.7						14.86		DLS-580-5.7
M6 x 1.0 6H	0.7	4.2	13.50	9.90	12.70	0.89	13.97	14.73	9.65	DLS-610-4.2
	4.2	6.6						17.27		DLS-610-6.6
M8 x 1.25 6H	0.7	3.8	13.50	13.45	17.40	0.89	13.97	17.53	11.94	DLS-8125-3.8
	3.8	7.9						20.45	10.80	DLS-8125-7.9
M10 x 1.5 6H	0.7	3.8	13.50	13.45	17.40	0.89	13.97	17.53	11.94	DLS-1015-3.8
	3.8	7.9						20.45	10.80	DLS-1015-7.9

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread / filetage / Gewinde / filetto / rosca	Recommended max torque	Pull-out	Torque-to-turn	Push-out
	Nm	kN	Nm	kN
M4 x 0.7 6H	6.2	2.3	1.1	0.8
M5 x 0.8 6H	10.7	2.8	1.4	1.5
M6 x 1.0 6H	18.1	3.0	1.4	1.4
M8 x 1.25 6H	N/A	5.0	2.7	2.3
M10 x 1.5 6H	N/A	5.0	2.7	2.3