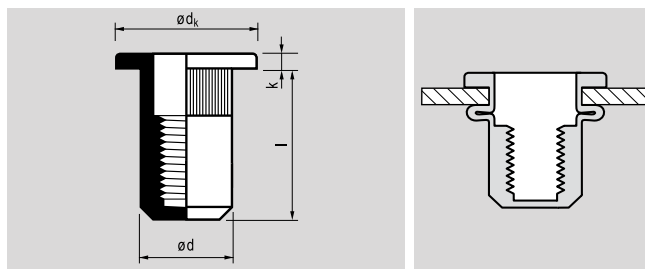










MFX 23-CG

Stal
O cynk



MASTERGRIP I zamknięte I kołnierz cylindryczny

$\varnothing d$ [mm]	l [+0,1/-0,6] [mm]	 [mm]	Indeks nr	$\varnothing d_k$ [mm]	k [mm]	$\varnothing d$ [+0/-0,12] [mm]	 [Nm]	 [N]	 [N]
M4  $\varnothing 6,0$	15,5	0,3-3,0	23M04CG30	9,0 [+0/-0,5]	$\leq 1,1$	5,9	4,5	7.840	1.660
M5  $\varnothing 7,0$	18,0	0,3-3,0	23M05CG30	10,0 [+0/-0,5]	$\leq 1,1$	6,9	6,0	11.074	2.760
M6  $\varnothing 9,0$	20,5	0,5-3,0	23M06CG30	12,0 [+0/-0,5]	$\leq 1,6$	8,9	20,0	17.640	3.430
M8  $\varnothing 11,0$	25,0	0,5-3,0	23M08CG30	15,0 [+0/-0,5]	$\leq 1,6$	10,9	29,0	27.440	4.410