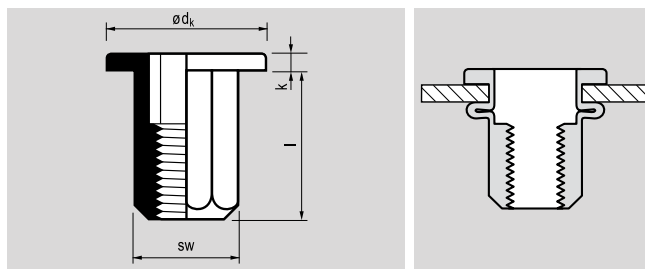











MFX 23-HCO

Stal
O cynk



MASTERGRIP | otwarte | kołnierz cylindryczny | sześciokątne

$\varnothing d$	l [+/- 0,4]		Indeks nr	$\varnothing d_k$	k	SW [+0/-0,2]			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M4  SW1 6,1	11,5	0,5-3,0	23H04C030	9,3 [+/-0,3]	$\leq 1,1$	6,0	8,0	6.270	2.330
M5  SW1 7,1	13,5	0,5-3,0	23H05C030	10,3 [+/-0,3]	$\leq 1,1$	7,0	12,0	10.780	3.610
M6  SW1 9,1	15,5	0,5-3,0	23H06C030	12,3 [+/-0,2]	$\leq 1,7$	9,0	20,5	17.640	4.220
M8  SW1 11,1	17,5	0,5-3,0	23H08C030	14,3 [+/-0,2]	$\leq 1,7$	11,0	26,5	27.440	4.900
M10  SW1 13,1	22,0	1,0-4,0	23H10C040	16,3 [+/-0,2]	$\leq 2,2$	13,0	40,0	29.400	5.880