


MFX 23-V0

Stal
Ocynk

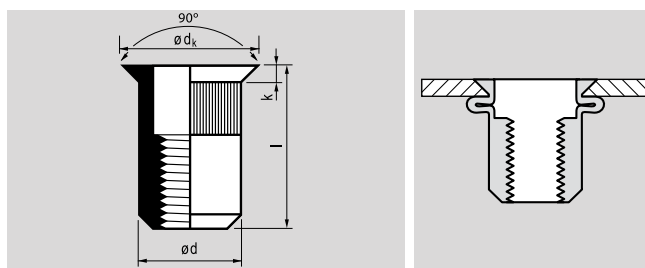

MASTERGRIP | otwarte | kołnierz wpuszczany

$\varnothing d$	l [+0,5/-0]		Indeks nr	$\varnothing d_k$	k	$\varnothing d$ [+0/-0,12]			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M4	11,5	2,0-3,5	23M04V035	9,0 [+0,3/-0,7]	$\leq 1,7$	5,9	4,0	7.860	2.210
 $\varnothing 6,0$									
M5	13,5	2,0-4,0	23M05V040	10,0 [+0,3/-0,7]	$\leq 1,7$	6,9	5,0	10.780	2.320
 $\varnothing 7,0$									
M6	16,0	2,0-4,5	23M06V045	12,0 [+0,3/-0,7]	$\leq 1,7$	8,9	16,0	16.660	3.660
 $\varnothing 9,0$									
M8	19,0	2,0-4,5	23M08V045	14,0 [+0,3/-0,7]	$\leq 1,7$	10,9	18,0	30.840	4.720
 $\varnothing 11,0$									
M10	21,0	2,0-4,5	23M10V045	14,7 [+0/-0,4]	$\leq 1,7$	11,9	28,0	34.300	5.050
 $\varnothing 12,0$									