


MFX 24-CO

Stal nierdzewna [A2]
Polerowany

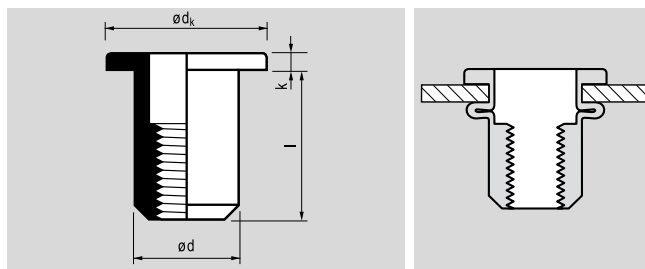

MASTERGRIP I otwarte I kołnierz cylindryczny

$\varnothing d$	l		Indeks nr	$\varnothing d_k$	k	$\varnothing d$ [+0/-0,2]			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M4	10,0 [+0/-1,3]	0,3-2,5	24M04C025	9,0 [+0/-0,5]	$\leq 1,1$	5,9	7,0	6.860	2.640
 $\varnothing 6,0$	11,5 [+0/-1,3]	2,5-4,0	C040	9,0 [+0/-0,5]	$\leq 1,1$	5,9	7,0	6.860	2.640
M5	12,0 [+0/-1,3]	0,3-3,0	24M05C030	10,0 [+0/-0,5]	$\leq 1,1$	6,9	10,0	11.760	2.940
 $\varnothing 7,0$	13,5 [+0/-1,3]	3,1-4,0	C040	10,0 [+0/-0,5]	$\leq 1,1$	6,9	12,0	11.760	3.920
M6	14,5 [+0/-1,8]	0,5-3,0	24M06C030	12,0 [+0/-0,5]	$\leq 1,6$	8,9	20,0	18.620	4.900
 $\varnothing 9,0$	16,0 [+0/-1,8]	3,1-4,5	C045	12,0 [+0/-0,5]	$\leq 1,6$	8,9	22,0	20.580	5.630
M8	16,0 [+0/-1,8]	0,5-3,0	24M08C030	15,0 [+0/-0,5]	$\leq 1,6$	10,9	28,0	24.500	6.860
 $\varnothing 11,0$	18,5 [+0/-1,8]	3,1-5,5	C055	15,0 [+0/-0,5]	$\leq 1,6$	10,9	29,0	26.460	6.860
M10	17,0 [+0/-2,3]	0,5-3,0	24M10C030	16,0 [+0/-0,5]	$\leq 2,1$	12,9	38,0	29.400	7.840
 $\varnothing 13,0$	20,0 [+0/-2,3]	3,1-5,5	C055	16,0 [+0/-0,5]	$\leq 2,1$	12,9	39,0	35.280	7.840