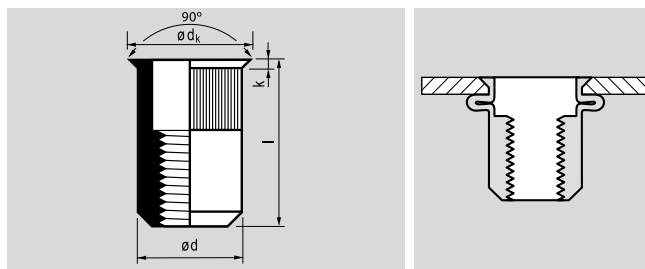











MFX 27-V0

Stal
O cynk



MASTERGRIP I otwarte I kołnierz wpuszczany mini

$\varnothing d$ [mm]	l [+0,5/-0] [mm]	 [mm]	Indeks nr	$\varnothing d_k$ [mm]	k [mm]	$\varnothing d$ [+0/-0,12] [mm]	 [Nm]	 [N]	 [N]
M4  $\varnothing 6,0$	10,0	0,5-3,0	27M04V030	7,0 [+0/-0,5]	$\leq 0,7$	5,9	4,0	6.470	1.620
M5  $\varnothing 7,0$	11,5	0,5-3,0	27M05V030	8,0 [+0/-0,5]	$\leq 0,7$	6,9	5,0	9.090	2.190
M6  $\varnothing 9,0$	14,0	0,5-3,0	27M06V030	10,0 [+0/-0,5]	$\leq 0,7$	8,9	15,0	16.660	2.350
M8  $\varnothing 11,0$	15,5	0,5-3,0	27M08V030	12,0 [+0/-0,3]	$\leq 0,7$	10,9	18,0	21.610	2.840
M10  $\varnothing 12,0$	20,0	0,8-3,5	27M10V035	13,5 [+0/-0,5]	$\leq 0,9$	11,9	30,0	31.750	4.260