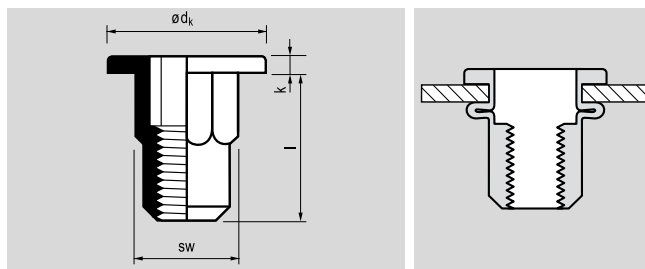










# MFX 2CO-HTCO

Stal  
O cynk



## otwarte | kołnierz cylindryczny | sześciokątne

$\varnothing d$	l		Indeks nr	$\varnothing d_k$	k	SW			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
<b>M4</b>	10,5	0,3-2,0	<b>2COHT04CO20</b>	9,0	$\leq 0,8$	5,9	3,0	6.800	2.200
 SW1 6,0									
<b>M5</b>	13,0	0,7-3,0	<b>2COHT05CO30</b>	10,0	$\leq 1,0$	6,9	6,0	10.000	3.300
 SW1 7,0									
<b>M6</b>	16,0	0,5-3,0	<b>2COHT06CO30</b>	13,0	$\leq 1,5$	8,9	10,0	15.000	4.400
 SW1 9,0									
<b>M8</b>	17,0	0,5-3,5	<b>2COHT08CO30</b>	16,0	$\leq 1,5$	10,9	24,0	27.000	5.200
 SW1 11,0									