




Stal nierdzewna [A2] Polerowany



Półsześciokątne otwarte | kołnierz wpuszczany mini

Ø d	l [+0,5/-0,3]		Indeks nr	Ø d _k	k ≤	SW [+0/-0,2]			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M4  SW1 6,1	12,5	0,5-3,0	BS04IOMP30	7,0	0,9	6,0	12,0	8.240	2.950
M5  SW1 7,1	14,0	0,5-3,0	BS05IOMP30	8,0	0,9	7,0	12,0	11.760	2.950
M6  SW1 9,1	16,0	0,5-3,0	BS06IOMP30	10,0	0,9	9,0	21,0	21.560	3.820
M8  SW1 11,1	17,0 19,6	0,5-3,0 3,5-6,0	BS08IOMP30 BS08IOMP60	12,0	0,9	11,0	30,0	24.500	3.920
M10  SW1 13,1	20,5	0,8-4,0	BS10IOMP40	14,5	1,1	13,0	40,0	47.040	5.010

W ofercie nitonakrętki o niestandardowych wymiarach.

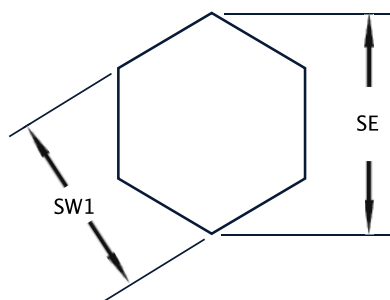

SW: Wymiar zewnętrzny nitonakrętki bok do boku

SW1: Wymiar wewnętrzny nitonakrętki bok do boku

SE: Wymiar wewnętrzny nitonakrętki wierzchołek do wierzchołka