246

246
Pneudraulic Installation Tool

Specifications

Weight:
5.03 kg (11.1 lbs.)

Required Air Pressure:
6.21-6.9 bar (90-100 psi)

Stroke:
22.4 mm (0.88")

Air Consumption:
22.5 CFM (637 l/min) based on 18-20 cycles per ins/minute

Capacity:
44.42 kN @ 621 bar
(9986 lbs @ 90 psi)

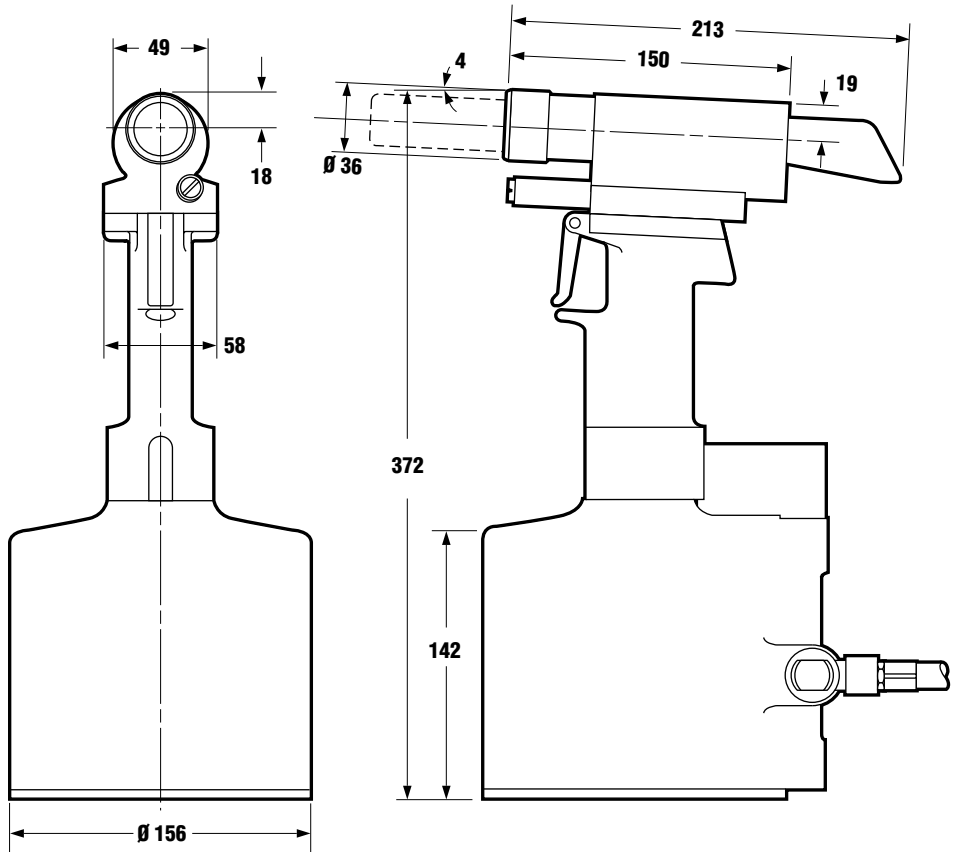

246

Some Fasteners & Nose Assemblies for use with the 246 Tool

Type	Diameter	Nose Assembly
BOM	4.8 mm (3/16")	**99-1053**
	6.4 mm (1/4")	**99-830-1**
MAGNA-LOK	9.5 mm (3/8")	**99-3318**
MAGNA-BULB	7.9 mm (5/16")	**99-3307**
C6L/C120L	4.8 mm (3/16")	99-2558, 99-2559
	6.4 mm (1/4")	99-2564, 99-2565
	7.9 mm (5/16")	**99-99-245**
	9.5 mm (3/8")	**99-100-245**, 99-100-1D2
MAGNA-GRIP	4.8 mm (3/16")	99-3206
	6.4 mm (1/4")	99-3207
	7.9 mm (5/16")	**99-1439**
	9.5 mm (3/8")	**99-1440**
HUCKTAINER	9.5 mm (3/8")	99-3438
FLOORTIGHT	7.9 mm (5/16")	**99-3452**

Items in **bold** are part of our FOCUS Tooling Range