





Aluminium [AlMg2,5]

Polerowany



Stal

Ocynk

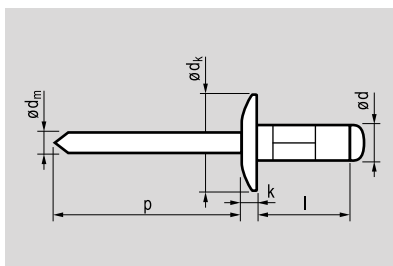

PLIA I multigrip I kołnierz powiększony

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	8,0	05,-5,0	10023208	9,5 [+0/-0,5]	≤2,0	~1,78	≥27	980	680
[+0,05/-0,13]	9,5	2,0-6,5	3209						
	10,0	2,5-7,0	3210						
Ø 3,3 [3,5 max]	11,1	3,5-8,0	3211						
	12,0	4,5-9,0	3212						
	14,0	6,5-11,0	3214						
	16,0	8,5-13,0	3216						
4,0	8,0	0,5-4,5	10024008	12,0 [+0/-0,5]	≤2,5	~2,18	≥27	1.600	1.150
[+0,05/-0,13]	10,0	1,5-6,5	4010						
	11,1	2,5-7,5	4011						
Ø 4,1 [4,3 max]	12,0	3,5-8,5	4012						
	12,7	4,0-9,5	4013						
	14,0	5,5-10,5	4014						
	16,0	7,5-12,5	4016						
	17,0	8,5-13,5	4017						
	18,0	9,5-14,5	4018						
	20,0	11,5-16,5	4020						
4,8	10,0	0,5-5,0	10024810	14,0 [+0/-0,5]	≤2,5	~2,78	≥27	2.350	1.500
[+0,05/-0,13]	12,0	2,0-7,0	4812						
	14,0	4,0-9,0	4814						
Ø 4,9 [5,2 max]	16,0	6,0-11,0	4816						
	18,0	8,0-13,0	4818						
	20,0	10,0-15,0	4820						