





Stal
Ocynk

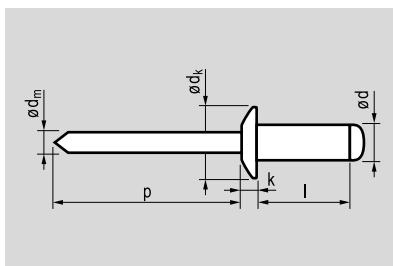

Stal
Ocynk



otwarte I kołnierz standardowy



Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,0	6,0	1,5-3,0	10413006	6,5 [+0/-0,7]	0,8 [+/-0,2]	~1,90	≥27	1.125	915
[+0,08/-0,10]	8,0	3,0-5,0	3008						
	10,0	5,0-7,0	3010						
Ø 3,1	12,0	7,0-9,0	3012						
	14,0	9,0-11,0	3014						
3,2	6,0	1,5-3,0	10413206	6,5 [+0/-0,7]	0,8 [+/-0,2]	~2,00	≥27	1.285	1.060
[+0,08/-0,10]	8,0	3,0-5,0	3208						
	10,0	5,0-7,0	3210						
Ø 3,3	12,0	7,0-9,0	3212						
	14,0	9,0-11,0	3214						
	16,0	11,0-13,0	3216						
4,0	6,0	1,5-2,5	10414006	8,0 [+0/-1,0]	1,0 [+/-0,3]	~2,50	≥27	1.990	1.550
[+0,08/-0,15]	8,0	2,5-4,5	4008						
	10,0	4,5-6,5	4010						
Ø 4,1	12,0	6,5-8,5	4012						
	14,0	8,5-10,5	4014						
	16,0	10,5-12,5	4016						
	18,0	12,5-14,5	4018						
	20,0	14,5-16,5	4020						
4,8	6,0	1,0-2,5	10414806	9,5 [+0/-1,0]	1,1 [+/-0,3]	~2,90	≥27	2.920	2.300
[+0,08/-0,15]	8,0	2,5-4,5	4808						
	10,0	4,5-6,0	4810						
Ø 4,9	12,0	6,0-8,0	4812						
	14,0	8,0-10,0	4814						
	16,0	10,0-11,5	4816						
	18,0	11,5-13,5	4818						
	20,0	13,5-15,0	4820						
	22,0	15,0-17,0	4822						
	25,0	17,0-20,0	4825						
	28,0	20,0-23,0	4828						
	30,0	23,0-26,0	4830						
5,0	8,0	2,5-4,0	10415008	9,5 [+0/-1,0]	1,1 [+/-0,3]	~2,90	≥27	3.255	2.575
[+0,08/-0,15]	10,0	4,0-6,0	5010						
	12,0	6,0-8,0	5012						
Ø 5,1	14,0	8,0-10,0	5014						
	16,0	10,0-11,5	5016						
	18,0	11,5-13,5	5018						
	20,0	13,5-15,0	5020						



Stal
Ocynk



Stal
Ocynk

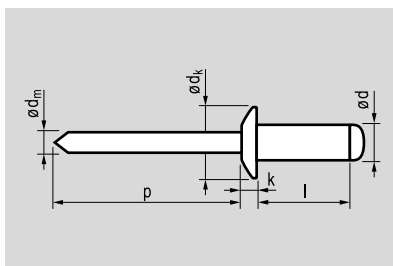

otwarte I kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
6,0	12,0	3,5-6,5	10416012	12,0 [+0/-1,5]	1,5 [+/-0,4]	~3,60	≥31	5.020	4.040
[+0,08/-0,15]	15,0	6,5-9,5	6015						
	18,0	9,5-12,5	6018						
Ø 6,1	22,0	13,5-16,5	6022						
	26,0	17,5-20,5	6026						
	30,0	21,5-24,5	6030						
6,4	12,0	3,5-6,5	10416412	13,0 [+0/-1,5]	1,8 [+/-0,4]	~3,85	≥31	5.415	4.355
[+0,08/-0,15]	15,0	6,5-9,5	6415						
	18,0	9,5-12,5	6418						
Ø 6,5	22,0	14,5-16,5	6422						
	26,0	18,5-20,5	6426						
	30,0	22,5-24,5	6430						