





Stal nierdzewna [A2]
Polerowany

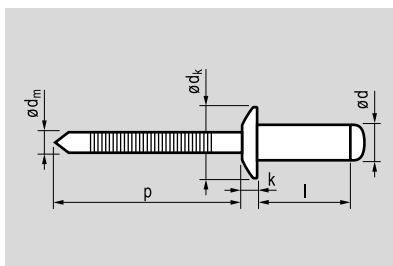

Stal nierdzewna [A2]
Polerowany



otwarte i kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,0	6,0	1,5-2,5	10513006						
[+0,08/-0,10]	8,0	2,5-4,5	3008	6,5	0,8	~1,90	≥27	2.000	1.600
	10,0	4,5-6,5	3010	[+0/-0,7]	[+/-0,2]				
Ø 3,1	12,0	6,5-8,5	3012						
3,2	4,0	~1,5	10513204						
[+0,08/-0,10]	6,0	1,5-2,5	3206						
	8,0	2,5-4,5	3208	6,5	0,8	~2,00	≥27	2.500	1.800
Ø 3,3	10,0	4,5-6,5	3210	[+0/-0,7]	[+/-0,2]				
	12,0	6,5-8,5	3212						
	15,0	8,5-12,0	3215						
	18,0	12,0-15,0	3218						
4,0	6,0	~2,0	10514006						
[+0,08/-0,15]	8,0	2,0-4,0	4008						
	10,0	4,0-6,0	4010	8,0	1,0	~2,50	≥27	3.800	3.100
Ø 4,1	13,0	7,0-9,0	4013	[+0/-1,0]	[+/-0,3]				
	16,0	10,0-12,0	4016						
	18,0	12,0-14,0	4018						
	20,0	14,0-16,0	4020						
4,8	8,0	1,5-3,0	10514808						
[+0,08/-0,15]	10,0	3,0-5,0	4810						
	12,0	5,0-7,0	4812	9,5	1,1	~2,90	≥27	6.000	4.500
Ø 4,9	14,0	7,0-9,0	4814	[+0/-1,0]	[+/-0,3]				
	16,0	9,0-11,0	4816						
	18,0	11,0-13,0	4818						
	20,0	13,0-15,0	4820						
5,0	8,0	1,5-3,0	10515008						
[+0,08/-0,15]	10,0	3,0-5,0	5010	9,5	1,1	~2,90	≥27	6.500	5.000
	12,0	5,0-7,0	5012	[+0/-1,0]	[+/-0,3]				
Ø 5,1	16,0	9,0-11,0	5016						
6,0	12,0	4,0-6,0	10516012						
[+0,08/-0,15]	15,0	6,0-9,0	6015	12,0	1,5	~3,60	≥31	8.830	6.500
	18,0	9,0-12,0	6018	[+0/-1,5]	[+/-0,4]				
Ø 6,1	20,0	11,0-14,0	6020						
6,4	12,0	4,5-6,5	10516412						
[+0,08/-0,15]	15,0	6,5-9,5	6415	12,0	2,1	~3,85	≥31	8.850	6.500
	18,0	9,5-12,5	6418	[+0/-1,5]	[+/-0,4]				
Ø 6,5	20,0	11,5-14,5	6420						
	25,0	17,0-20,0	6425						