





Stal
O cynk

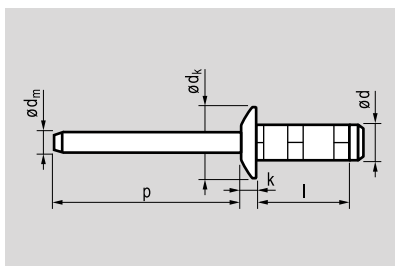

Stal
O cynk



PLIA I multigrip I kołnierz standardowy

Ø d	l		Indeks nr	Ø d _k	k	Ø d _m	p		
[mm]	[+1/-0,2]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	9,0	1,5-4,0	14613209						
[+0,08/-0,15]				7,2	1,00	~2,10	≥27	1.700	1.500
				[+/-0,25]	[+/-0,15]				
Ø 3,3									
4,0	10,8	1,5-4,5	14614010						
[+0,08/-0,15]	12,5	3,0-6,0	4012	8,1	1,20	~2,63	≥27	2.350	1.955
				[+/-0,25]	[+/-0,15]				
Ø 4,1									
4,8	10,2	1,5-4,5	14614810						
[+0,08/-0,15]	12,7	3,5-7,5	4812	9,8	1,75	~3,40	≥27	3.600	3.335
	17,5	8,0-12,0	4817	[+/-0,25]	[+/-0,25]				
Ø 4,9									