





**Stal**  
Ocynk

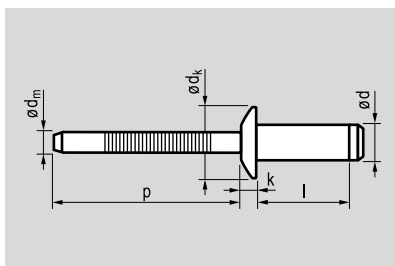

**Stal**  
Ocynk



## MASTERLOCK I wzmocnione I kołnierz standardowy

| Ø d                                                                               | l         |           | Indeks nr       | Ø d <sub>k</sub> | k               | Ø d <sub>m</sub> | p    |       |                           |
|-----------------------------------------------------------------------------------|-----------|-----------|-----------------|------------------|-----------------|------------------|------|-------|---------------------------|
| [mm]                                                                              | [+1/-0,3] | [mm]      |                 | [mm]             | [mm]            | [mm]             | [mm] | [N]   | [N]                       |
| <b>4,8</b>                                                                        | 9,0       | 1,5-3,5   | <b>14714809</b> | 9,8<br>[+/-0,3]  | 2,2<br>[+/-0,2] | ~3,02            | ≥32  | 3.600 | min. 3.920<br>max. 6.270  |
| [+0,11/-0,05]                                                                     | 11,5      | 3,5-6,0   | <b>4811</b>     |                  |                 |                  |      |       |                           |
|  | 14,0      | 6,0-8,5   | <b>4814</b>     |                  |                 |                  |      |       |                           |
| Ø 4,9 [5,1 max]                                                                   | 16,5      | 8,5-11,0  | <b>4816</b>     |                  |                 |                  |      |       |                           |
| <b>6,4</b>                                                                        | 10,5      | 2,8-4,8   | <b>14716410</b> | 13,0<br>[+/-0,3] | 3,0<br>[+/-0,2] | ~4,17            | ≥32  | 6.600 | min. 5.390<br>max. 11.180 |
| [+0,11/-0,05]                                                                     | 12,5      | 4,8-6,8   | <b>6412</b>     |                  |                 |                  |      |       |                           |
|  | 14,5      | 6,8-8,8   | <b>6414</b>     |                  |                 |                  |      |       |                           |
| Ø 6,6 [6,8 max]                                                                   | 16,5      | 8,8-10,8  | <b>6416</b>     |                  |                 |                  |      |       |                           |
|                                                                                   | 18,5      | 10,8-12,8 | <b>6418</b>     |                  |                 |                  |      |       |                           |
|                                                                                   | 20,5      | 12,8-14,8 | <b>6420</b>     |                  |                 |                  |      |       |                           |